



DIMENSIONAL DATA (MM)

A ±0.002	B ±0.002	D MIN.	E ±0.015	L ±0.015	N ±0.015
10	18.1	21.0	20.0	15.0	5.5
11	20.6	24.0	22.0	18.0	5.5
12	20.6	24.0	22.0	18.0	5.5
13	23.1	27.0	25.0	22.0	6.0
14	23.1	27.0	25.0	22.0	6.0
15	26.9	31.0	29.0	23.0	7.0
16	26.9	31.0	29.0	23.0	7.0
17	26.9	31.0	29.0	23.0	7.0
18	30.9	36.0	33.0	24.0	8.0
19	30.9	36.0	33.0	25.0	8.0
20	30.9	36.0	33.0	25.0	8.0
21	35.4	41.0	38.0	25.0	8.0
22	35.4	41.0	38.0	25.0	8.0
23	35.4	41.0	38.0	27.0	8.0
24	35.4	41.0	38.0	27.0	8.0
25	38.2	45.0	40.0	27.0	8.5
28	43.3	50.0	46.0	30.0	9.0
29	43.3	50.0	46.0	30.0	9.0
30	43.3	50.0	46.0	30.0	9.0
32	43.3	50.0	46.0	30.0	9.0
33	53.5	54.0	48.0	39.0	11.5
35	53.5	56.0	50.0	39.0	11.5
38	60.5	62.0	56.0	39.0	11.5
40	60.5	64.0	58.0	39.0	11.5

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 115 PSI (8.0Kg/cm²)

Temperature: -57 °C a 204 °C

**Depends on elastomer material*

-  **Metal Parts:** 304 Stainless Steel
-  **Stationary Face:** Graphite, Silicon Carbide, Tungsten Carbide
-  **Elastomer:** NBR (Nitrile), FKM (Viton®), EPR (EPDM)
-  **Rotary Face:** Ceramic, Silicon Carbide, Tungsten Carbide
-  **Spring:** 304 Stainless Steel

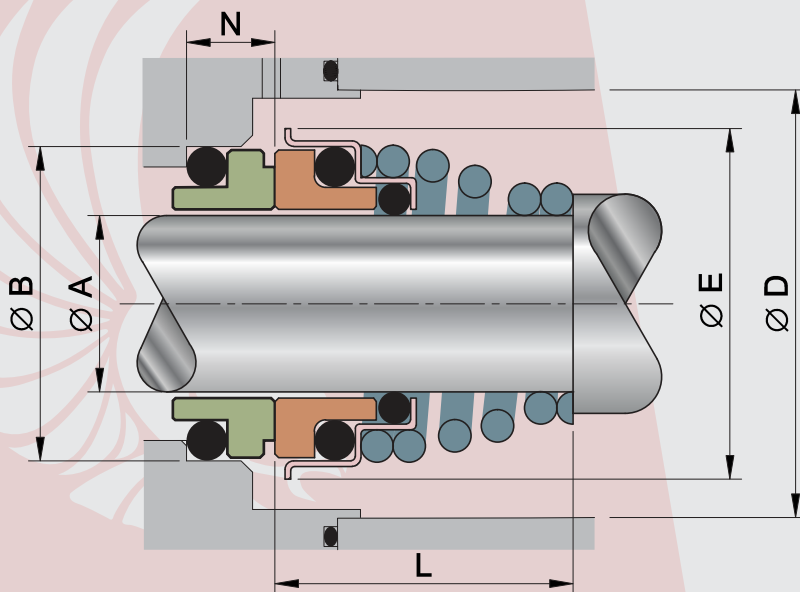

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

