



DIMENSIONAL DATA (MM)

A ±0.05	B ±0.05	C REF.	E MAX.	L ±0.5	N ±0.38
6	22.0	8.0	18.0	8.5	4.0
8	22.0	10.0	18.0	11.0	4.0
8	26.0	10.0	24.0	11.0	5.5
9	26.0	11.0	24.0	11.0	5.5
9	26.0	11.0	24.0	11.0	8.0
10	26.9	12.0	24.0	11.0	8.0
11	26.9	13.0	24.0	11.0	8.0
12	26.9	14.0	24.0	13.0	5.5
12A	26.0	14.0	24.0	13.0	8.0
13	26.0	15.0	24.0	13.0	8.0
14	29.5	16.0	32.0	13.0	8.0
15	29.5	17.0	32.0	13.0	8.0
16	29.5	18.0	32.0	13.0	8.0
17	42.0	19.0	39.0	13.0	8.0
18	42.0	20.0	39.0	13.0	8.0
19	42.0	21.0	39.0	13.0	8.0
20	42.0	22.0	39.0	13.0	8.0
20	45.0	22.0	42.0	13.0	10.0
22	45.0	24.0	42.0	13.0	10.0
24	50.0	26.0	47.0	14.0	10.0
25	50.0	27.0	47.0	14.0	10.0
28	57.0	30.0	54.0	15.0	10.0
30	57.0	32.0	54.0	15.0	10.0
32	57.0	34.0	54.0	15.0	10.0
35	63.0	37.0	60.0	16.0	10.0
38	68.0	40.0	65.0	18.0	12.0
40	68.0	42.0	65.0	18.0	12.0
45	73.0	47.0	70.0	20.0	12.0
50	88.0	52.0	85.0	23.0	15.0
55	88.0	57.0	85.0	23.0	15.0
60	110.0	62.0	105.0	30.0	15.0

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 75 PSI (5.3Kg/cm²)

Temperature: -57 °C a 204 °C

**Depends on elastomer material*

-  **Metal Parts:** 304 Stainless Steel
-  **Stationary Face:** Ceramic, Silicon Carbide
-  **Elastomer:** NBR (Nitrile), FKM (Viton®), EPR (EPDM)
-  **Rotary Face:** Phenolic Carbon, Graphite, Silicon Carbide
-  **Spring:** 304 Stainless Steel

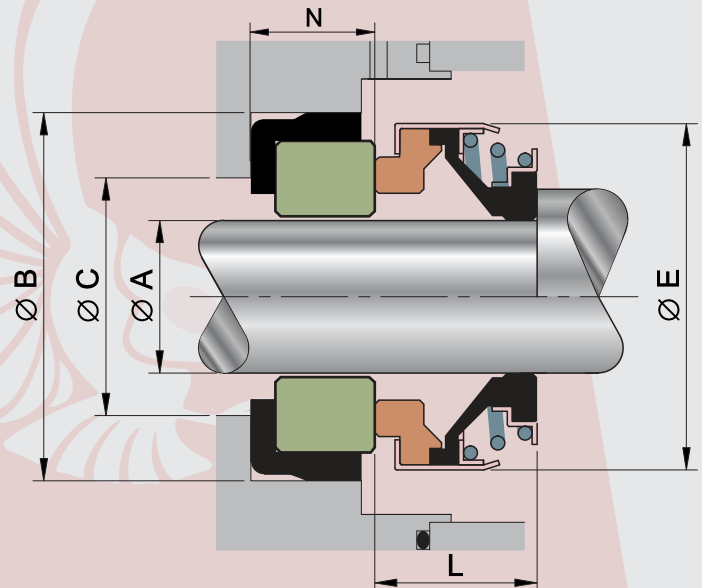

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

