



DIMENSIONAL DATA (MM)

A ±0.05	B ±0.05	C ±0.05	E MAX.	L ±0.5	M ±0.5	N ±0.12
10	21.0	17.0	20.0	17.5	5.5	10.0
12	23.0	19.0	22.0	17.5	5.5	10.0
14	25.0	21.0	25.0	17.5	5.5	10.0
16	27.0	23.0	27.0	19.5	5.5	10.0
18	33.0	27.0	30.0	20.5	7.0	11.5
20	35.0	29.0	32.0	22.0	7.0	11.5
22	37.0	31.0	35.0	23.5	7.0	11.5
24	39.0	33.0	38.0	25.0	7.0	11.5
25	40.0	34.0	40.0	26.5	7.0	11.5
28	43.0	37.0	43.0	26.5	7.0	11.5

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 145 PSI (10Kg/cm²)

Temperature: -57°C to 204°C

**Depends on elastomer material*

- **Metal Parts:** 316 Stainless Steel
- **Seat:** Stainless Steel, Silicon Carbide
- **Bellow:** NBR (Nitrile), FKM (Viton®), EPDM (EPDM)
- **Rotary Face:** Graphite
- **Spring:** 304, 316 Stainless Steel

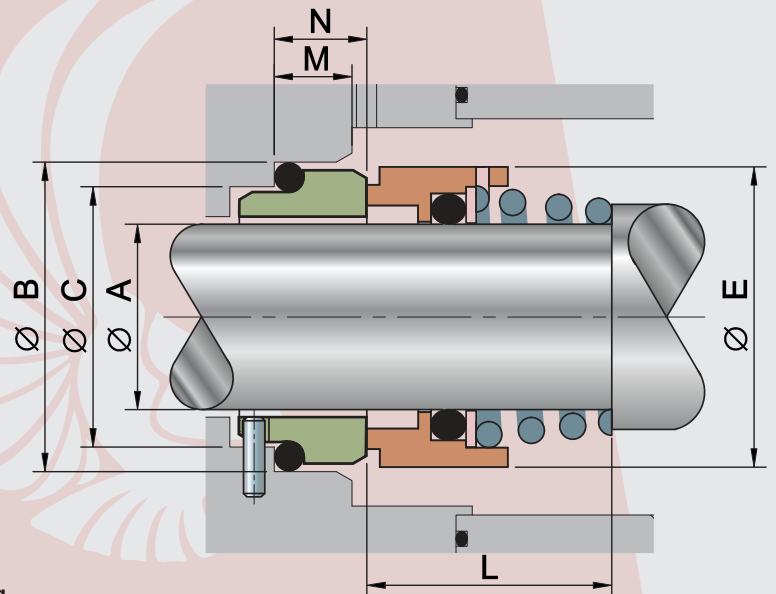

Also Available with stationary type G9 and right spring.

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

