



DIMENSIONAL DATA (MM)

A ±0.05	B ±0.05	C ±0.05	E MAX.	L ±0.5	M ±0.5	N ±0.12
10	21.0	17.0	19.0	15.5	5.5	10.0
12	23.0	19.0	21.0	16.0	5.5	10.0
14	25.0	21.0	23.0	16.5	5.5	10.0
16	27.0	23.0	26.0	18.0	5.5	10.5
18	33.0	27.0	29.0	19.5	7.0	11.5
20	35.0	29.0	31.0	22.0	7.0	11.5
22	37.0	31.0	33.0	21.5	7.0	11.5
24	39.0	33.0	35.0	23.5	7.0	11.5
25	40.0	34.0	36.0	26.5	7.0	11.5
28	43.0	37.0	40.0	26.5	7.0	11.5
30	45.0	39.0	43.0	26.5	7.0	11.5
32	48.0	42.0	46.0	28.5	7.0	11.5
33	48.0	42.0	47.0	28.5	7.0	11.5
35	50.0	44.0	49.0	28.5	7.0	11.5
38	56.0	49.0	53.0	33.5	8.0	14.0
40	58.0	51.0	56.0	36.0	8.0	14.0
43	61.0	54.0	59.0	38.5	8.0	14.0
45	63.0	56.0	61.0	39.5	8.0	14.0
48	66.0	59.0	64.0	46.0	8.0	14.0
50	70.0	62.0	66.0	45.0	8.5	15.0
53	73.0	65.0	69.0	47.0	8.5	15.0
55	75.0	67.0	71.0	49.0	8.5	15.0
58	78.0	70.0	76.0	55.0	8.5	15.0
60	80.0	72.0	78.0	55.0	8.5	15.0
63	83.0	75.0	83.0	55.0	8.5	15.0
65	85.0	77.0	84.0	55.0	8.5	15.0
68	90.0	81.0	88.0	55.0	9.5	18.0
70	92.0	83.0	90.0	57.0	9.5	18.0
75	97.0	88.0	98.0	62.0	9.5	18.0
80	105.0	95.0	100.0	61.8	10.0	18.2

OPERATING CONDITIONS

Speed: Up to 3,600 RPM.


Pressure: 145 PSI (10Kg/cm²)

Temperature: -57°C to 204°C

**Depends on elastomer material*

-  **Seat:** Graphite
-  **Bellow:** NBR (Nitrile), FKM (Viton®), EPDM (EPDM)
-  **Rotary Face:** 316 Stainless Steel
-  **Spring:** 304, 316 Stainless Steel

Also Available with stationary type G9 and right spring.

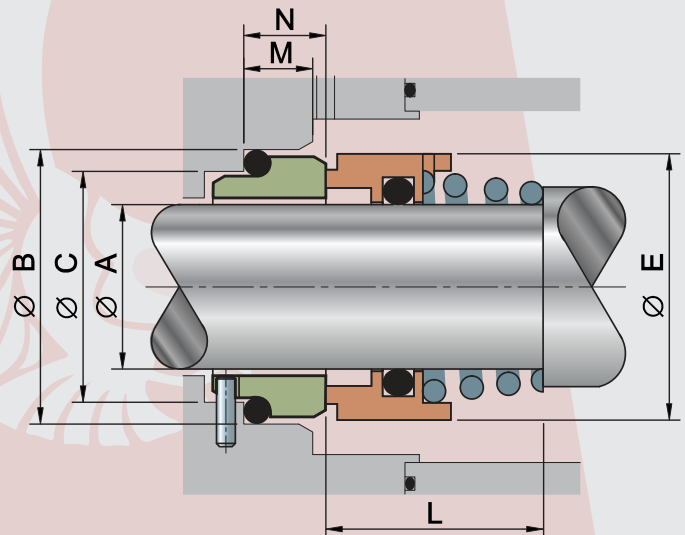

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

