



DIMENSIONAL DATA (MM)

SIZES	d	D	D1	L
CR-12	12	29	25	56.8
CR-16	16	34	30.5	59.5

OPERATING CONDITIONS

Speed: Up to 3,600 RPM.

Pressure: 174 PSI (12.2Kg/cm²)

Temperature: -57°C to 204°C*

**Depends on elastomer material*


 **Metal Parts:** 304, 316 Stainless Steel

 **Seat:** Silicon Carbide

 **Elastomer:** FKM (Viton®), E.P.R (EPDM)

 **Rotary Face:** Silicon Carbide

 **Spring:** 304, 316 Stainless Steel

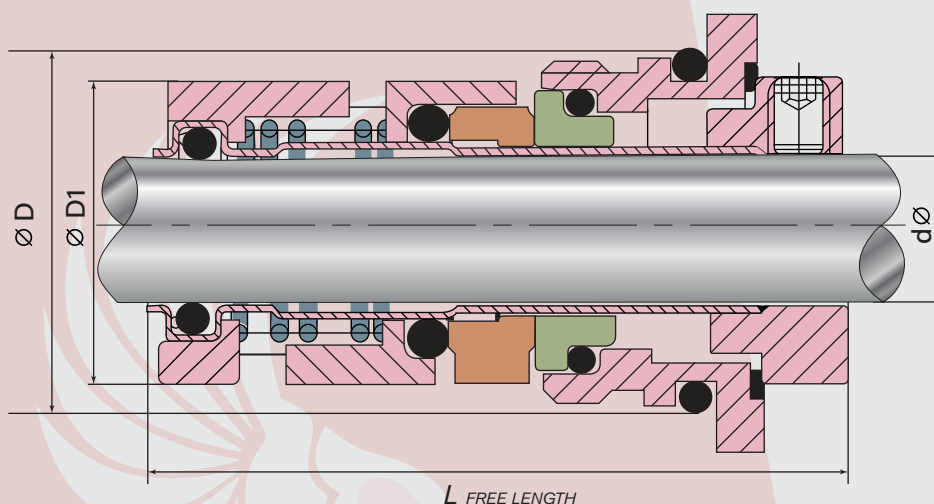

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

