



Used for Flygt Pump No.

2060/3041 - 171/3041 - 180/3041 -
 281/3057/3060/3066/3067 - 890/3067 -
 690/3067 - 590/3067 - 250/3067 - 170/3067 -
 090/3067 - 180/3068/3085 - 091/3085 -
 092/3085 - 120/3085 - 170/3085 - 171/3085 -
 172/3085 - 180/3085 - 181/3085 - 182/3085 -
 890/3085 - 891

OPERATING CONDITIONS


Speed: Up to 2,800 RPM.

Pressure: 94.27 PSI (6.63Kg/cm²)

Temperature: -15°C to 204°C*

**Depends on elastomer material*

-  **Metal Parts:** 304 Stainless Steel
-  **Seat:** Tungsten Carbide.
-  **Bellow:** FKM (Viton®)
-  **Rotary Face:** Tungsten Carbide
-  **Spring:** 304 Stainless Steel
-  **Seat Bellow:** FKM (Viton®)

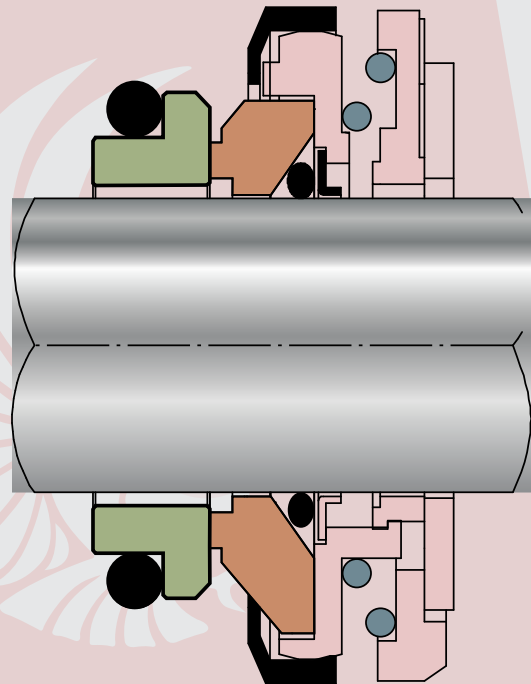

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

