



Used for Flygt Pump No.

3152/2201-011 LT/3140/4650/4660

## OPERATING CONDITIONS


**Speed:** Up to 2,800 RPM.

**Pressure:** 94.27 PSI (6.63Kg/cm<sup>2</sup>)

**Temperature:** -15°C to 204°C\*

*\*Depends on elastomer material*

-  **Metal Parts:** 304 Stainless Steel
-  **Seat:** Tungsten Carbide.
-  **Bellow:** FKM (Viton®)
-  **Rotary Face:** Tungsten Carbide
-  **Spring:** 304 Stainless Steel
-  **Seat Bellow:** FKM (Viton®)

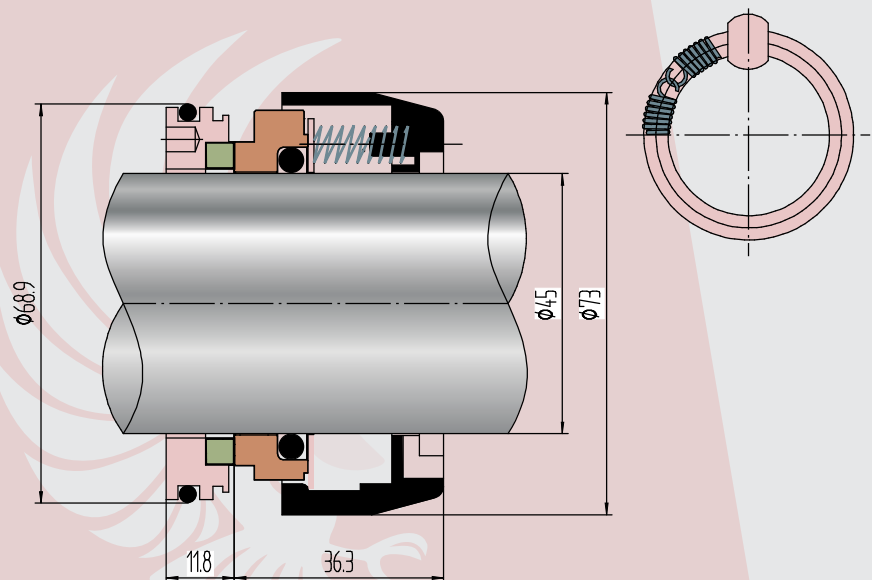

"If you have any questions regarding the materials and/or dimensions, please contact us at [sales@total-seals.com](mailto:sales@total-seals.com)

