



Used for Flygt Pump No.

2201 - 430/2201 - 320/2201 - 480/2201 -
590/2201 - 690

OPERATING CONDITIONS


Speed: Up to 2,800 RPM.

Pressure: 94.27 PSI (6.63Kg/cm²)

Temperature: -15°C to 204°C*

**Depends on elastomer material*

-  **Metal Parts:** 304 Stainless Steel
-  **Seat:** Tungsten Carbide.
-  **Bellow:** FKM (Viton®)
-  **Rotary Face:** Tungsten Carbide
-  **Spring:** 316 Stainless Steel
-  **Seat Bellow:** FKM (Viton®)

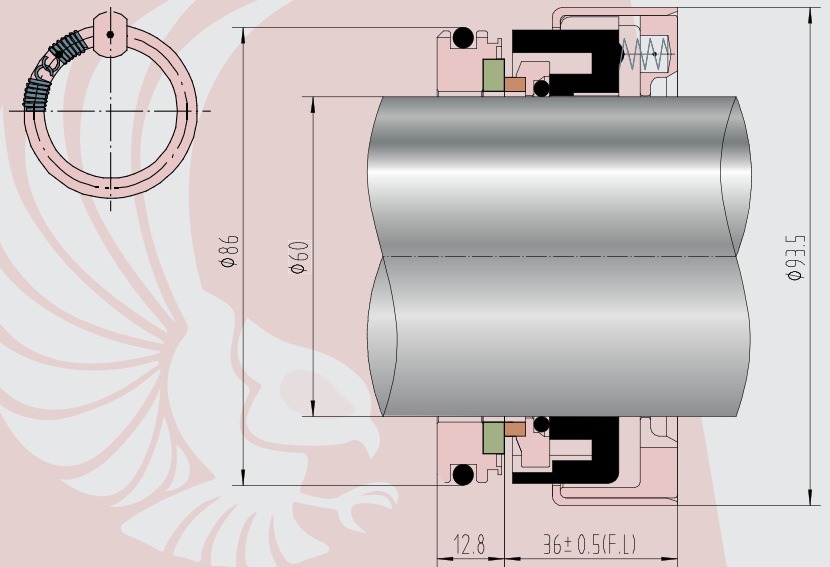

S

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

