



DIMENSIONAL DATA (MM)

SIZES	d	D	D ₁	L ₁	L ₂
12	12	22	23	7.6	26.4
16	16	26	27	8.7	26

OPERATING CONDITIONS


Speed: Up to 174 PSI (12Kg/cm²)

Pressure: 174 PSI (12Kg/cm²)

Temperature: -37°C to 204°C*

**Depends on elastomer material*

-  **Metal Parts:** 304, 316 Stainless Steel
-  **Seat:** Graphite, Silicon Carbide, Tungsten Carbide
-  **Elastomer:** NBR (Nitrile), FKM (Viton®)
-  **Rotary Face:** Silicon Carbide, Tungsten Carbide
-  **Spring:** 304, 316 Stainless Steel

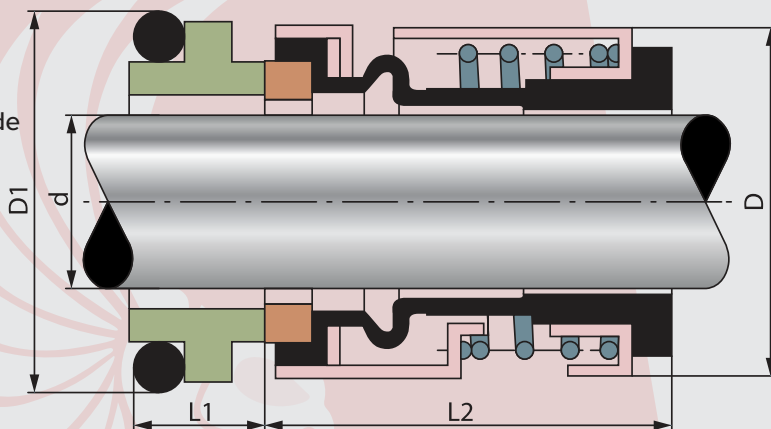

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

