



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	B ±0.002	D ±0.002	E ±0.015	L ±0.015
16	1.000	2.125	2.562	2.149	1.768
20	1.250	2.363	2.702	2.355	2.395
24	1.500	2.875	3.250	3.000	2.340
24	1.500	2.875	3.453	3.000	2.481

OPERATING CONDITIONS

Speed: Up to 3,600 RPM.

Pressure: 250 PSI (17.6Kg/cm²)

Temperature: -15°C to 204°C*

**Depends on elastomer material*


 **Metal Parts:** 304, 316 Stainless Steel

 **Seat:** Silicon Carbide

 **Bellow:** FKM (Viton®)

 **Rotary Face:** Silicon Carbide

 **Spring:** 304, 316 Stainless Steel

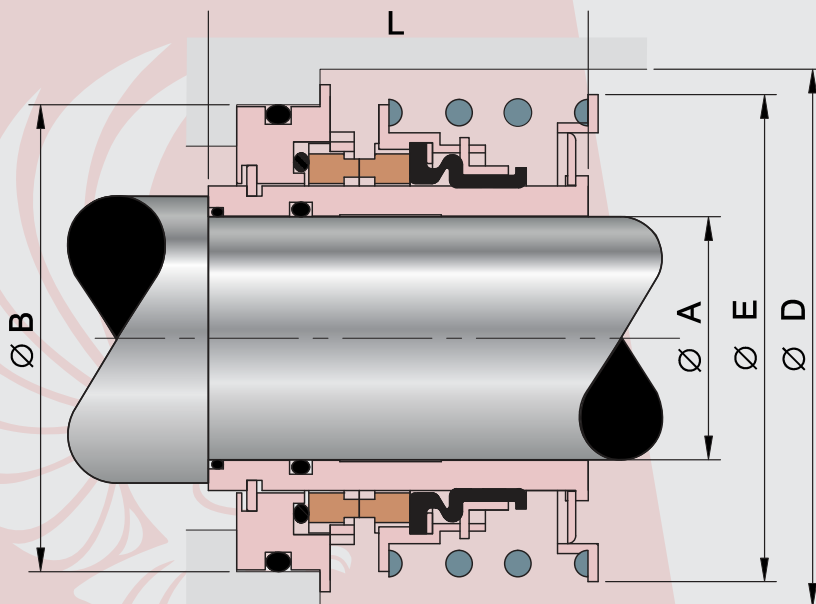

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

