



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	E ±0.015	L ±0.015	K ±0.015
12	3/4	1.855	1.062	0.440
16	1	1.855	1.062	0.440
18	1-1/8	2.120	1.000	0.440
24	1-1/2	2.610	1.187	0.440

OPERATING CONDITIONS

Speed: Up to 3,600 RPM.


Pressure: 145 PSI (10.2Kg/cm²)

Temperature: -57°C to 219°C

**Depends on elastomer material*

-  **Metal Parts:** 304, 316 Stainless Steel
-  **Seat:** Graphite, Silicon Carbide
-  **Bellow:** NBR (Nitrile), FKM FDA (Viton® FDA), Silicon (VMQ)
-  **Rotary Face:** Graphite FDA, Silicon Carbide
-  **Spring:** 304, 316 Stainless Steel

**For stationary part consult plant.*

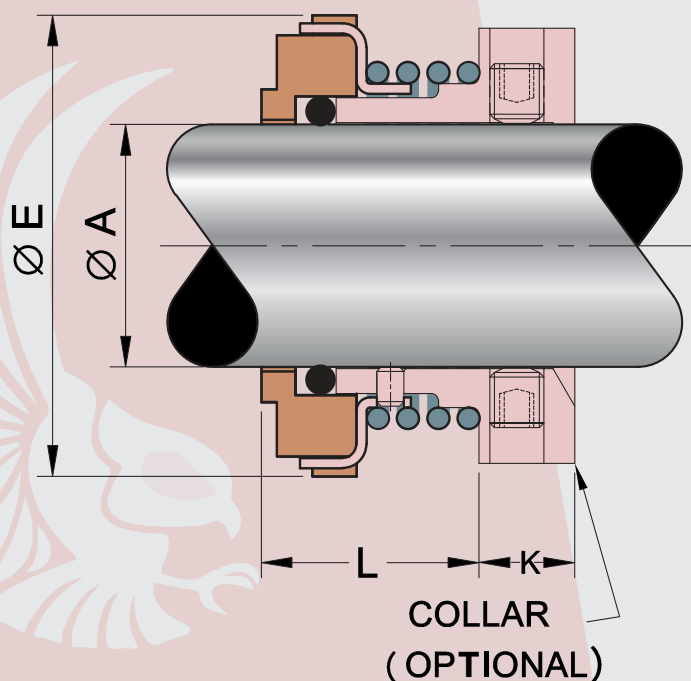

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

