



Vector
A.24
A.39
Serie Y
Sharp

Artemide[®]
ARCHITECTURAL

| | |
|----------------|-------|
| Vector | p.003 |
| A.24 | p.043 |
| A.39 | p.111 |
| Serie Y | p.142 |
| Sharp | p.166 |



For further information on Vector
visit artemide.com

Vector

With a simple and elegant form that hides a great mechanical and optoelectronic intelligence, Vector is able to respond, with richness and variety of performance, to all the needs of retail and not only.













Vector is smart design

Carlotta de Bevilacqua
2017

Vector typologies

Track 230V



Vector 40



| | | |
|--------|--------|--------|
| S 13° | F 20° | WF 28° |
| 10W | 10W | 10W |
| 540 lm | 584 lm | 528 lm |



Vector 55



| | | |
|---------|---------|---------|
| S 16° | F 22° | WF 32° |
| 25W | 25W | 25W |
| 1492 lm | 1465 lm | 1596 lm |



Vector 55 Zoom



| |
|---------------|
| F 22°- WF 32° |
| 23W |
| 1137 - 660 lm |



Vector 95



| | | |
|---------|---------|---------|
| S 16° | F 24° | WF 60° |
| 35W | 35W | 35W |
| 3118 lm | 3122 lm | 3119 lm |

Magnetic 48V



Vector 40



| | | |
|--------|--------|--------|
| S 13° | F 20° | WF 28° |
| 10W | 10W | 10W |
| 540 lm | 584 lm | 528 lm |



Vector 55



| | | |
|---------|---------|---------|
| S 16° | F 22° | WF 32° |
| 26W | 26W | 26W |
| 1492 lm | 1465 lm | 1596 lm |



Vector 55 Zoom



| |
|---------------|
| F 22°- WF 32° |
| 23W |
| 1137 - 660 lm |

Semirecessed



Vector 40



| | | |
|--------|--------|--------|
| S 13° | F 20° | WF 28° |
| 8W | 8W | 8W |
| 540 lm | 584 lm | 528 lm |



Vector 55




| | | |
|---------|---------|---------|
| S 16° | F 22° | WF 32° |
| 21W | 21W | 21W |
| 1492 lm | 1465 lm | 1596 lm |

Recessed




Vector 40



| | | |
|--------|--------|--------|
| S 13° | F 20° | WF 28° |
| 8W | 8W | 8W |
| 540 lm | 584 lm | 528 lm |



Vector 55



| | | |
|---------|---------|---------|
| S 16° | F 22° | WF 32° |
| 17,5W | 17,5W | 17,5W |
| 1248 lm | 1225 lm | 1356 lm |

Pendant magnetic 48V



Vector 40 Pendant



| | | |
|--------|--------|--------|
| S 13° | F 20° | WF 28° |
| 10W | 10W | 10W |
| 540 lm | 584 lm | 528 lm |



Vector 55 Pendant



| | | |
|---------|---------|---------|
| S 16° | F 22° | WF 32° |
| 26W | 26W | 26W |
| 1492 lm | 1465 lm | 1596 lm |

Vector colors



Fast delivery



**Delivery
time on demand**





Vector color temperatures



Fast delivery

2700K





4000K






Delivery time on demand

Magnetic

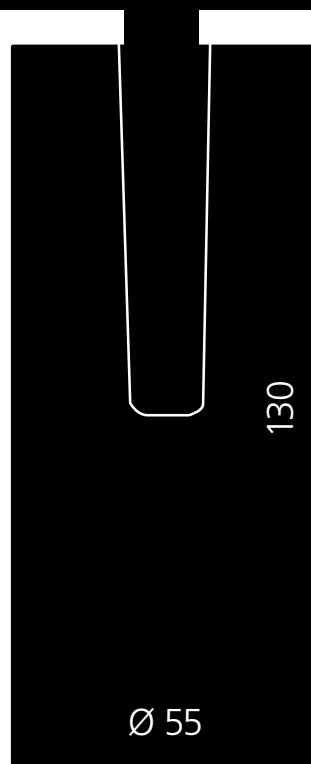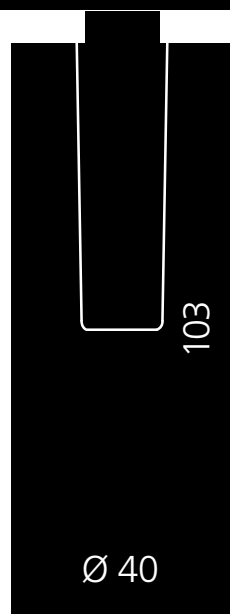


Vector dimensions


Track

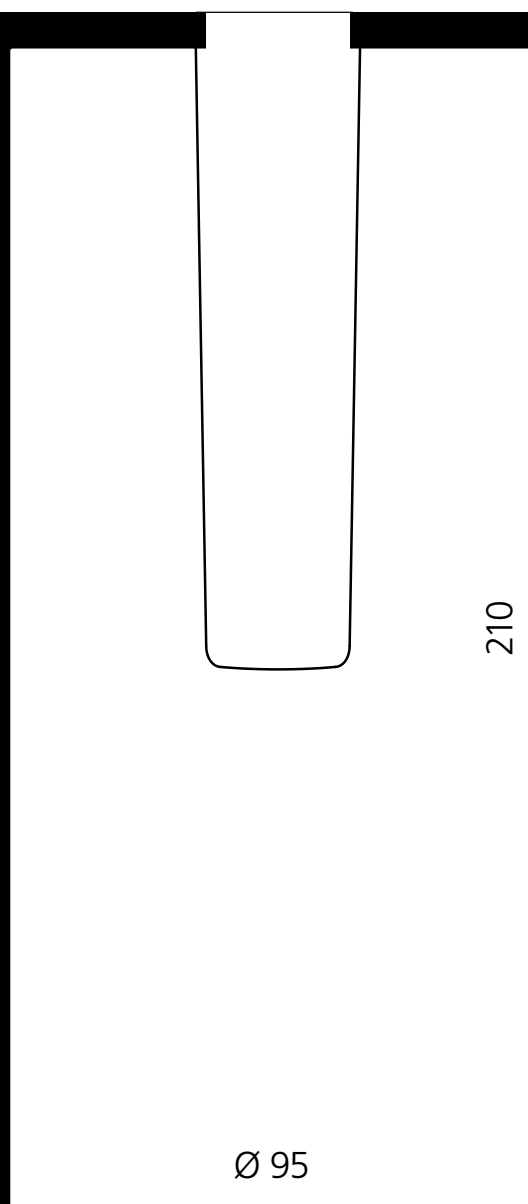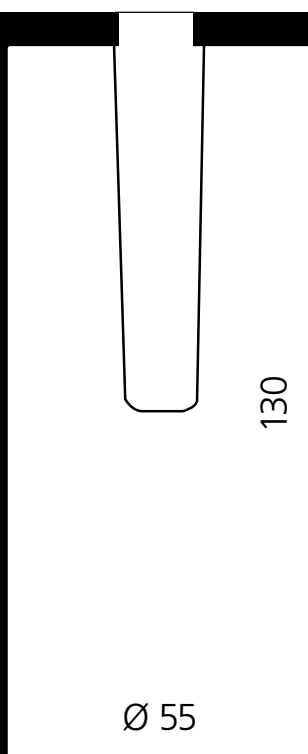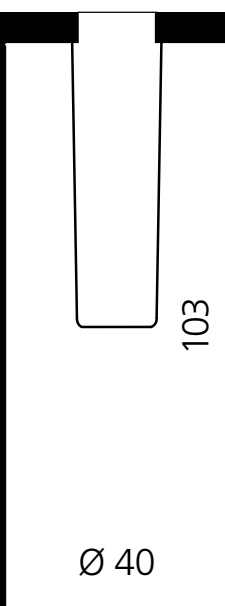

Vector is fully addressable

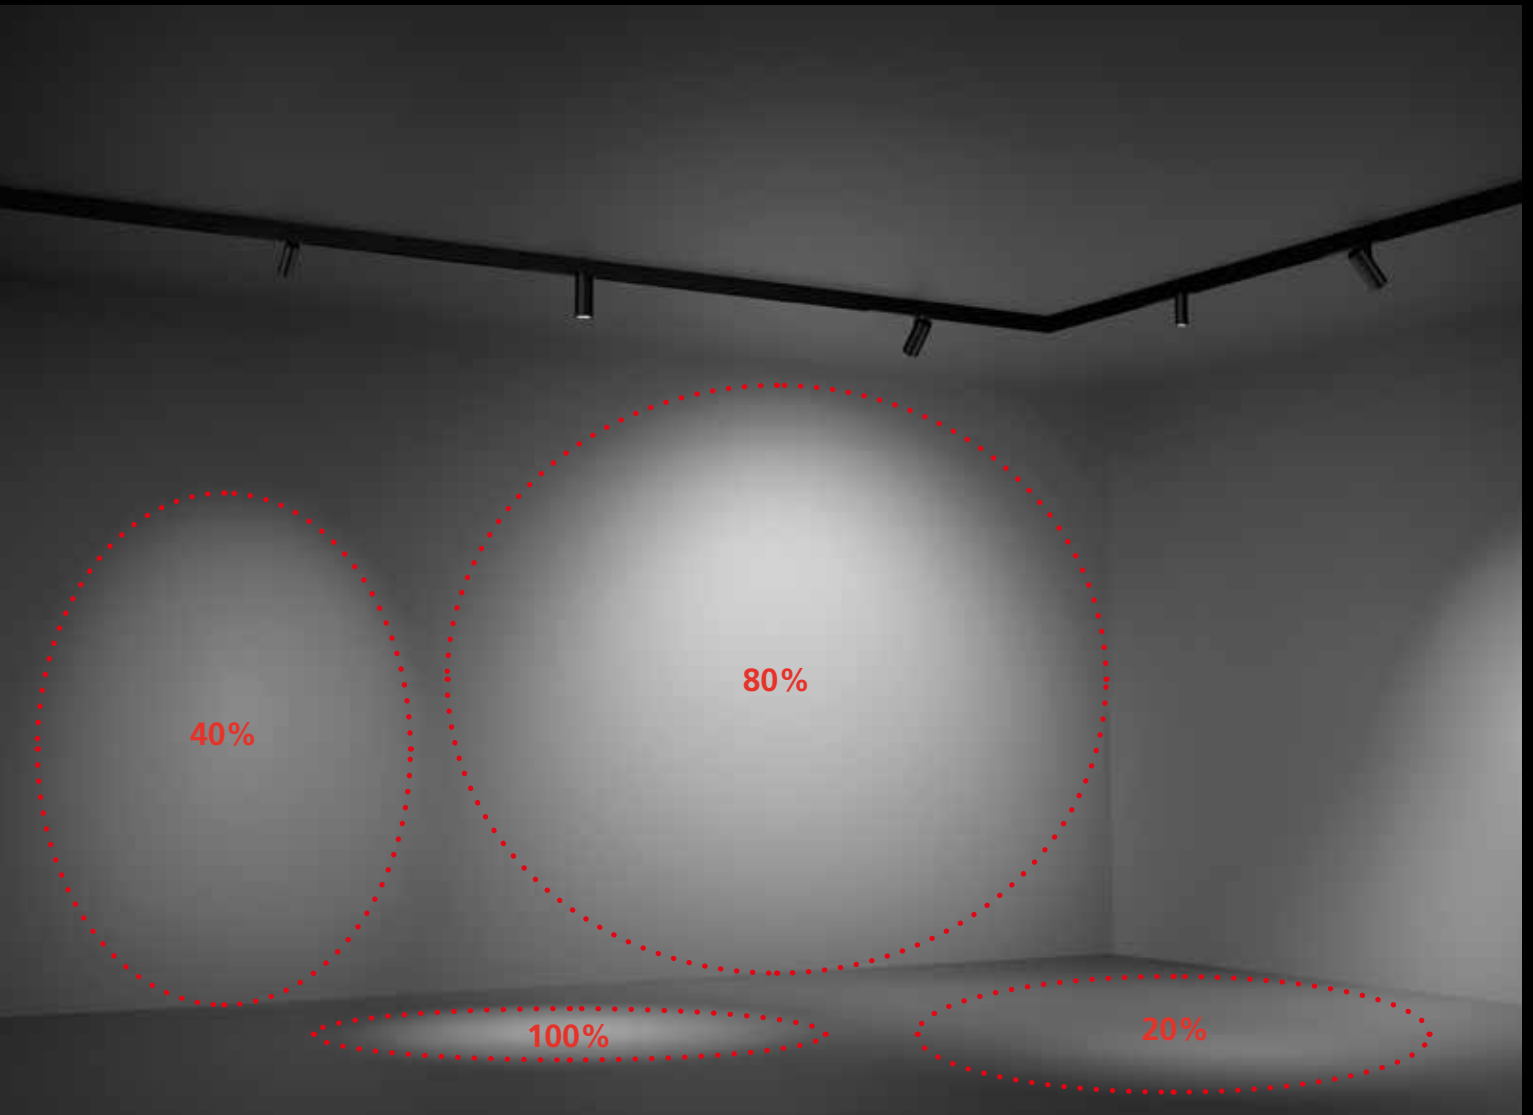


**Each spot can be managed separately by
Artemide App or DALI control
up to 64 IP Address**

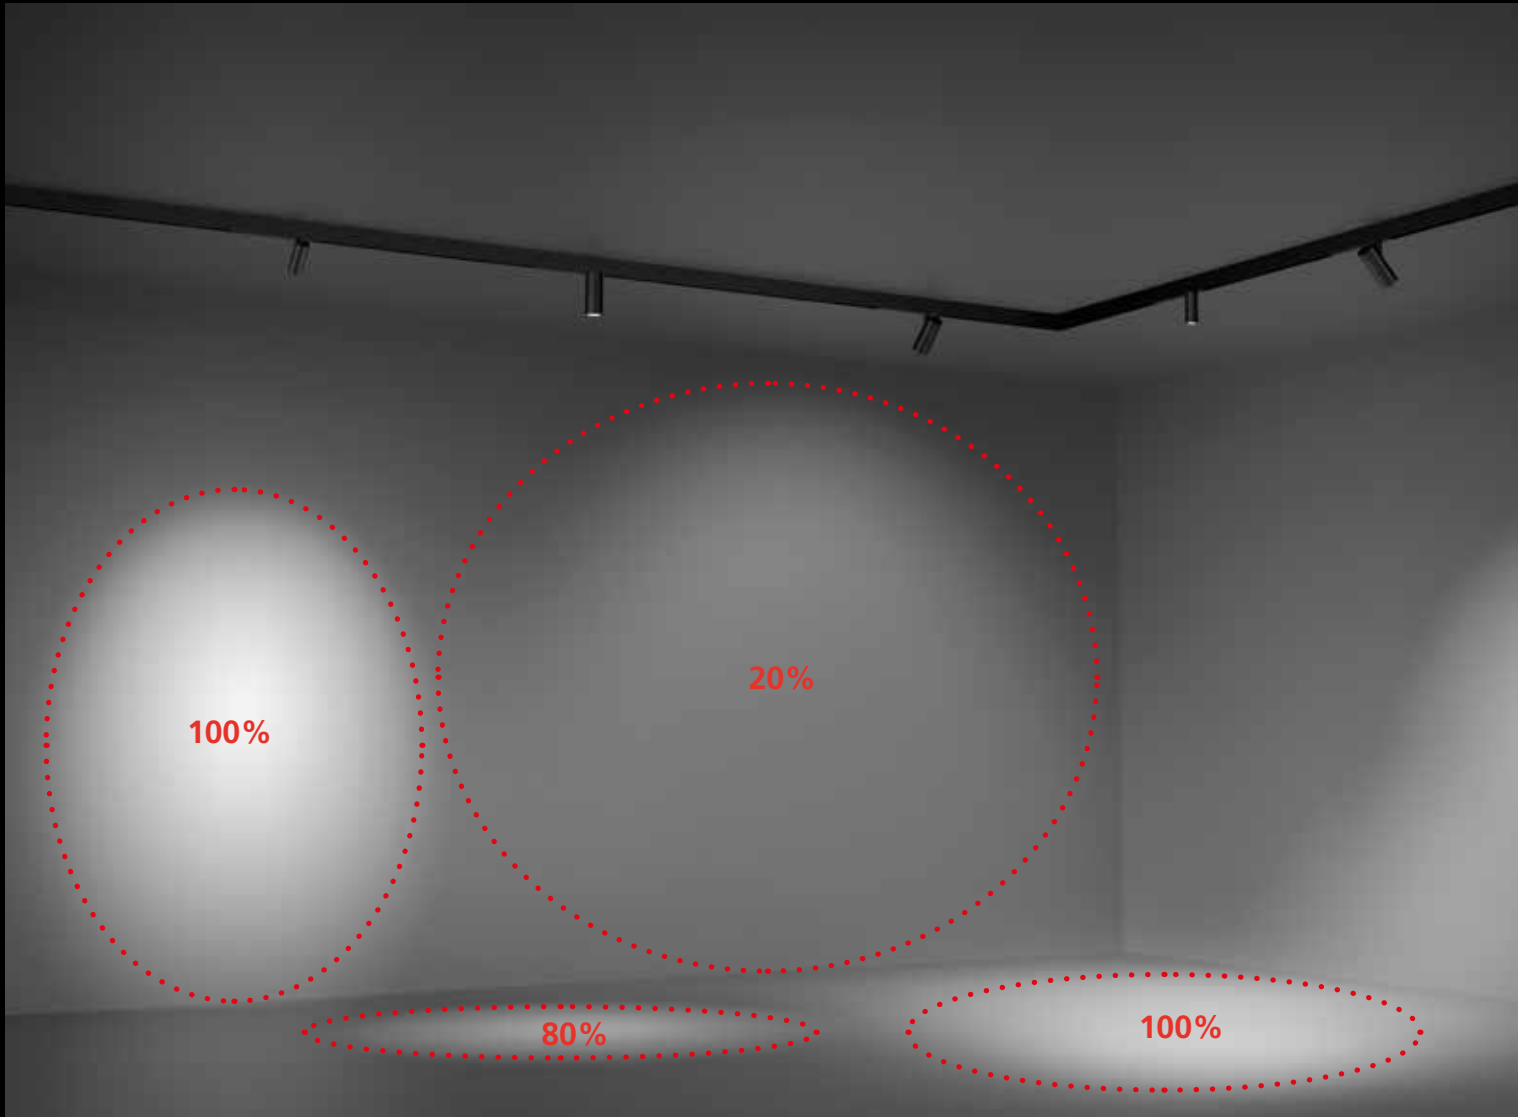

**Artemide
App**
Compatible




Vector is balanced

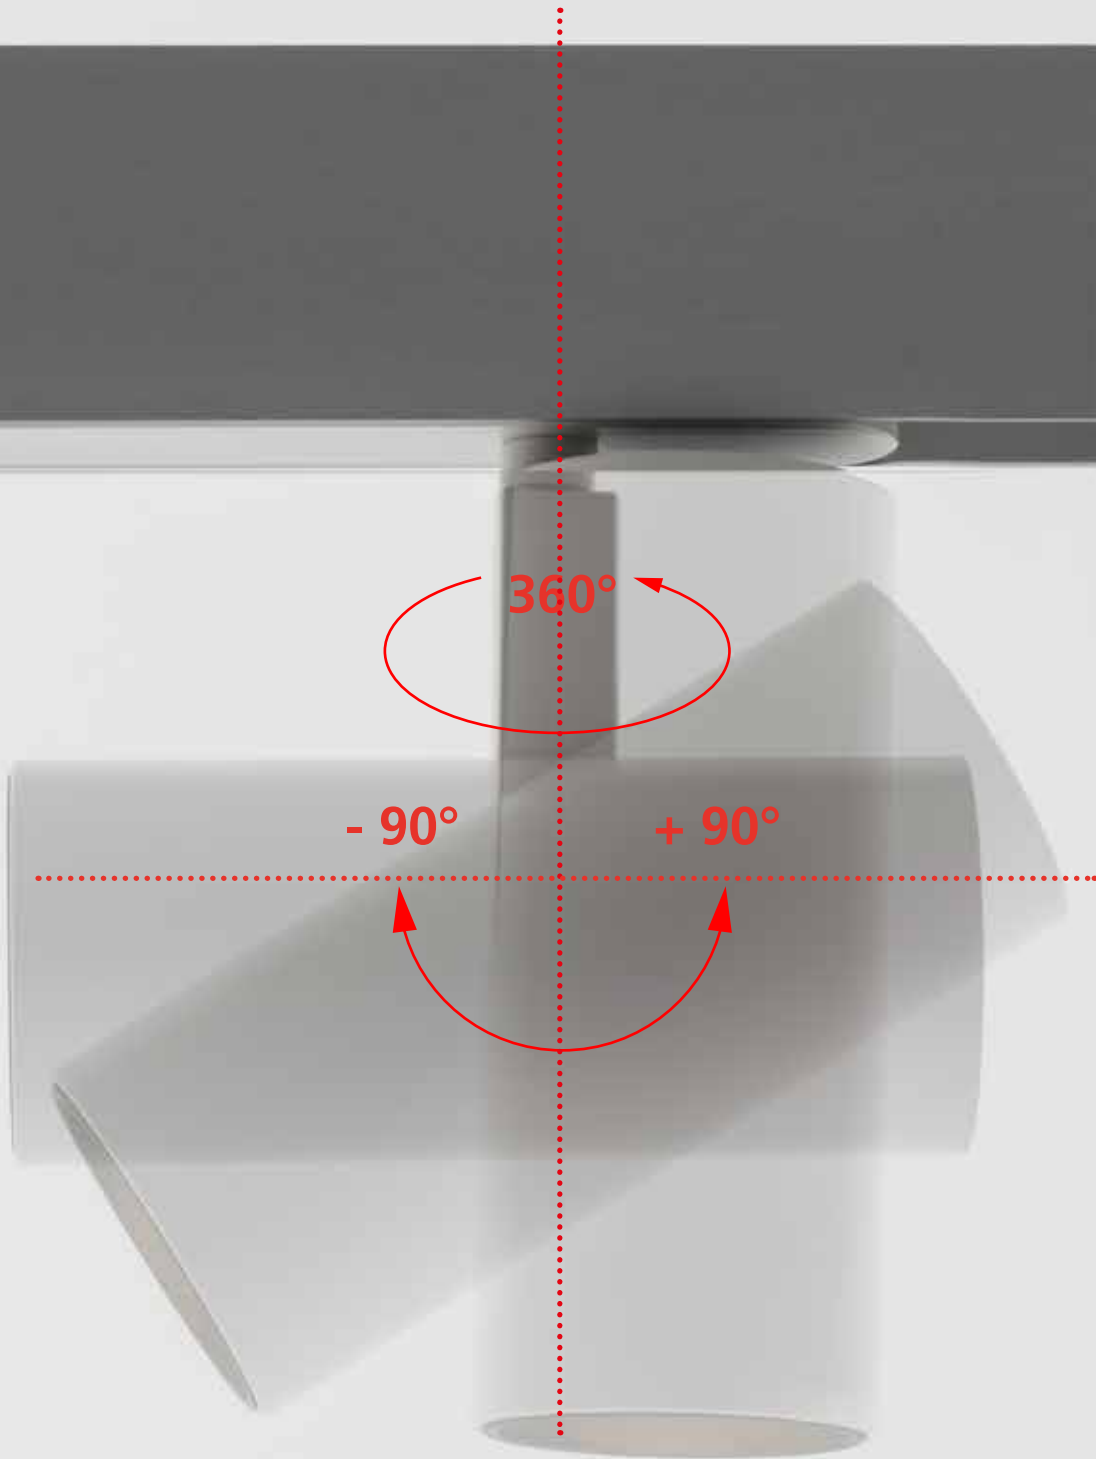

The junction arm is integrated with the spotlight body.
The center of balance is perfectly aligned with the track.
The pivoting of the body and the arm orientation are lockable.





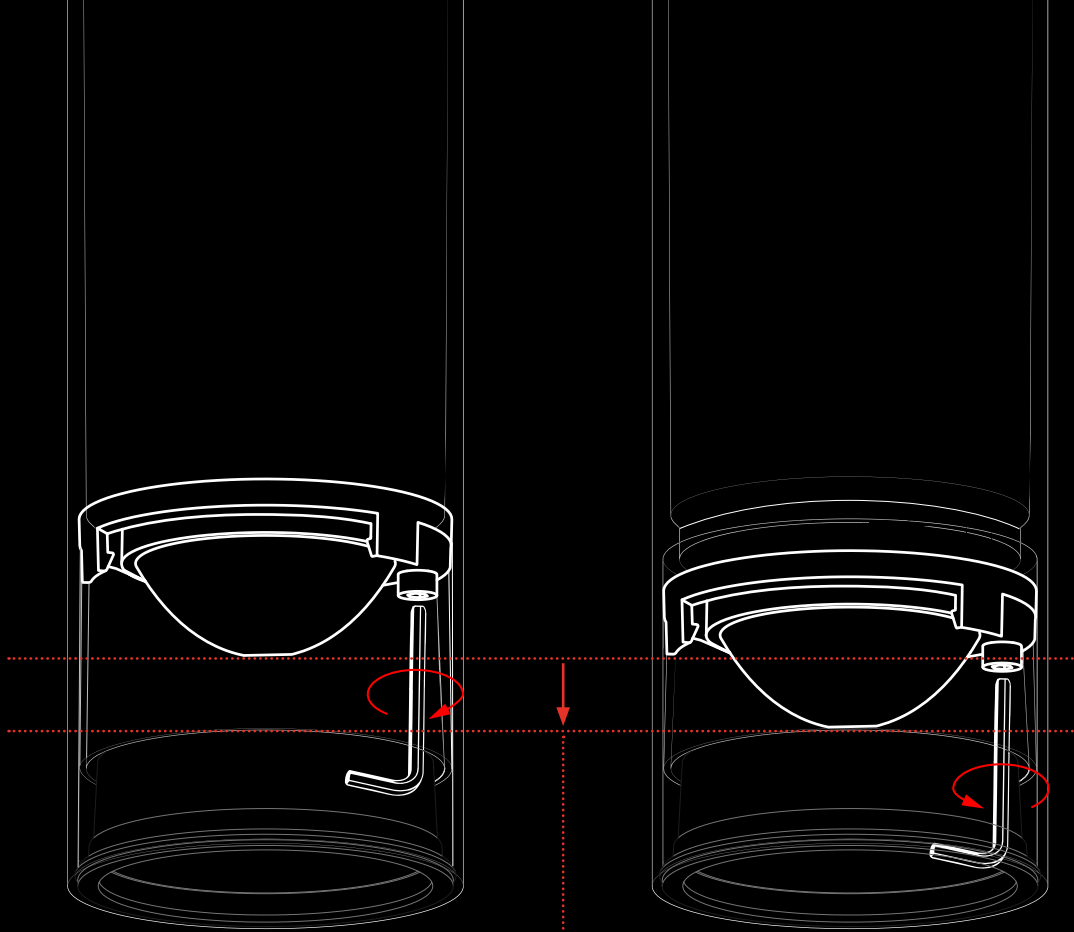

WF 32°
660 lm

F 22°
1137 lm

Vector
is zoom



ANTI-DAZZLE LOUVRE

Vector multiple accessories



ACCESSORIES HOLDER



ADJUSTABLE DOWSERS



SOFT FILTER

Vector track 230V



Vector 55 Zoom Track 230V





Vector track 230V


| | | | | | | | | |
|---------------|-----------|-------------------------|----------------|----------------|---|---|----|----------------------|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | S | F | WF | IP20 |
| | | | | | | | | |
| 01 | 04 | 15 | 18 | 20 | | | | MacAdam 3SDCM |
| Fast delivery | | Delivery time on demand | | | | | | Life L70 (6K) 50000h |

Vector 40 track 230V



| Track slim adapter | | | | |
|--------------------|-----|--------|--------|-------|
| W | CRI | Beam | Flux | CCT |
| 10 W | 90 | S 13° | 540 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | F 20° | 584 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | WF 28° | 528 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |

| Undimmable | | |
|---------------|----------|--------|
| Code | | € |
| AN011. | 01/04 | 210,00 |
| | 15/18/20 | 210,00 |
| AN001. | 01/04 | 210,00 |
| | 15/18/20 | 210,00 |
| AN051. | 01/04 | 210,00 |
| | 15/18/20 | 210,00 |
| AN012. | 01/04 | 210,00 |
| | 15/18/20 | 210,00 |
| AN002. | 01/04 | 210,00 |
| | 15/18/20 | 210,00 |
| AN052. | 01/04 | 210,00 |
| | 15/18/20 | 210,00 |
| AN013. | 01/04 | 210,00 |
| | 15/18/20 | 210,00 |
| AN003. | 01/04 | 210,00 |
| | 15/18/20 | 210,00 |
| AN053. | 01/04 | 210,00 |
| | 15/18/20 | 210,00 |

| Dimmable DALI | | |
|---------------|----------|--------|
| Code | | € |
| AN016. | 01/04 | 250,00 |
| | 15/18/20 | 250,00 |
| AN006. | 01/04 | 250,00 |
| | 15/18/20 | 250,00 |
| AN056. | 01/04 | 250,00 |
| | 15/18/20 | 250,00 |
| AN017. | 01/04 | 250,00 |
| | 15/18/20 | 250,00 |
| AN007. | 01/04 | 250,00 |
| | 15/18/20 | 250,00 |
| AN057. | 01/04 | 250,00 |
| | 15/18/20 | 250,00 |
| AN018. | 01/04 | 250,00 |
| | 15/18/20 | 250,00 |
| AN008. | 01/04 | 250,00 |
| | 15/18/20 | 250,00 |
| AN058. | 01/04 | 250,00 |
| | 15/18/20 | 250,00 |



Undimmable




Dimmable DALI

Vector 55 track 230V



| Track slim adapter | | | | |
|--------------------|-----|--------|---------|-------|
| W | CRI | Beam | Flux | CCT |
| 25 W | 90 | S 16° | 1492 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | F 22° | 1465 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | WF 32° | 1596 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |

| Undimmable | | |
|---------------|----------|--------|
| Code | | € |
| AN111. | 01/04 | 230,00 |
| | 15/18/20 | 230,00 |
| AN101. | 01/04 | 230,00 |
| | 15/18/20 | 230,00 |
| AN151. | 01/04 | 230,00 |
| | 15/18/20 | 230,00 |
| AN112. | 01/04 | 230,00 |
| | 15/18/20 | 230,00 |
| AN102. | 01/04 | 230,00 |
| | 15/18/20 | 230,00 |
| AN152. | 01/04 | 230,00 |
| | 15/18/20 | 230,00 |
| AN113. | 01/04 | 230,00 |
| | 15/18/20 | 230,00 |
| AN103. | 01/04 | 230,00 |
| | 15/18/20 | 230,00 |
| AN153. | 01/04 | 230,00 |
| | 15/18/20 | 230,00 |

| Dimmable DALI | | |
|---------------|----------|--------|
| Code | | € |
| AN116. | 01/04 | 285,00 |
| | 15/18/20 | 285,00 |
| AN106. | 01/04 | 285,00 |
| | 15/18/20 | 285,00 |
| AN156. | 01/04 | 285,00 |
| | 15/18/20 | 285,00 |
| AN117. | 01/04 | 285,00 |
| | 15/18/20 | 285,00 |
| AN107. | 01/04 | 285,00 |
| | 15/18/20 | 285,00 |
| AN157. | 01/04 | 285,00 |
| | 15/18/20 | 285,00 |
| AN118. | 01/04 | 285,00 |
| | 15/18/20 | 285,00 |
| AN108. | 01/04 | 285,00 |
| | 15/18/20 | 285,00 |
| AN158. | 01/04 | 285,00 |
| | 15/18/20 | 285,00 |



Undimmable



Dimmable DALI

Vector track 230V




Vector 55 zoom track 230V

Track slim adapter

| W | CRI | Beam | Flux | CCT |
|------|-----|--------------|---------------|-------|
| 23 W | 90 | F 22°-WF 32° | 1137 - 660 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |

Dimmable DALI

| Code | € |
|---------------------|--------|
| AN119. 01/04 | 310,00 |
| 15/18/20 | 310,00 |
| AN109. 01/04 | 310,00 |
| 15/18/20 | 310,00 |
| AN159. 01/04 | 310,00 |
| 15/18/20 | 310,00 |



Vector 95 track 230V

Track small adapter

| W | CRI | Beam | Flux | CCT |
|------|-----|--------|---------|-------|
| 35 W | 90 | S 16° | 3118 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | F 24° | 3122 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | WF 60° | 3119 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |

Undimmable


| Code | € |
|----------------------|--------|
| AN211. 01/04 | 280,00 |
| 15/18/20 | 280,00 |
| AN201. 01/04 | 280,00 |
| 15/18/20 | 280,00 |
| AN251. 01/04 | 280,00 |
| 15/18/20 | 280,00 |
| AN212. 01/04/ | 280,00 |
| 15/18/20 | 280,00 |
| AN202. 01/04 | 280,00 |
| 15/18/20 | 280,00 |
| AN252. 01/04 | 280,00 |
| 15/18/20 | 280,00 |
| AN213. 01/04 | 280,00 |
| 15/18/20 | 280,00 |
| AN203. 01/04 | 280,00 |
| 15/18/20 | 280,00 |
| AN253. 01/04 | 280,00 |
| 15/18/20 | 280,00 |

Dimmable DALI






| Code | € |
|---------------------|--------|
| AN216. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN206. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN256. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN217. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN207. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN257. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN218. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN208. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN258. 01/04 | 325,00 |
| 15/18/20 | 325,00 |

Dimmable DALI Eutrac






| Code | € |
|---------------------|--------|
| AN316. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN306. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN356. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN317. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN307. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN357. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN318. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN308. 01/04 | 325,00 |
| 15/18/20 | 325,00 |
| AN358. 01/04 | 325,00 |
| 15/18/20 | 325,00 |



Accessoires

| | Color | Vector 40 | Vector 55 | Vector 95 |
|---|------------------------------|----------------|----------------|----------------|
| | | Code | Code | Code |
| | | € | € | € |
|  | Accessories holder | AP90100 | AP91100 | AP92100 |
| | | 7,00 | 7,00 | 20,00 |
|  | Lens for elliptical emission | AP90200 | AP91200 | M282007 |
| | | 13,00 | 17,00 | 18,00 |
|  | Soft filter | AP90300 | AP91300 | M056807 |
| | | 10,00 | 14,00 | 18,00 |
|  | Anti-dazzle louvre | AP90400 | AP91400 | M282100 |
| | | 17,00 | 23,00 | 66,00 |
|  | Adjustable dowsers ● | | AP91500 | M059910 |
| | | | 21,00 | 60,00 |


Track 230V

| | | | | |
|---|---|---|---|---|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze |
|  |  |  |  |  |
| 01 | 04 | 15 | 18 | 20 |
| Fast delivery | | Delivery time on demand | | |







External three-circuit track

| Track |
|---------|
| Length |
| 1000 mm |
| 2000 mm |
| 3000 mm |
| 4000 mm |


| Code | | € |
|---------------|-------|--------|
| TK001. | 01/04 | 41,00 |
| TK002. | 01/04 | 78,00 |
| TK003. | 01/04 | 116,00 |
| TK004. | 01/04 | 155,00 |



Accessories

| | Code | € |
|--|---------------------|-------|
|  End cap | TK005. 01/04 | 5,00 |
|  Power supply end cap Earth conductor on the left. | TK006. 01/04 | 19,00 |
|  Power supply end cap Earth conductor on the right. | TK007. 01/04 | 19,00 |
|  Universal hook Maximum load 10 kg | TK200. 01/04 | 8,00 |
|  Kit suspension cables L. 1500 mm | TK20100 | 30,00 |
|  L. 3000 mm | TK20200 | 30,00 |
|  L. 5000 mm | TK20300 | 37,00 |
|  Stem kit L. 1000 mm | TK204. 01/04 | 33,00 |
|  Plastic cup for steel cable Ø 1,5 mm | TK20501 | 5,00 |
|  T bracket for suspension | TK20600 | 9,00 |
|  Universal adapter 6 conductors | TK207. 01/04 | 18,50 |
| 4 conductors | TK208. 01/04 | 16,00 |
| Accessory for ceiling installation | TK209. 01/04 | 41,00 |

Joint

| | Code | € |
|--|---------------------|-------|
|  Recessed joint | TK008. 01/04 | 15,00 |
|  Linear joint | TK009. 01/04 | 38,00 |
|  90° joint Internal earth conductor. | TK010. 01/04 | 38,00 |
|  90° joint External earth conductor. | TK011. 01/04 | 38,00 |
|  3-way joint Earth conductor on right. | TK012. 01/04 | 56,00 |
|  3-way joint Earth conductor on left. | TK013. 01/04 | 56,00 |
|  4-way joint | TK014. 01/04 | 71,00 |
|  Flexible joint | TK015. 01/04 | 52,00 |

White Black



01





04

Recessed three-circuit track

| Track |
|---------|
| Length |
| 2000 mm |
| 3000 mm |
| 4000 mm |

| Code | | € |
|--------------|-------|--------|
| TK102 | 01/04 | 102,00 |
| TK103 | 01/04 | 162,00 |
| TK104 | 01/04 | 226,00 |




Accessories



End cap

| Code | € |
|----------------|------|
| TK10501 | 5,00 |



Power supply end cap
Earth conductor
on the left.

| | | |
|---------------|-------|-------|
| TK108. | 01/04 | 26,50 |
|---------------|-------|-------|

Power supply end cap
Earth conductor
on the right.

| | | |
|---------------|-------|-------|
| TK107. | 01/04 | 26,50 |
|---------------|-------|-------|



Universal adapter
6 conductors
4 conductors

| | | |
|---------------|-------|-------|
| TK207. | 01/04 | 18,50 |
| TK208. | 01/04 | 16,00 |

Joint



Recessed joint

| Code | € |
|----------------|-------|
| TK10601 | 15,00 |

The system is a 3 phase mixed system with two additional conductors intended to manage a general data signal (for example dali, dmx, lon, eib, etc.).

The system is EN 60570 certified and its installation must be accomplished by highly qualified person.

There are four possible installation systems: directly on ceiling or on wall, using the needlepoints on the track, on ceiling or on wall using a metal clip, hanging by the suspension or recessed without exceeding the maximum loads.

Vector recessed





Vector recessed

| | | | | | | | | | |
|------------------------------|-------------|---|----------------------|----------------------|---|---|----|---|----------------------------------|
| White 01 Fast delivery | Black 04 | Brushed Silver 15 Delivery time on demand | Brushed Copper 18 | Brushed Bronze 20 | S | F | WF | MacAdam 3SDCM Life L70 (6K) 50000h Trimless recessed structure not included, order separately. Driver 700/500mA SELV supplied separately. | -90° 90° IP20 360° ø 86 mm |
|------------------------------|-------------|---|----------------------|----------------------|---|---|----|---|----------------------------------|



Vector 40 recessed



| W | CRI | Beam | Flux | CCT | Code | € |
|----------|--------------|--------------|----------|--------------|--------------|--------|
| 8 W | 90 | S 13° | 540 lm | 2700K | AP521. 01/04 | 195,00 |
| | | | | 3000K | 15/18/20 | 195,00 |
| | | | | 4000K | AP501. 01/04 | 195,00 |
| | | 15/18/20 | 195,00 | | | |
| | | F 20° | 584 lm | 2700K | AP551. 01/04 | 195,00 |
| | | | | 3000K | 15/18/20 | 195,00 |
| | 4000K | | | AP522. 01/04 | 195,00 | |
| | 15/18/20 | 195,00 | | | | |
| | WF 28° | 528 lm | 2700K | 2700K | AP502. 01/04 | 195,00 |
| | | | | 3000K | 15/18/20 | 195,00 |
| | | | | 4000K | AP552. 01/04 | 195,00 |
| | | | 15/18/20 | 195,00 | | |
| 3000K | | | 3000K | AP523. 01/04 | 195,00 | |
| | | | 4000K | 15/18/20 | 195,00 | |
| | 4000K | AP503. 01/04 | 195,00 | | | |
| 15/18/20 | 195,00 | | | | | |
| 4000K | AP553. 01/04 | 195,00 | | | | |
| 15/18/20 | 195,00 | | | | | |



Vector 55 recessed

| W | CRI | Beam | Flux | CCT | Code | € |
|----------|--------------|--------------|----------|--------------|--------------|--------|
| 17,5 W | 90 | S 16° | 1248 lm | 2700K | AP531. 01/04 | 195,00 |
| | | | | 3000K | 15/18/20 | 195,00 |
| | | | | 4000K | AP511. 01/04 | 195,00 |
| | | 15/18/20 | 195,00 | | | |
| | | F 22° | 1225 lm | 2700K | AP561. 01/04 | 195,00 |
| | | | | 3000K | 15/18/20 | 195,00 |
| | 4000K | | | AP532. 01/04 | 195,00 | |
| | 15/18/20 | 195,00 | | | | |
| | WF 32° | 1335 lm | 2700K | 2700K | AP512. 01/04 | 195,00 |
| | | | | 3000K | 15/18/20 | 195,00 |
| | | | | 4000K | AP562. 01/04 | 195,00 |
| | | | 15/18/20 | 195,00 | | |
| 3000K | | | 3000K | AP533. 01/04 | 195,00 | |
| | | | 4000K | 15/18/20 | 195,00 | |
| | 4000K | AP513. 01/04 | 195,00 | | | |
| 15/18/20 | 195,00 | | | | | |
| 4000K | AP563. 01/04 | 195,00 | | | | |
| 15/18/20 | 195,00 | | | | | |



| | |
|---|------------------------------|
|  | Trimless recessed structure |
|  | Optional trim frame Ø 108 |

| Vector 40 | | Vector 55 | |
|--------------|-------|--------------|-------|
| Code | € | Code | € |
| AP50000 | 55,00 | AP50000 | 55,00 |
| AP500. 01/04 | 38,00 | AP510. 01/04 | 38,00 |
| 15/18/20 | 38,00 | 15/18/20 | 38,00 |

| | Driver | Vac | L _{mm} | W _{mm} | H _{mm} | | Code | € |
|-----------|---------------|---------|-----------------|-----------------|-----------------|---------------|--------|-------|
| Vector 40 | 10 W 700mA | 220-240 | 75,3 | 39 | 22,2 | Undimmable | DV1020 | 21,00 |
| Vector 55 | 22 W 500mA | 220-240 | 125 | 38 | 23 | Undimmable | DV1021 | 26,00 |
| Vector 40 | 11-25 W 700mA | 220-240 | 164 | 38 | 24,5 | Dimmable DALI | DV1023 | 46,00 |
| Vector 55 | 11-25 W 500mA | 220-240 | 164 | 38 | 24,5 | Dimmable DALI | DV1024 | 46,00 |

Vector semirecessed




Vector semirecessed

| | | | | | | | | | |
|------------------------------|-------------|---|----------------------|----------------------|---|---|----|---|----------------------------------|
| White 01 Fast delivery | Black 04 | Brushed Silver 15 Delivery time on demand | Brushed Copper 18 | Brushed Bronze 20 | S | F | WF | MacAdam 3SDCM Life L70 (6K) 50000h Trimless recessed structure not included, order separately. Driver 700/500mA SELV supplied separately. | -90° 90° IP20 360° ø 86 mm |
|------------------------------|-------------|---|----------------------|----------------------|---|---|----|---|----------------------------------|


Vector 40 semirecessed

| W | CRI | Beam | Flux | CCT | Code | € | |
|--------|--------|-------|--------|--------------|--------------|--------------|--------|
| 8 W | 90 | S 13° | 540 lm | 2700K | AP621. 01/04 | 150,00 | |
| | | | | | 15/18/20 | 150,00 | |
| | | | | 3000K | AP601. 01/04 | 150,00 | |
| | | | | | 15/18/20 | 150,00 | |
| | | | | 4000K | AP651. 01/04 | 150,00 | |
| | | | | | 15/18/20 | 150,00 | |
| | | F 20° | 584 lm | 2700K | 2700K | AP622. 01/04 | 150,00 |
| | | | | | | 15/18/20 | 150,00 |
| | | | | | 3000K | AP602. 01/04 | 150,00 |
| | | | | | | 15/18/20 | 150,00 |
| | | | | | 4000K | AP652. 01/04 | 150,00 |
| | | | | | | 15/18/20 | 150,00 |
| WF 28° | 528 lm | 2700K | 2700K | AP623. 01/04 | 150,00 | | |
| | | | | 15/18/20 | 150,00 | | |
| | | | 3000K | AP603. 01/04 | 150,00 | | |
| | | | | 15/18/20 | 150,00 | | |
| | | | 4000K | AP653. 01/04 | 150,00 | | |
| | | | | 15/18/20 | 150,00 | | |



Vector 55 semirecessed

| W | CRI | Beam | Flux | CCT | Code | € | |
|--------|-----|--------|---------|-------|--------------|--------------|--------|
| 17,5 W | 90 | S 16° | 1248 lm | 2700K | AP631. 01/04 | 164,00 | |
| | | | | | 15/18/20 | 164,00 | |
| | | | | 3000K | AP611. 01/04 | 164,00 | |
| | | | | | 15/18/20 | 164,00 | |
| | | | | 4000K | AP661. 01/04 | 164,00 | |
| | | | | | 15/18/20 | 164,00 | |
| | | F 22° | 1225 lm | 2700K | 2700K | AP632. 01/04 | 164,00 |
| | | | | | | 15/18/20 | 164,00 |
| | | | | | 3000K | AP612. 01/04 | 164,00 |
| | | | | | | 15/18/20 | 164,00 |
| | | | | | 4000K | AP662. 01/04 | 164,00 |
| | | | | | | 15/18/20 | 164,00 |
| | | WF 32° | 1335 lm | 2700K | 2700K | AP633. 01/04 | 164,00 |
| | | | | | | 15/18/20 | 164,00 |
| | | | | | 3000K | AP613. 01/04 | 164,00 |
| | | | | | | 15/18/20 | 164,00 |
| | | | | | 4000K | AP663. 01/04 | 164,00 |
| | | | | | | 15/18/20 | 164,00 |



| | Driver | Vac | L _{mm} | W _{mm} | H _{mm} | | Code | € |
|-----------|---------------|---------|-----------------|-----------------|-----------------|---------------|--------|-------|
| Vector 40 | 10 W 700mA | 220-240 | 75,3 | 39 | 22,2 | Undimmable | DV1020 | 21,00 |
| Vector 55 | 11-32 W 600mA | 220-240 | 130 | 42 | 30 | Undimmable | DV1022 | 34,00 |
| Vector 40 | 11-25 W 700mA | 220-240 | 164 | 38 | 24,5 | Dimmable DALI | DV1023 | 46,00 |
| Vector 55 | 11-25 W 500mA | 220-240 | 164 | 38 | 24,5 | Dimmable DALI | DV1024 | 46,00 |



Vector magnetic




Vector magnetic 48V dc

| | | | | | | | | |
|---------------|-----------|-------------------------|----------------|----------------|---|---|----|----------------------|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | S | F | WF | IP20 |
| | | | | | | | | |
| 01 | 04 | 15 | 18 | 20 | | | | MacAdam 3SDCM |
| Fast delivery | | Delivery time on demand | | | | | | Life L70 (6K) 50000h |


Vector 40 magnetic

| W | CRI | Beam | Flux | CCT | Dimmable DALI | Code | € | | |
|------|-----|--------|---------------|----------|---------------|----------|---------------|----------|--------|
| 10 W | 90 | S 13° | 540 lm | 2700K | AP011. | 01/04 | 210,00 | | |
| | | | | 3000K | | 15/18/20 | 210,00 | | |
| | | | | 4000K | AP001. | 01/04 | 210,00 | | |
| | | | | | | 15/18/20 | 210,00 | | |
| | | | | F 20° | 584 lm | 2700K | AP051. | 01/04 | 210,00 |
| | | | | | | 3000K | | 15/18/20 | 210,00 |
| | | 4000K | AP012. | | | 01/04 | 210,00 | | |
| | | | | | | 15/18/20 | 210,00 | | |
| | | WF 28° | 528 lm | | | 2700K | AP002. | 01/04 | 210,00 |
| | | | | | | 3000K | | 15/18/20 | 210,00 |
| | | | | 4000K | AP052. | 01/04 | 210,00 | | |
| | | | | | | 15/18/20 | 210,00 | | |
| | | | | 2700K | AP013. | 01/04 | 210,00 | | |
| | | | | 3000K | | 15/18/20 | 210,00 | | |
| | | 4000K | AP003. | 01/04 | 210,00 | | | | |
| | | | | 15/18/20 | 210,00 | | | | |
| | | | | 4000K | AP053. | 01/04 | 210,00 | | |
| | | | | | | 15/18/20 | 210,00 | | |



Vector 55 magnetic

| W | CRI | Beam | Flux | CCT | Dimmable DALI | Code | € | | |
|------|-----|--------|---------------|----------|---------------|----------|---------------|----------|--------|
| 26 W | 90 | S 16° | 1492 lm | 2700K | AP111. | 01/04 | 280,00 | | |
| | | | | 3000K | | 15/18/20 | 280,00 | | |
| | | | | 4000K | AP101. | 01/04 | 280,00 | | |
| | | | | | | 15/18/20 | 280,00 | | |
| | | | | F 22° | 1465 lm | 2700K | AP151. | 01/04 | 280,00 |
| | | | | | | 3000K | | 15/18/20 | 280,00 |
| | | 4000K | AP112. | | | 01/04 | 280,00 | | |
| | | | | | | 15/18/20 | 280,00 | | |
| | | WF 32° | 1596 lm | | | 2700K | AP102. | 01/04 | 280,00 |
| | | | | | | 3000K | | 15/18/20 | 280,00 |
| | | | | 4000K | AP152. | 01/04 | 280,00 | | |
| | | | | | | 15/18/20 | 280,00 | | |
| | | | | 2700K | AP113. | 01/04 | 280,00 | | |
| | | | | 3000K | | 15/18/20 | 280,00 | | |
| | | 4000K | AP103. | 01/04 | 280,00 | | | | |
| | | | | 15/18/20 | 280,00 | | | | |
| | | | | 4000K | AP153. | 01/04 | 280,00 | | |
| | | | | | | 15/18/20 | 280,00 | | |




| Accessoires | | Color | Vector 40 | Vector 55 |
|-------------|------------------------------|-------|----------------|----------------|
| | | | Code | Code |
| | Accessories holder | | AP90100 | AP91100 |
| | | | 7,00 | 7,00 |
| | Lens for elliptical emission | | AP90200 | AP91200 |
| | | | 13,00 | 17,00 |
| | Soft filter | | AP90300 | AP91300 |
| | | | 10,00 | 14,00 |
| | Anti-dazzle louvre | | AP90400 | AP91400 |
| | | | 17,00 | 23,00 |
| | Adjustable dowsers | ● | | AP91500 |
| | | | | 21,00 |



Vector 55 zoom magnetic

| W | CRI | Beam | Flux | CCT |
|------|-----|--------------|---------------|-------|
| 23 W | 90 | F 22°-WF 32° | 1137 - 660 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |


| Dimmable DALI | | |
|---------------|----------|--------|
| Code | | € |
| AN119. | 01/04 | 345,00 |
| | 15/18/20 | 345,00 |
| AN109. | 01/04 | 345,00 |
| | 15/18/20 | 345,00 |
| AN159. | 01/04 | 345,00 |
| | 15/18/20 | 345,00 |



Vector 40 pendant magnetic

| W | CRI | Beam | Flux | CCT |
|------|-----|--------|--------|-------|
| 10 W | 90 | S 13° | 540 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | F 20° | 584 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | WF 28° | 528 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |


| Dimmable DALI | | |
|---------------|----------|--------|
| Code | | € |
| AP211. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP201. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP251. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP212. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP202. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP252. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP213. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP203. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP253. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |



Vector 55 magnetic

| W | CRI | Beam | Flux | CCT |
|------|-----|--------|---------|-------|
| 26 W | 90 | S 16° | 1492 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | F 22° | 1465 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | WF 32° | 1596 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |

| Dimmable DALI | | |
|---------------|------------|--------|
| Code | | € |
| AP311. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP301. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP351. | 01/0401/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP312. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP302. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP352. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP313. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP303. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP353. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |





For further information on A.24
visit artemide.com

A.24

is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and flexibility. It is a fluid system that harbours a patented optoelectronic technology.

A.24 is a fluid system


Carlotta de Bevilacqua
2017

PATENT PENDING FOR OPTICS ENGINEERING



A.24

system typologies



90° ANGLE MAGNETIC
301 x 301 mm



90° ANGLE DIFFUSED
301 x 301 mm



90° ANGLE SHARPING
301 x 301 mm

LINEAR MAGNETIC TRACK

1176 - 2352 mm



LINEAR DIFFUSED

1176 - 2352 mm



LINEAR SHARPING

1176 - 2352 mm



CIRCULAR DIFFUSED

RADIUS 561 mm (60° - 90°)

RADIUS 750 mm (45° - 90°)

CIRCULAR SHARPING

RADIUS 561 mm (60° - 90°)

RADIUS 750 mm (45° - 90°)

CIRCULAR MAGNETIC

RADIUS 561 mm (60° - 90°)

RADIUS 750 mm (45° - 90°)



A.24

stand-alone typologies

LINEAR MAGNETIC TRACK

1176 - 2352 mm



LINEAR DIFFUSED

1176 - 2352 mm



LINEAR SHARPING

1176 - 2352 mm





CIRCULAR SHARPING

Ø 1122 mm

Ø 1550 mm

CIRCULAR DIFFUSED

Ø 1122 mm


Ø 1550 mm

A.24 / Vector colors

White



01

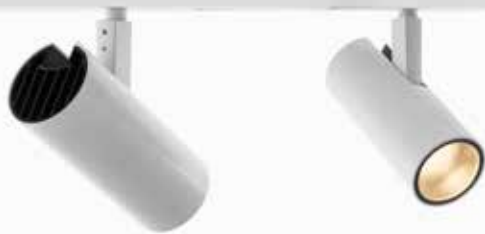

Black



04



Fast delivery

Brushed
Bronze



20



Brushed
Copper



18



Brushed
Silver



15



Delivery time on demand

A.24 color temperatures



Fast delivery

2700K



4000K




Delivery time on demand

ADDRESS
1


A.24 is fully addressable

Each module and spot can be managed separately by Artemide App or by DALI control up to 64 IP Address

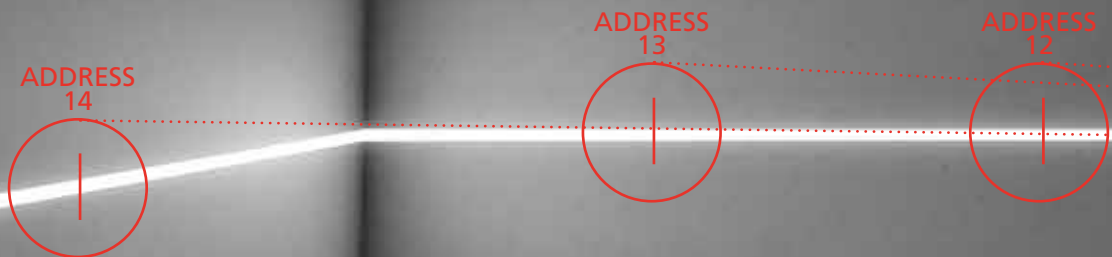

Artemide
App
Compatible



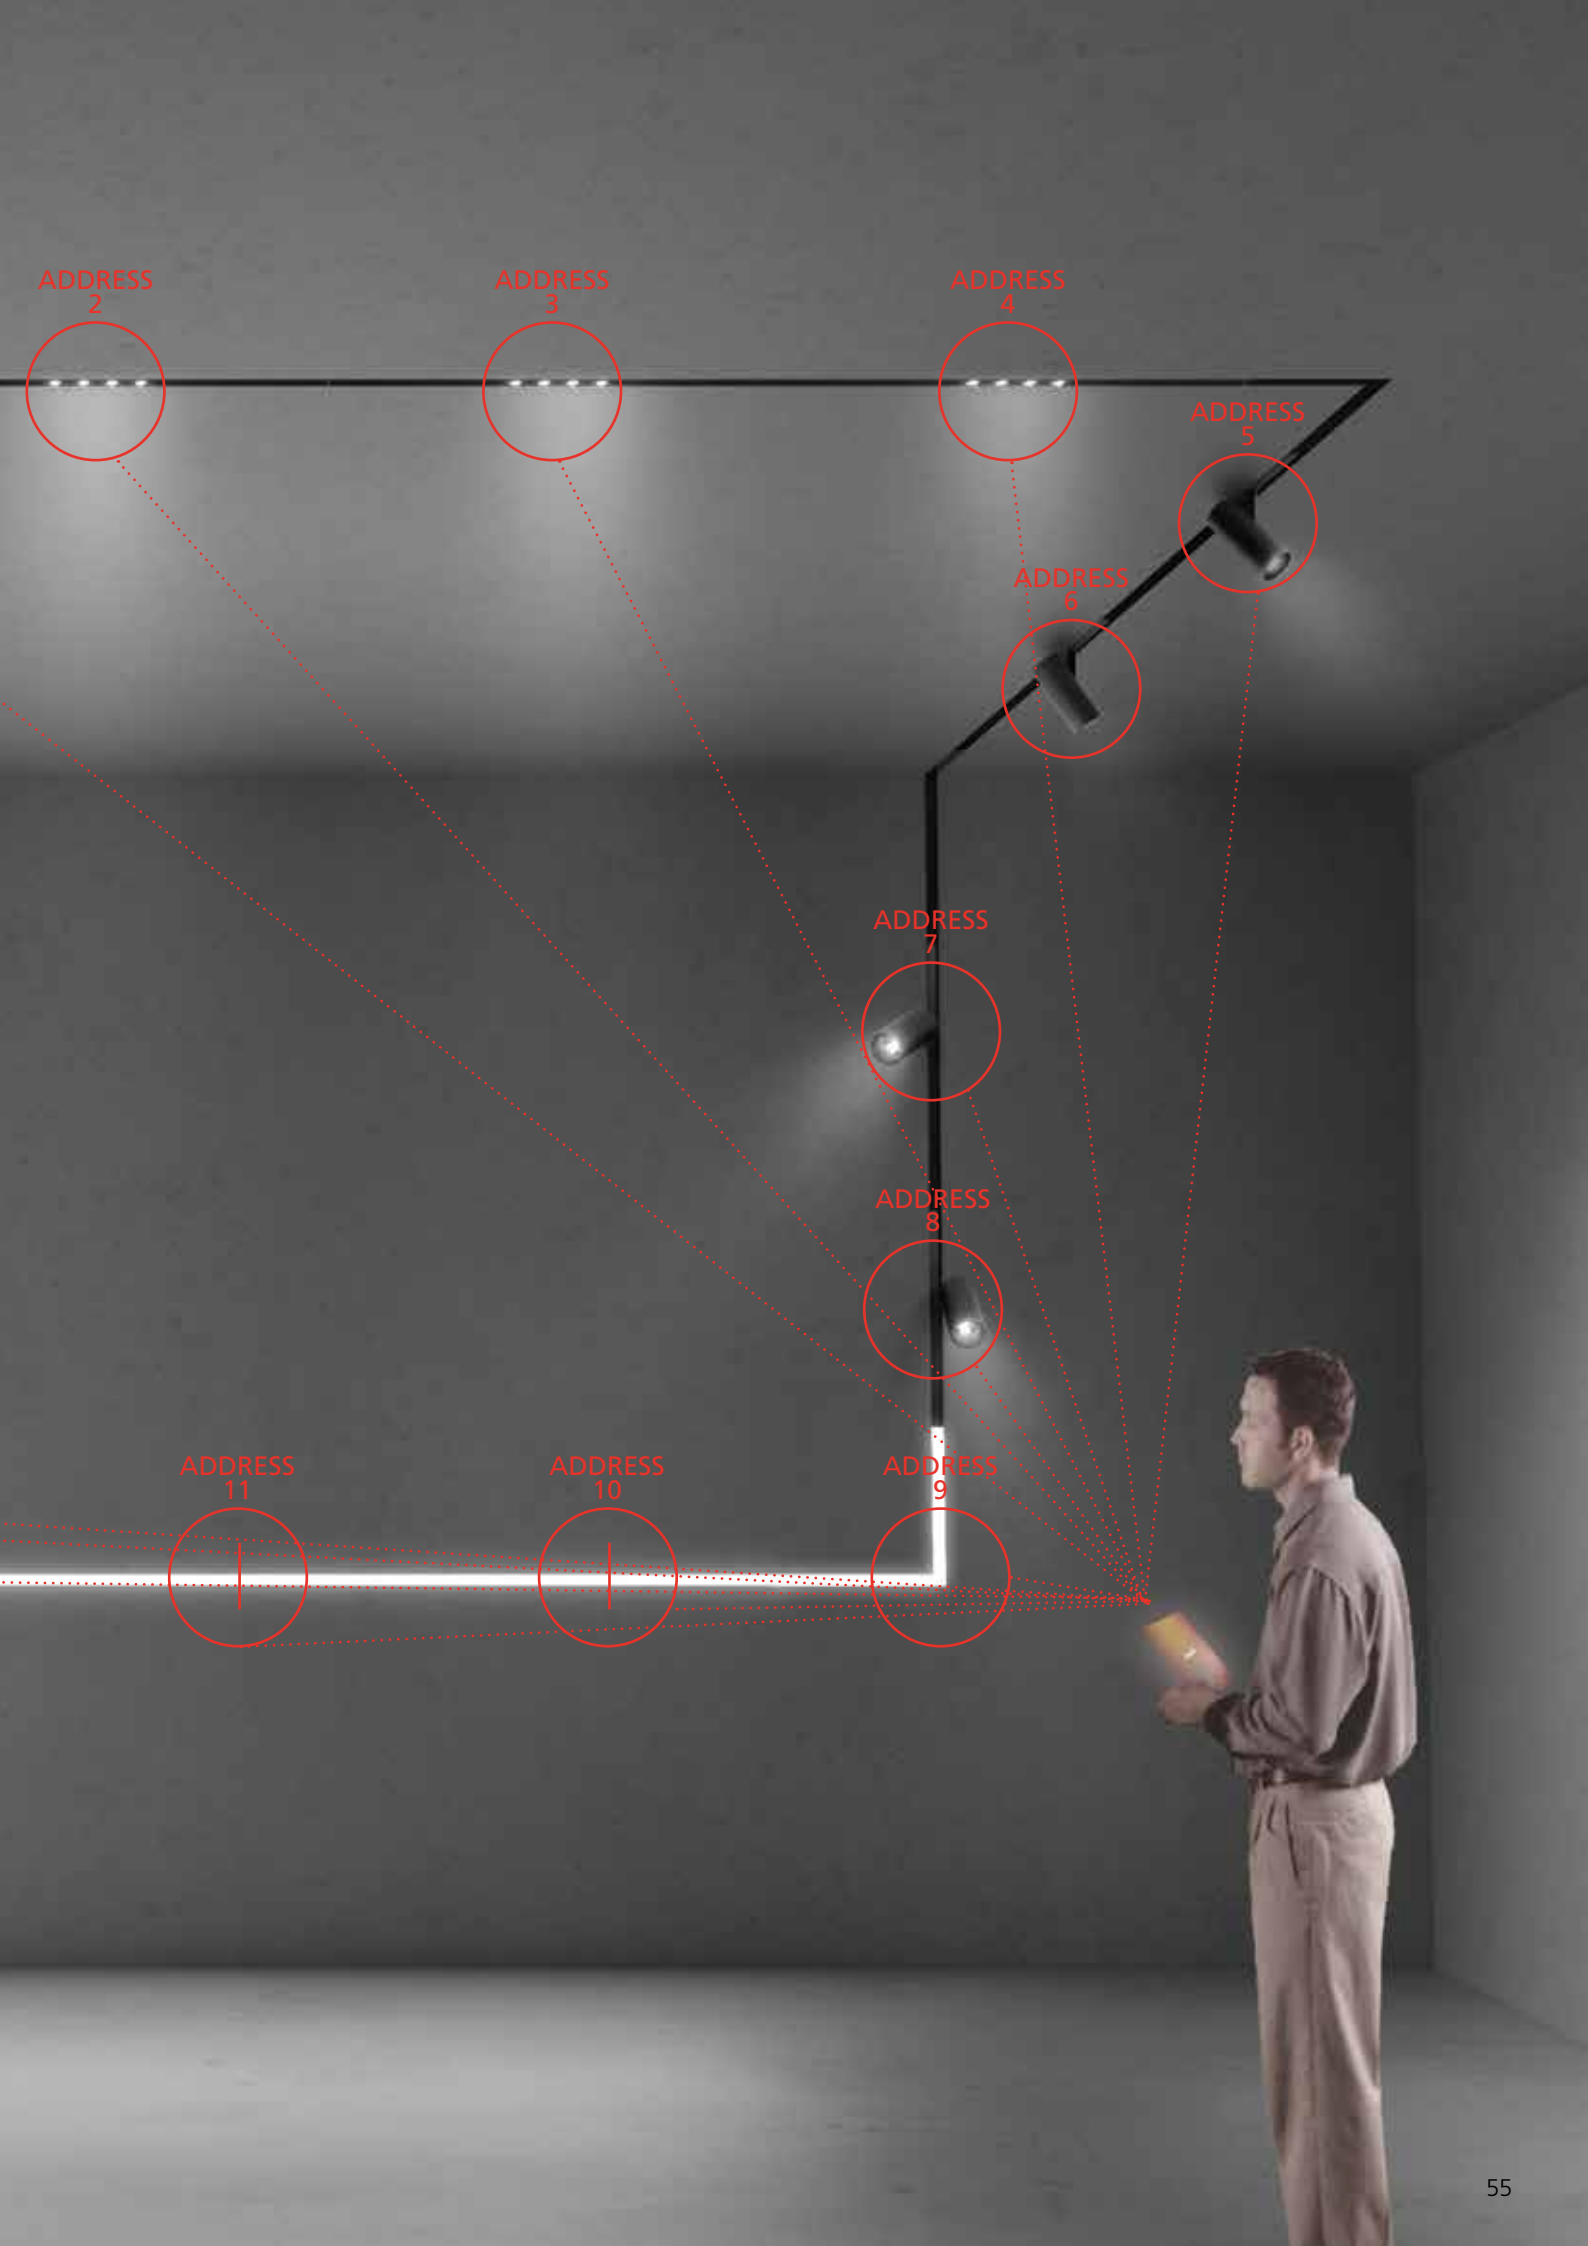

ADDRESS
2

ADDRESS
3

ADDRESS
4

ADDRESS
5

ADDRESS
6

ADDRESS
7

ADDRESS
8

ADDRESS
11

ADDRESS
10

ADDRESS
9

MacAdam 2SDC
CRI=80
CCT: 2700K / 3000K / 4000K





16W 1124 lm 33W 3049 lm

10 W
MacAdam 3SDC
CRI=90
CCT: 2700K / 3 000K / 4000K




S 13° 540 lm F 20° 584 lm WF 28° 528 lm

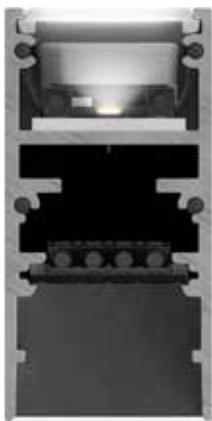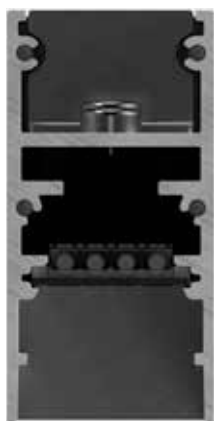

A.24 Magnetic

26 W
 MacAdam 3SDC
 CRI=90
 CCT: 2700K / 3000K / 4000K




S 16°
1492 lm

F 22°
1465 lm

WF 32°
1596 lm

23 W
 MacAdam 3SDC
 CRI=90
 CCT: 2700K / 3000K / 4000K



S 22° → WF 32°
1492 lm 1596 lm

Vector 55



Vector 55 zoom



A.24 Magnetic is ArtemideSELV

a unique feature developed for a real
safe DALI interface.




D.art® is a technology patented by Artemide that overcomes the safety limits of the Dali signal in devices where the same signal is accessible to the touch.

The Dali signal is transformed to an "SELV" voltage ensuring the total safety of the appliance.

A.24 has been designed in compliance with international certifications.







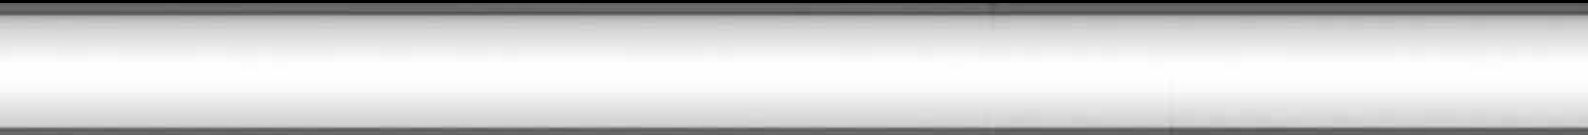

MacAdam 2SDC
CRI=80
CCT: 2700 / 3000K / 4000K



16W 33W
1124 lm 3049 lm

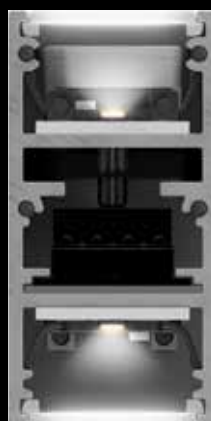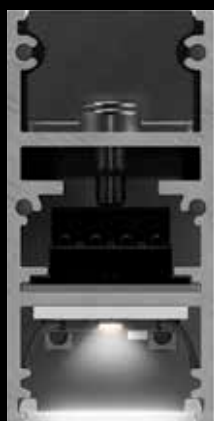

MacAdam 2SDC
CRI=80
CCT: 2700 / 3000K / 4000K



33W 66W
2884 lm 5769 lm



A.24 Diffused



MacAdam 2SDC
 CRI=80
 CCT: 2700 / 3000K / 4000K



| | |
|---------|---------|
| 16W | 33W |
| 1124 lm | 3049 lm |

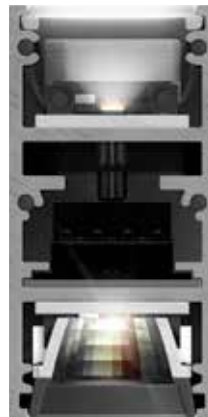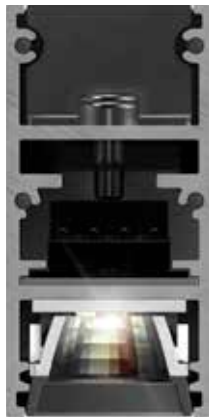

MacAdam 2SDC
 CRI=90
 CCT: 2700 / 3000K / 4000K



| | | | |
|---------|---------|---------|---------|
| 25W | 25W | 50W | 50W |
| S 24° | XF 62° | S 24° | XF 62° |
| 1678 lm | 1555 lm | 3356 lm | 3111 lm |

A.24 Sharping

A.24 is powered by 48 Vdc

**It permits long runs
in a small size 27x54 mm**





MAGNETIC

Vector 40

max 12 with 1 Power Supply 150W - effective 125W

max 21 with 1 Power Supply 240W - effective 210W

Vector 55

max 4 with 1 Power Supply 150W - effective 125W

max 8 with 1 Power Supply 240W - effective 210W



DIFFUSED

Direct

max 4m with 1 Power Supply 150W - effective 125W

max 7m with 1 Power Supply 240W - effective 210W

Direct-indirect

max 2m with 1 Power Supply 150W - effective 125W

max 4m with 1 Power Supply 240W - effective 210W



SHARPING

Direct

max 5m with 1 Power Supply 150W - effective 125W

max 9m with 1 Power Supply 240W - effective 210W

Direct-indirect

max 3m with 1 Power Supply 150W - effective 125W

max 5m with 1 Power Supply 240W - effective 210W

RECESSED

SURFACE MOUNTED



A.24 space fittings


SUSPENSION





SUSPENSION WITH INDIRECT EMISSION



A.24 magnetic is balanced

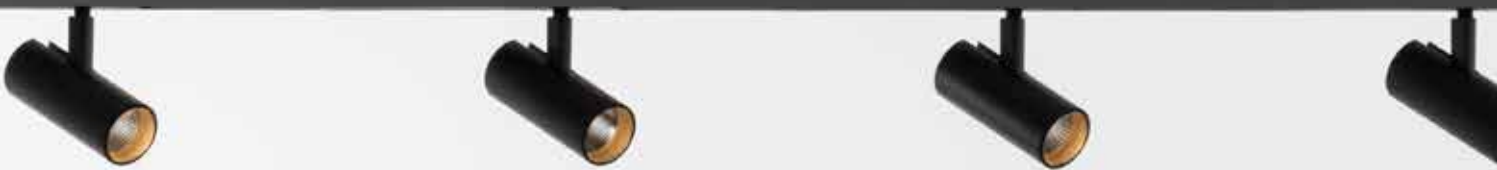

No track's rotation when the spotlights are tilted in the same direction.
Suspension cable no stiff stems.

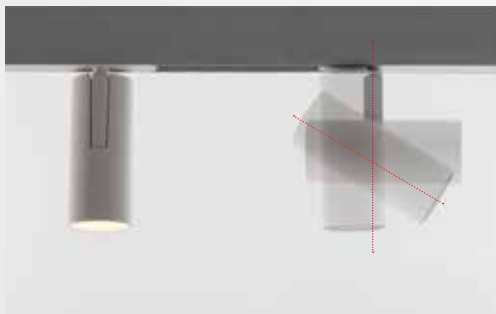
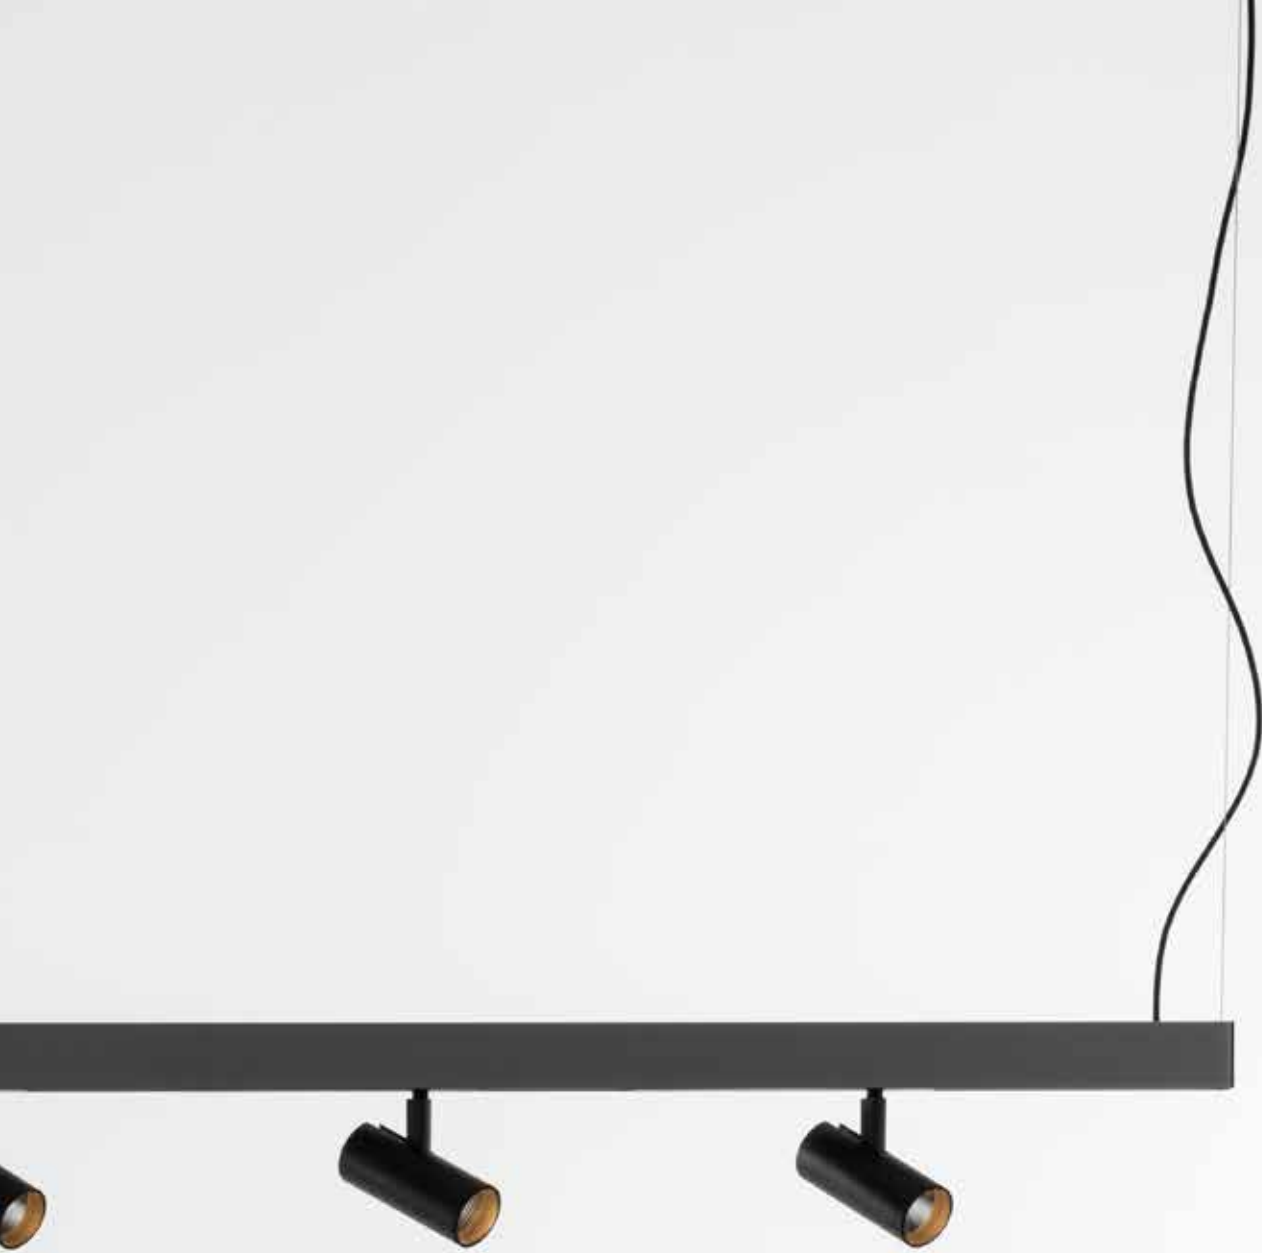


The junction arm is integrated with the spotlight body.



The center of balance is perfectly aligned with the track.

The pivoting and arm orientation are lockable.

A.24/ Vector infinite possibilities

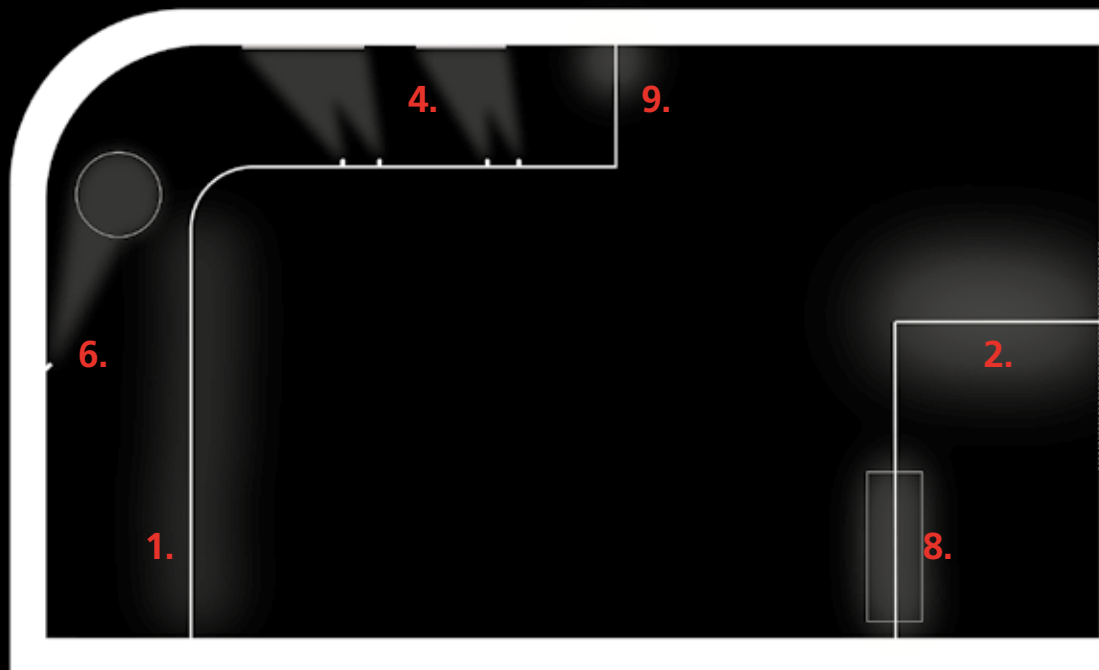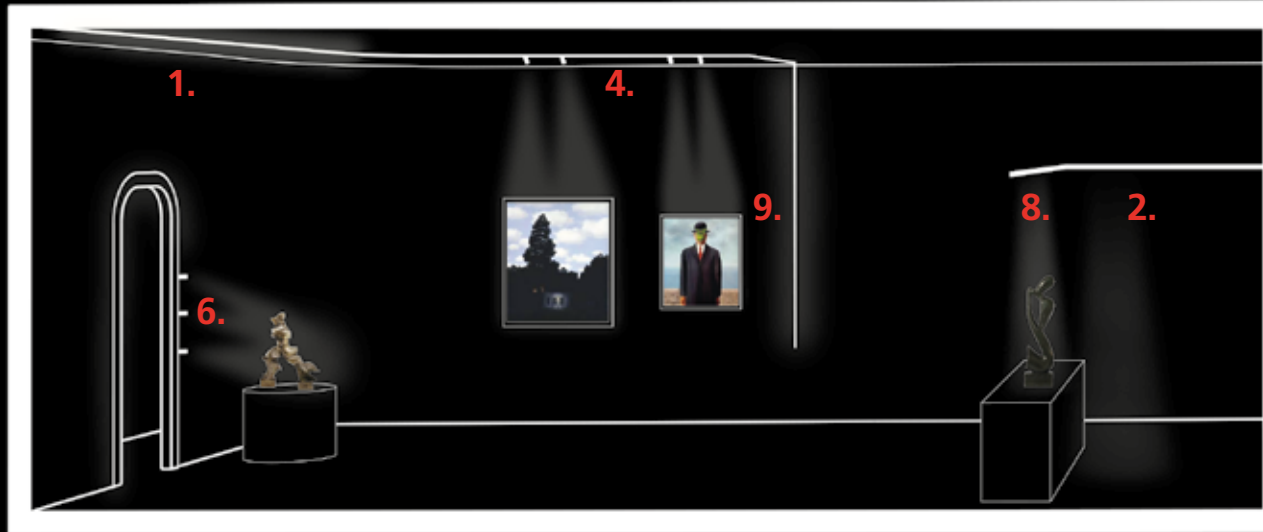

- 1. A.24 Recessed diffused emission
- 2. A.24 Suspension diffused emission
- 4. Vector 55 magnetic
- 3. A.24 Suspension indirect diffused emission
- 5. Vector 55 zoom magnetic
- 6. Vector 40 magnetic
- 7. A.24 Suspension sharpening emission 64°
- 8. A.24 Suspension sharpening emission 24°
- 9. A24 Ceiling - wall diffused emission
- 10. Vector 40 /Unterlinden magnetic pendent

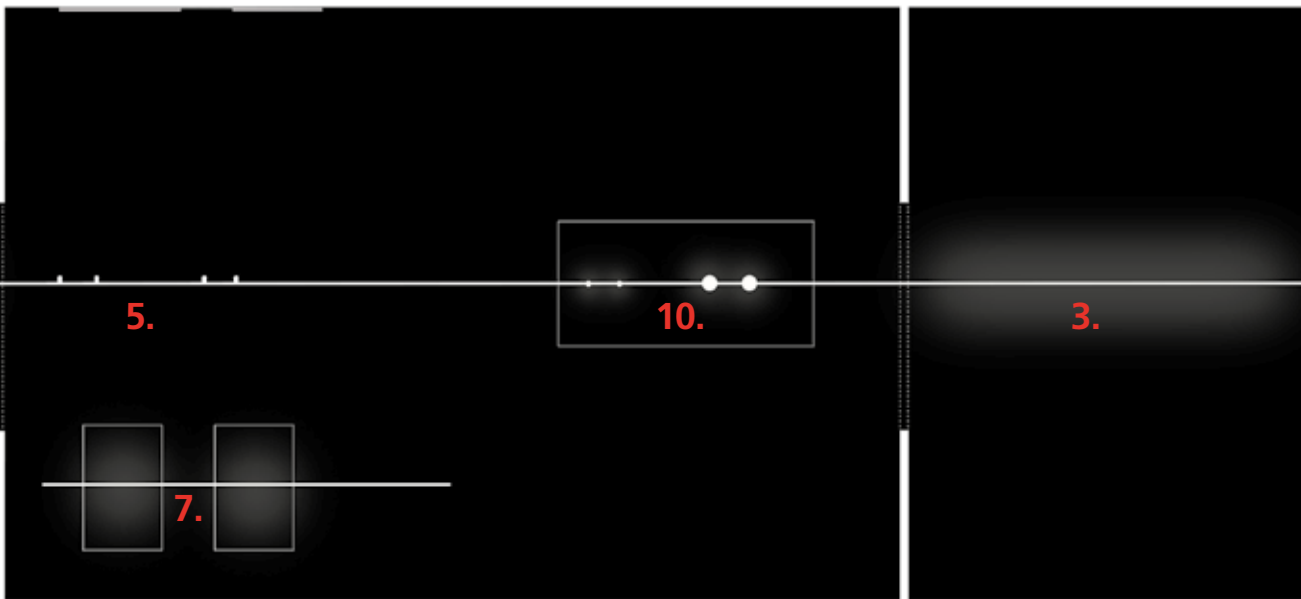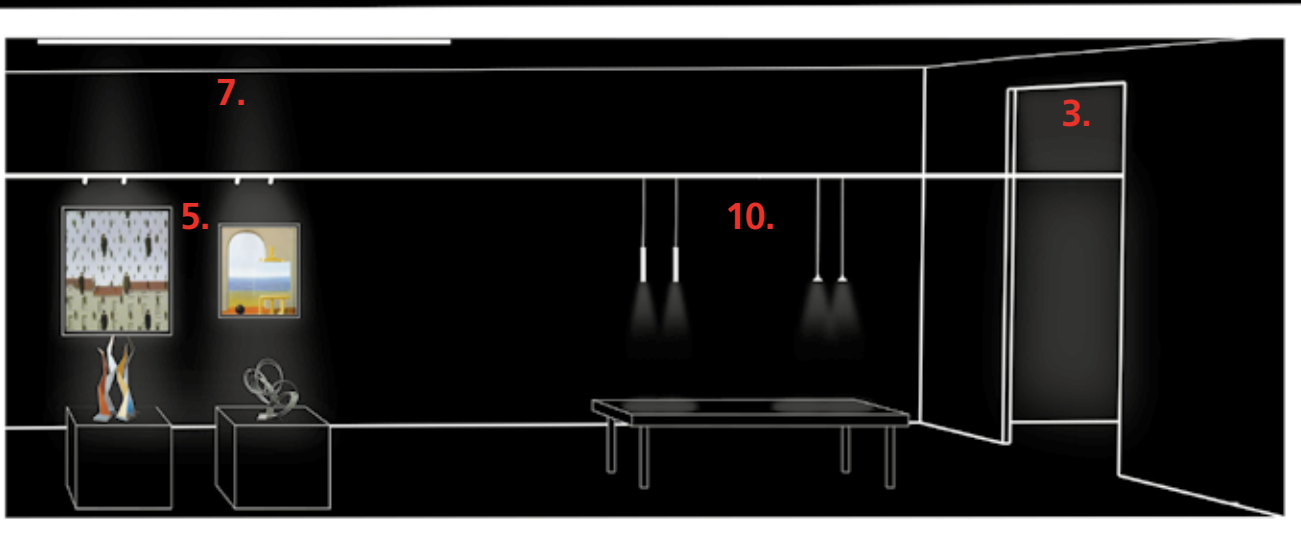

A.24

pre-configurated modules



Each module (magnetic track, diffusing, sharpening) is pre-configurated and it is provided with:

1. the specific optical engine (magnetic, diffusing, sharpening).
2. the mechanical and electrical joints to combine for a continuous run.
3. each suspension module is equipped with a suspension cable.
4. each ceiling module is equipped with 1 ceiling bracket for 1176 mm length or with 2 ceiling brackets for 2352 mm length.



Suspension cable



Mechanical Connection

Ceiling bracket



Electrical Connection


A.24 tips to order



Feeding cables can be located everywhere, including corners. Track angled elements can independently feed each arms.

MAGNETIC TRACK



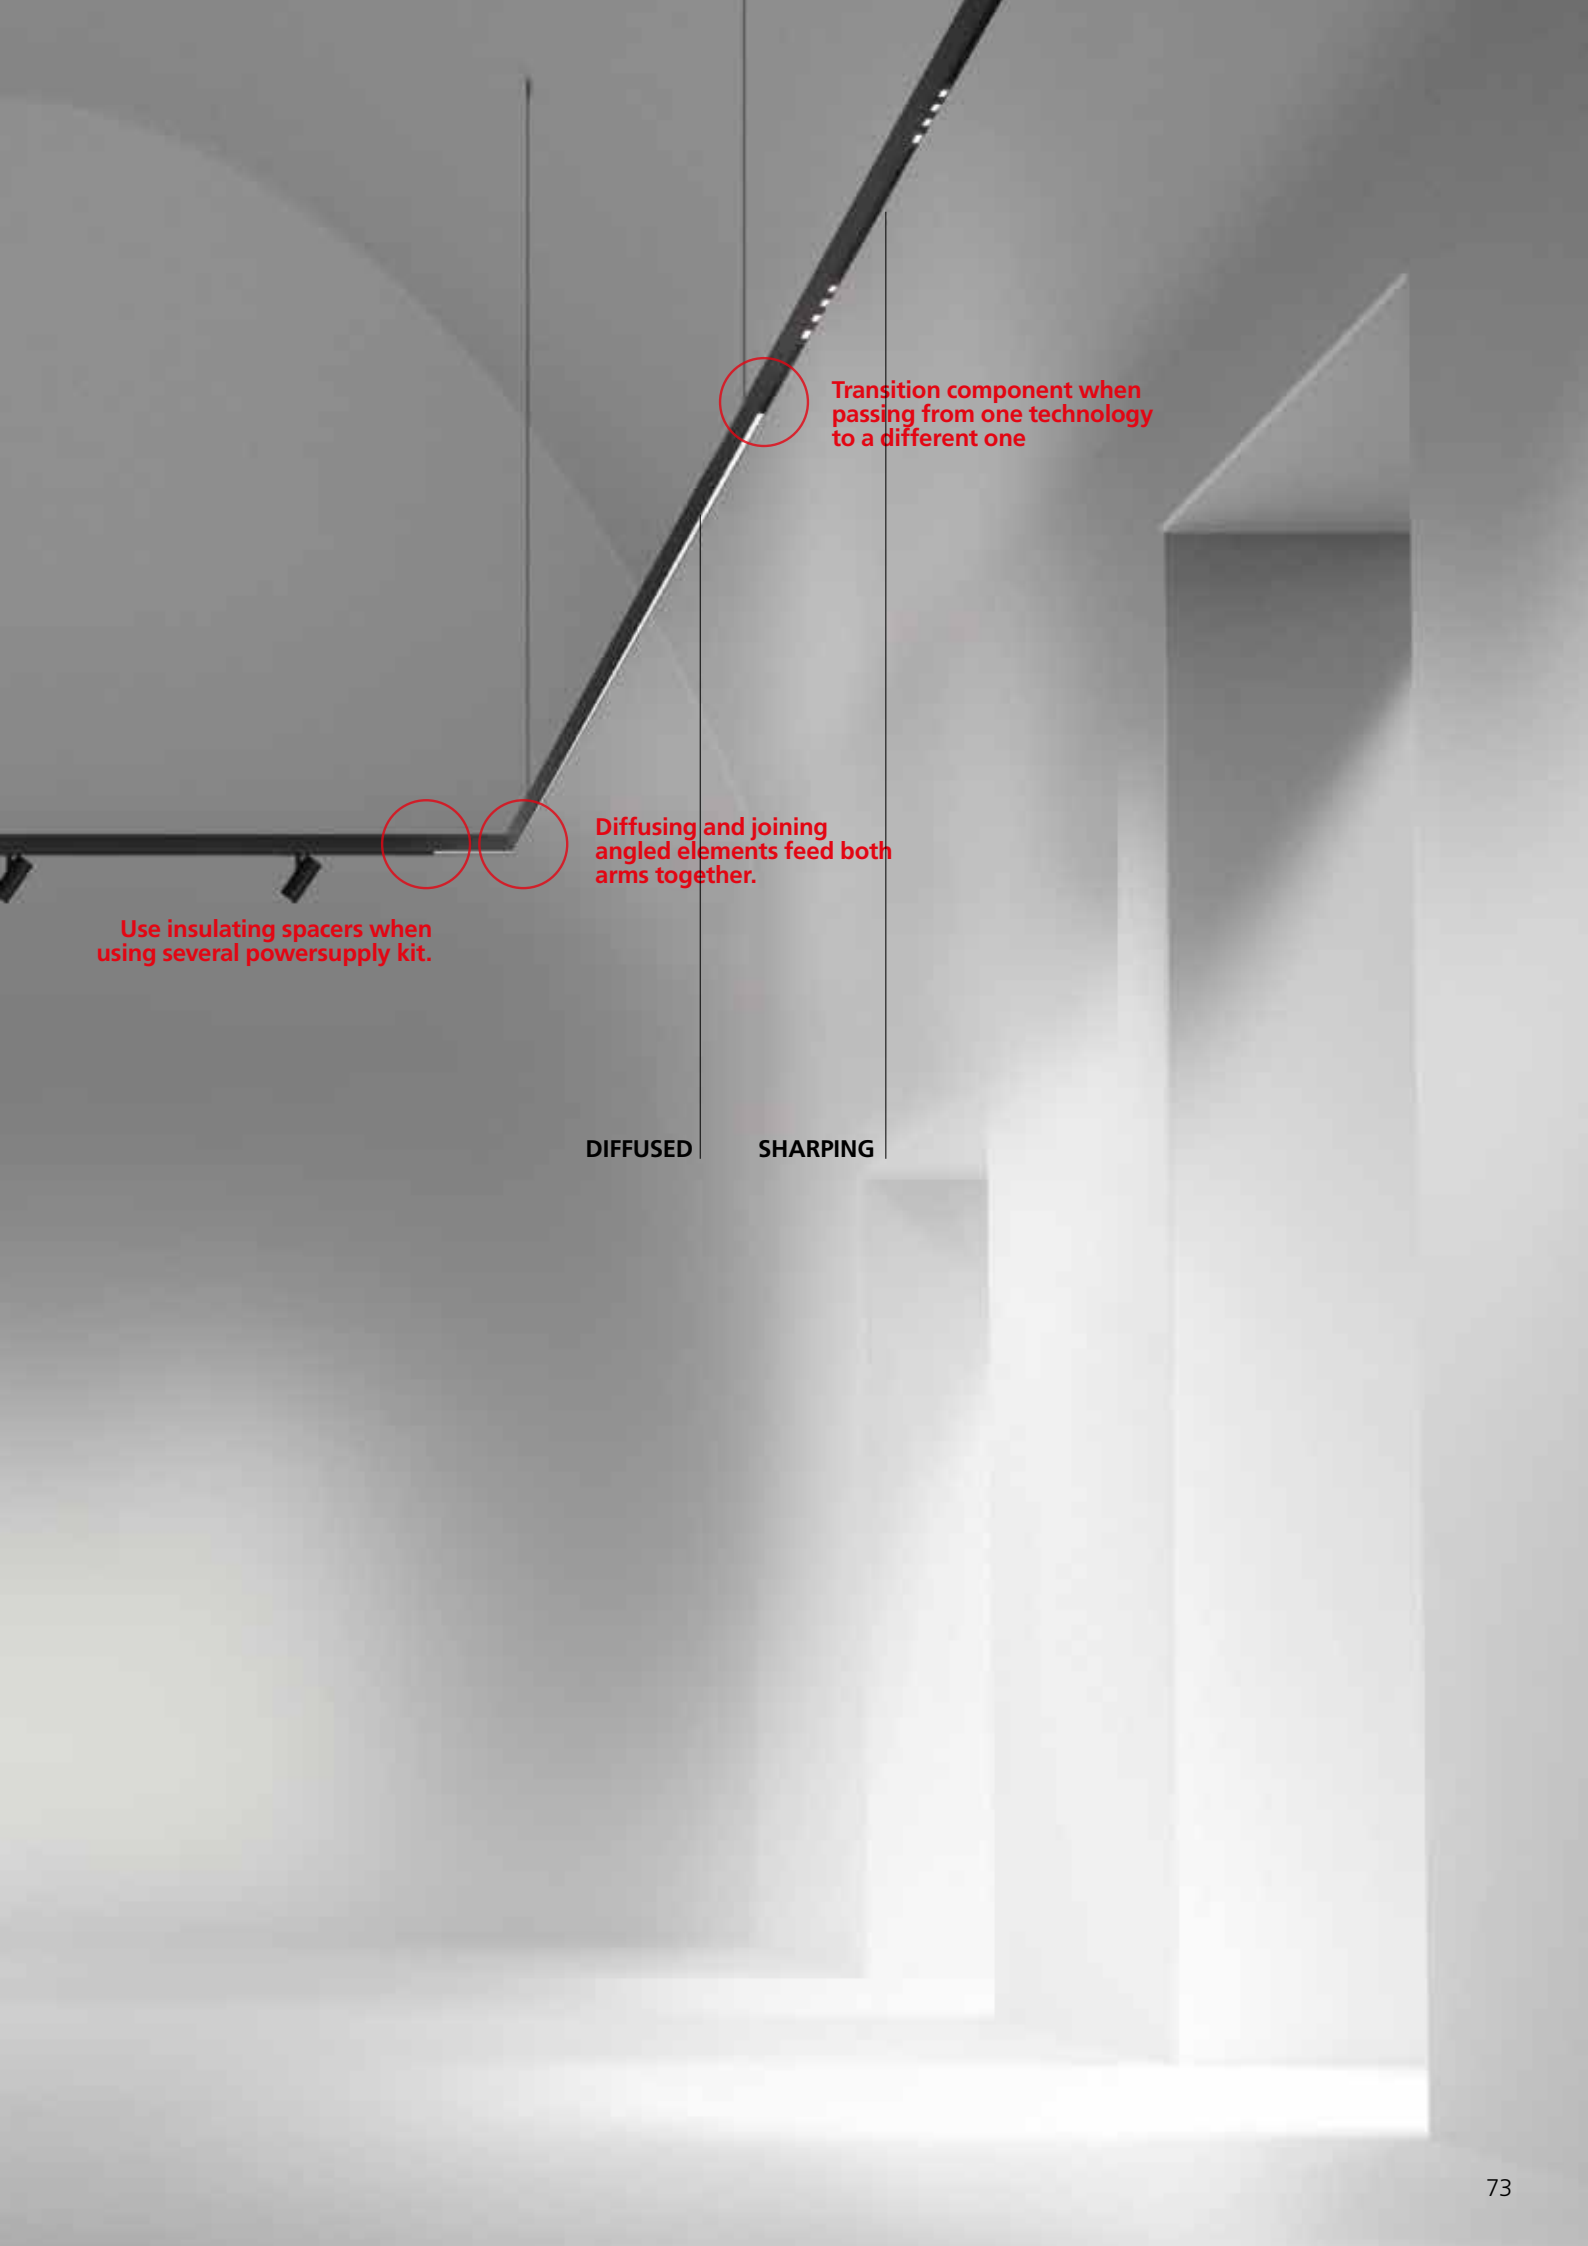

Transition component when passing from one technology to a different one

Diffusing and joining angled elements feed both arms together.

Use insulating spacers when using several powersupply kit.

DIFFUSED

SHARPING

A.24


power supply overview

CEILING
POWER SUPPLY
240W - 150W


RECESSED
POWER SUPPLY
240W - 150W

REMOTE BARE
POWER SUPPLY


REMOTE BOX
POWER SUPPLY
240W - 150W

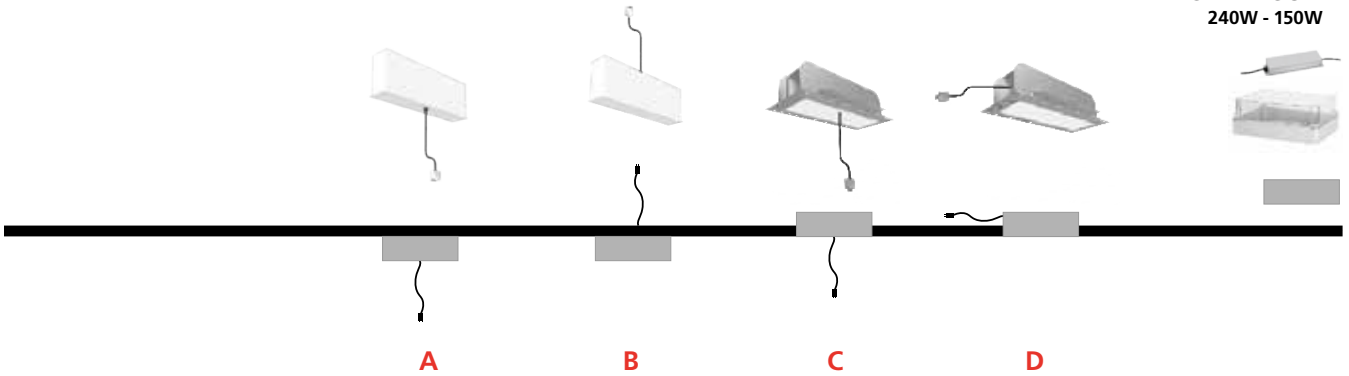


SUSPENSION




SMD



RECESSED




A

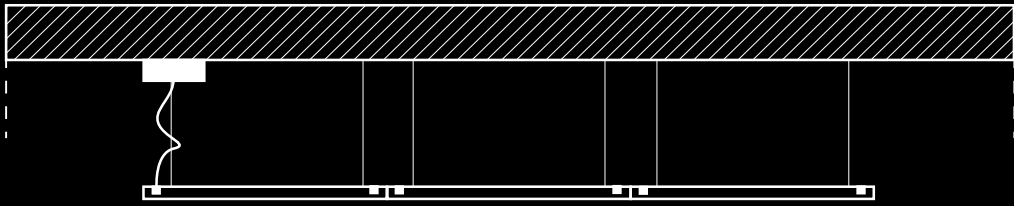

concrete ceiling


C

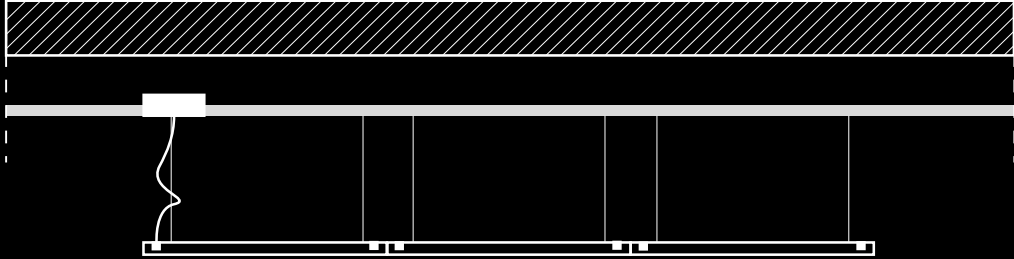

concrete ceiling

plaster ceiling

D

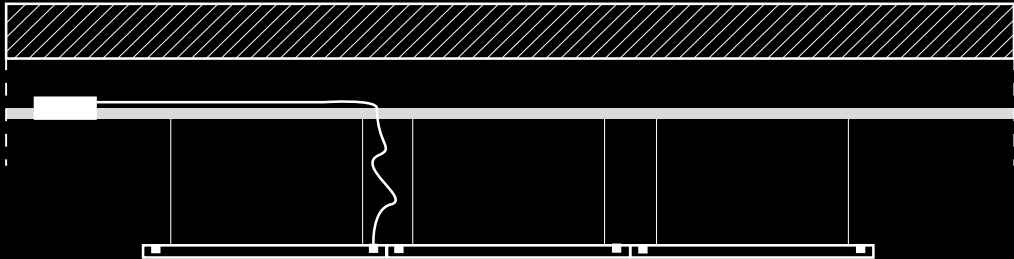

concrete ceiling


plaster ceiling

B



concrete ceiling


D

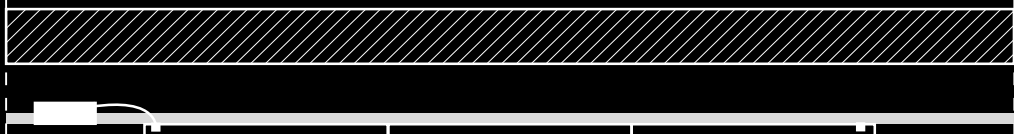

concrete ceiling

plaster ceiling


D

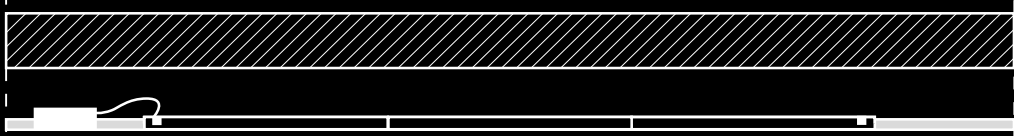

concrete ceiling

plaster ceiling



A modern, curved, illuminated ceiling light fixture is shown in a minimalist room. The fixture is a long, thin, white, curved bar with a glowing white light strip along its top edge. It is suspended from the ceiling by a thin wire. The room has white walls and a light-colored wooden floor. The text "A.24 system" is overlaid on the right side of the image.

A.24 system

A.24 recessed magnetic track

White Black

01 **04**



Fast delivery

IP20

Linear elements

| Length |
|---------|
| 1176mm |
| 2352 mm |



| Code | € |
|---------------------|--------|
| AQ150. 01/04 | 220,00 |
| AQ151. 01/04 | 365,00 |



Angle elements


| |
|---|
| 90° recessed track corner (on same plane) |
| 301x301mm |

| Code | € |
|---------------------|--------|
| AQ155. 01/04 | 240,00 |



| |
|--|
| 90° recessed wall/ceiling track corner (on perpendicular planes) |
| 276x276mm |


| Code | € |
|---------------------|--------|
| AQ156. 01/04 | 240,00 |



Curved joining elements (not magnetic)




| Radius | Alpha |
|--------|-------|
| 561 mm | 60° |
| | 90° |
| 750 mm | 45° |
| | 90° |
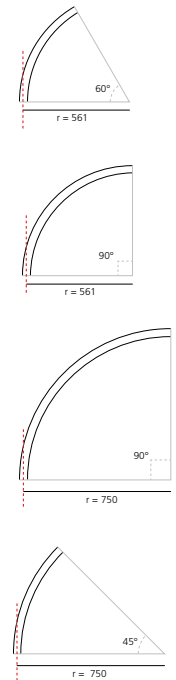
| Code | € |
|---------------------|--------|
| AQ500. 01/04 | 360,00 |
| AQ510. 01/04 | 380,00 |
| AQ520. 01/04 | 370,00 |
| AQ530. 01/04 | 390,00 |













Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
End caps has to be ordered separately.

Accessories

| | Code | € |
|---|---------------------|-------|
|  <p>Insulating spacer (1 pcs) use between modules powered by different power supplies</p> | AQ152. 01/04 | 12,00 |
|  <p>End caps (2 pcs)</p> | AQ153. 01/04 | 30,00 |
|  <p>Transition joint use between different typology modules (track-diffusing-sharping)</p> | AQ290. 01/04 | 16,00 |

Power supply










| | Code | € |
|---|---------------------|--------|
|  <p>240W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  396x195x112H</p> | AQ17801 | 366,00 |
|  <p>240W Ceiling power supply kit for recessed modules 230VAC-48VDC IP20  351x61x111H</p> | AQ173. 01/04 | 401,00 |
|  <p>150W Ceiling power supply kit for recessed modules 230VAC-48VDC IP20  351x61x111H</p> | AQ179. 01/04 | 338,00 |
|  <p>240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H</p> | AQ18000 | 185,00 |
|  <p>150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H</p> | AQ18100 | 100,00 |

Undimmable

| Code | € |
|---------------------|--------|
| AQ17801 | 366,00 |
| AQ173. 01/04 | 401,00 |
| AQ179. 01/04 | 338,00 |
| AQ18000 | 185,00 |
| AQ18100 | 100,00 |

Dimmable DALI

| Code | € |
|---------------------|--------|
| AQ16801 | 495,00 |
| AQ172. 01/04 | 530,00 |
| AQ177. 01/04 | 442,00 |
| AQ18200 | 120,00 |
| AQ16000 | 530,00 |

| | | |
|---|---------------------|--------|
|  <p>240W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  396x195x112H</p> | AQ16801 | 495,00 |
|  <p>240W Ceiling power supply kit for recessed modules 230VAC-48VDC IP20  321x91x111H</p> | AQ172. 01/04 | 530,00 |
|  <p>150W Ceiling power supply kit for recessed modules 230VAC-48VDC IP20  321x91x111H</p> | AQ177. 01/04 | 442,00 |
|  <p>DALI to DALI-Selv Interface 103x67x21H</p> | AQ18200 | 120,00 |
|  <p>240W Remote box power supply kit 230VAC-48VDC IP20 </p> | AQ16000 | 530,00 |

A.24 suspension magnetic track

| | | | | | | |
|---------------|-----------|-------------------------|----------------|----------------|----------------------|------|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | *Uses 1 DALI address | IP20 |
| | | | | | | |
| 01 | 04 | 15 | 18 | 20 | | |
| Fast delivery | | Delivery time on demand | | | | |

Linear elements



Length

1176 mm

2352 mm

Code



| | |
|---------------------|--------|
| AQ400. 01/04 | 235,00 |
| 15/18/20 | 235,00 |
| AQ401. 01/04 | 370,00 |
| 15/18/20 | 370,00 |



Linear + indirect emission elements

| Length | W | CRI | Flux | CCT |
|----------|-------|-----|--------|---------|
| 1176 mm* | 16W | 80 | 1524lm | 2700K |
| | | | | 3000K |
| | | | 1593lm | 4000K |
| | | | | 2352 mm |
| 3000K | | | | |
| 3185lm | 4000K | | | |
| | | | | |



| Code | € |
|---------------------|--------|
| AQ406. 01/04 | 420,00 |
| 15/18/20 | 420,00 |
| AQ402. 01/04 | 420,00 |
| 15/18/20 | 420,00 |
| AQ403. 01/04 | 420,00 |
| 15/18/20 | 420,00 |
| AQ407. 01/04 | 640,00 |
| 15/18/20 | 640,00 |
| AQ404. 01/04 | 640,00 |
| 15/18/20 | 640,00 |
| AQ405. 01/04 | 640,00 |
| 15/18/20 | 640,00 |



90° angle elements

90° suspended track corner (on same plane)
301x301mm





| Code | € |
|---------------------|--------|
| AQ492. 01/04 | 250,00 |
| 15/18/20 | 250,00 |



Curved joining elements (not magnetic)




| Radius | Alpha |
|--------|-------|
| 561 mm | 60° |
| | 90° |
| 750 mm | 45° |
| | 90° |

| Code | € |
|---------------------|--------|
| AQ700. 01/04 | 360,00 |
| 15/18/20 | |
| AQ710. 01/04 | 380,00 |
| 15/18/20 | |
| AQ720. 01/04 | 370,00 |
| 15/18/20 | |
| AQ730. 01/04 | 390,00 |
| 15/18/20 | |









Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 1 suspension cable is also included.
 End caps has to be ordered separately.







Accessories

| | Code | € |
|---|---------------------------------|----------------|
|  Insulating spacer (1 pcs) between modules powered by different power supplies | AQ491. 01/04 15/18/20 | 16,00 16,00 |
|  End cap (2 pcs) including 1 suspension cables | AQ490. 01/04 15/18/20 | 47,00 47,00 |
|  Transition joint between different typology modules (track-diffusing- sharping) | AQ494. 01/04 15/18/20 | 16,00 16,00 |

Power supply

| | Undimmable | | Dimmable DALI |
|---|---------------------|--------|---|
| | Code | € | Code |
|  240W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 Ⓢ 396x195x112H | AQ174. 01/04 | 366,00 | AQ154. 01/04 495,00 |
|  240W Ceiling power supply kit for suspension modules 230VAC-48VDC IP20 Ⓢ 351x61x111H | AQ171. 01/04 | 401,00 | AQ161. 01/04 530,00 |
|  150W Ceiling power supply kit for suspension modules 230VAC-48VDC IP20 Ⓢ 351x61x111H | AQ176. 01/04 | 338,00 | AQ175.\ 01/04 442,00 |
|  240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18000 | 185,00 | AQ18200 120,00 |
|  150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18100 | 100,00 | AQ16000 530,00 |
| | | |  240W Remote box power supply kit 230VAC-48VDC IP20 Ⓢ |



A.24 ceiling magnetic track

| | | | | | |
|---|---|---|---|---|---|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | IP20 |
|  |  |  |  |  |  |
| 01 | 04 | 15 | 18 | 20 | |
| Fast delivery | | Delivery time on demand | | | |

Linear elements

| Length |
|---------|
| 1176 mm |
| 2352 mm |



| Code | € |
|---------------------|--------|
| AQ300. 01/04 | 248,00 |
| 15/18/20 | 248,00 |
| AQ301. 01/04 | 396,00 |
| 15/18/20 | 396,00 |



90° angle elements


| |
|--|
| 90° on same plane track angle elements |
| 301 x 301 mm |

| Code | € |
|---------------------|--------|
| AQ392. 01/04 | 250,00 |
| 15/18/20 | 250,00 |



| |
|--|
| 90° on perpendicular planes track angle elements |
| 330 x 330 mm |





| Code | € |
|---------------------|--------|
| AQ393. 01/04 | 250,00 |
| 15/18/20 | 250,00 |



Curved joining elements (not magnetic)




| Radius | Alpha |
|--------|-------|
| 561 mm | 60° |
| | 90° |
| 750 mm | 45° |
| | 90° |

| Code | € |
|---------------------|--------|
| AQ600. 01/04 | 360,00 |
| 15/18/20 | |
| AQ610. 01/04 | 380,00 |
| 15/18/20 | |
| AQ620. 01/04 | 370,00 |
| 15/18/20 | |
| AQ630. 01/04 | 390,00 |
| 15/18/20 | |








Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 Bracket for fixing to ceiling is included: 1 for 1176 mm length or 2 for 2352 mm length.
 End caps has to be ordered separately.

Accessories

| | Code | € |
|--|---------------------|-------|
|  <p>Insulating spacer (1 pcs) use between modules powered by different power supplies</p> | AQ391. 01/04 | 16,00 |
| | 15/18/20 | 16,00 |
|  <p>End caps (2 pcs)</p> | AQ390. 01/04 | 26,00 |
| | 15/18/20 | 26,00 |
|  <p>Transition joint use between different typology modules (track-diffusing-sharping)</p> | AQ394. 01/04 | 16,00 |
| | 15/18/20 | 16,00 |

Power supply

| | Code | € |
|--|---------------------|--------|
|  <p>240W Recessed power supply kit for ceiling modules 230VAC-48VDC IP20 Ⓢ 396x195x112H</p> | AQ17801 | 366,00 |
|  <p>240W Ceiling power supply kit for ceiling modules 230VAC-48VDC 240W IP20 Ⓢ 351x61x111H</p> | AQ173. 01/04 | 401,00 |
|  <p>150W Ceiling power supply kit for ceiling modules 230VAC-48VDC 240W IP20 Ⓢ 351x61x111H</p> | AQ179. 01/04 | 338,00 |
|  <p>240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H</p> | AQ18000 | 185,00 |
|  <p>150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H</p> | AQ18100 | 100,00 |

Undimmable


| | Code | € |
|--|---------------------|--------|
|  <p>240W Recessed power supply kit for ceiling modules 230VAC-48VDC IP20 Ⓢ 396x195x112H</p> | AQ16801 | 495,00 |
|  <p>240W Ceiling power supply kit for ceiling modules 230VAC-48VDC IP20 Ⓢ 321x91x111H</p> | AQ172. 01/04 | 530,00 |
|  <p>150W Ceiling power supply kit for ceiling modules 230VAC-48VDC IP20 Ⓢ 321x91x111H</p> | AQ177. 01/04 | 442,00 |
|  <p>DALI to DALI-Selv Interface 103x67x21H</p> | AQ18200 | 120,00 |
|  <p>240W Remote box power supply kit 230VAC-48VDC IP20 Ⓢ</p> | AQ16000 | 530,00 |

Vector magnetic 48V dc

| | | | | | | | | |
|---------------|-----------|-------------------------|----------------|----------------|---|---|----|----------------------|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | S | F | WF | IP20 |
| | | | | | | | | |
| 01 | 04 | 15 | 18 | 20 | | | | MacAdam 3SDCM |
| Fast delivery | | Delivery time on demand | | | | | | Life L70 (6K) 50000h |


Vector 40 magnetic

| W | CRI | Beam | Flux | CCT | Dimmable DALI | Code | € | | |
|------|-----|--------|---------------|----------|---------------|----------|---------------|----------|--------|
| 10 W | 90 | S 13° | 540 lm | 2700K | AP011. | 01/04 | 210,00 | | |
| | | | | 3000K | | 15/18/20 | 210,00 | | |
| | | | | 4000K | AP001. | 01/04 | 210,00 | | |
| | | | | | | 15/18/20 | 210,00 | | |
| | | | | F 20° | 584 lm | 2700K | AP051. | 01/04 | 210,00 |
| | | | | | | 3000K | | 15/18/20 | 210,00 |
| | | 4000K | AP012. | | | 01/04 | 210,00 | | |
| | | | | | | 15/18/20 | 210,00 | | |
| | | WF 28° | 528 lm | | | 2700K | AP002. | 01/04 | 210,00 |
| | | | | | | 3000K | | 15/18/20 | 210,00 |
| | | | | 4000K | AP052. | 01/04 | 210,00 | | |
| | | | | | | 15/18/20 | 210,00 | | |
| | | | | 2700K | AP013. | 01/04 | 210,00 | | |
| | | | | 3000K | | 15/18/20 | 210,00 | | |
| | | 4000K | AP003. | 01/04 | 210,00 | | | | |
| | | | | 15/18/20 | 210,00 | | | | |
| | | | | 4000K | AP053. | 01/04 | 210,00 | | |
| | | | | | | 15/18/20 | 210,00 | | |



Vector 55 magnetic

| W | CRI | Beam | Flux | CCT | Dimmable DALI | Code | € | | |
|------|-----|--------|---------------|----------|---------------|----------|---------------|----------|--------|
| 26 W | 90 | S 16° | 1492 lm | 2700K | AP111. | 01/04 | 280,00 | | |
| | | | | 3000K | | 15/18/20 | 280,00 | | |
| | | | | 4000K | AP101. | 01/04 | 280,00 | | |
| | | | | | | 15/18/20 | 280,00 | | |
| | | | | F 22° | 1465 lm | 2700K | AP151. | 01/04 | 280,00 |
| | | | | | | 3000K | | 15/18/20 | 280,00 |
| | | 4000K | AP112. | | | 01/04 | 280,00 | | |
| | | | | | | 15/18/20 | 280,00 | | |
| | | WF 32° | 1596 lm | | | 2700K | AP102. | 01/04 | 280,00 |
| | | | | | | 3000K | | 15/18/20 | 280,00 |
| | | | | 4000K | AP152. | 01/04 | 280,00 | | |
| | | | | | | 15/18/20 | 280,00 | | |
| | | | | 2700K | AP113. | 01/04 | 280,00 | | |
| | | | | 3000K | | 15/18/20 | 280,00 | | |
| | | 4000K | AP103. | 01/04 | 280,00 | | | | |
| | | | | 15/18/20 | 280,00 | | | | |
| | | | | 4000K | AP153. | 01/04 | 280,00 | | |
| | | | | | | 15/18/20 | 280,00 | | |



Accessoires


| | Vector 40 | Vector 55 |
|------------------------------|----------------|----------------|
| | Code | Code |
| | € | € |
| Accessories holder | AP90100 | AP91100 |
| | 7,00 | 7,00 |
| Lens for elliptical emission | AP90200 | AP91200 |
| | 13,00 | 17,00 |
| Soft filter | AP90300 | AP91300 |
| | 10,00 | 14,00 |
| Anti-dazzle louvre | AP90400 | AP91400 |
| | 17,00 | 23,00 |
| Adjustable dowsers | | AP91500 |
| | | 21,00 |



Vector 55 zoom magnetic

| W | CRI | Beam | Flux | CCT |
|------|-----|--------------|---------------|-------|
| 23 W | 90 | F 22°-WF 32° | 1137 - 660 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |


| Dimmable DALI | | |
|---------------|----------|--------|
| Code | | € |
| AN119. | 01/04 | 345,00 |
| | 15/18/20 | 345,00 |
| AN109. | 01/04 | 345,00 |
| | 15/18/20 | 345,00 |
| AN159. | 01/04 | 345,00 |
| | 15/18/20 | 345,00 |



Vector 40 pendant magnetic

| W | CRI | Beam | Flux | CCT |
|------|-----|--------|--------|-------|
| 10 W | 90 | S 13° | 540 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | F 20° | 584 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | WF 28° | 528 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |


| Dimmable DALI | | |
|---------------|----------|--------|
| Code | | € |
| AP211. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP201. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP251. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP212. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP202. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP252. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP213. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP203. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |
| AP253. | 01/04 | 390,00 |
| | 15/18/20 | 390,00 |



Vector 55 magnetic

| W | CRI | Beam | Flux | CCT |
|------|-----|--------|---------|-------|
| 26 W | 90 | S 16° | 1492 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | F 22° | 1465 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| | | WF 32° | 1596 lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |

| Dimmable DALI | | |
|---------------|------------|--------|
| Code | | € |
| AP311. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP301. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP351. | 01/0401/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP312. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP302. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP352. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP313. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP303. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |
| AP353. | 01/04 | 420,00 |
| | 15/18/20 | 420,00 |



A.24 recessed diffused emission

White

01

*Uses 1 DALI address
 ** Uses 2 DALI addresses


IP20

 MacAdam 2SDCM
 Life L70 (6K) 50000h

| Formwork (aluminum) | | |
|-----------------------------------|--------|-------|
| Length | Radius | Alpha |
| Linear 1176mm | | |
| Linear 2352 mm | | |
| 90° angle on same plane | | |
| 90° angle on perpendicular planes | | |
| Curved | 561 mm | 60° |
| | | 90° |
| | 750 mm | 45° |
| | | 90° |


End caps (2pcs)

| Code | € |
|----------------|--------|
| AQ29100 | 151,00 |
| AQ29200 | 230,00 |
| AQ29300 | 140,00 |
| AQ29500 | 55,00 |
| AQ59000 | o.d. |
| AQ59100 | o.d. |
| AQ59200 | o.d. |
| AQ59300 | o.d. |
| AQ29400 | 18,00 |

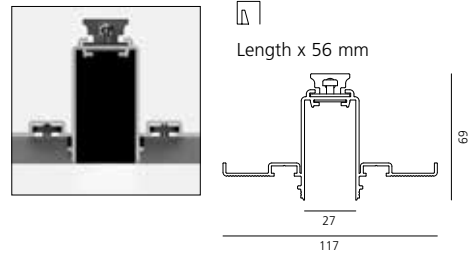

| Linear direct emission elements | | | | |
|---------------------------------|-----|-----|--------|-------|
| Length | W | CRI | Flux | CCT |
| 1176mm* | 33W | 80 | 2884lm | 2700K |
| | | | 2884lm | 3000K |
| | | | 3013lm | 4000K |
| 2352 mm** | 66W | 80 | 5769lm | 2700K |
| | | | 5769lm | 3000K |
| | | | 6027lm | 4000K |


| Code | € |
|----------------|--------|
| AQ27001 | 448,00 |
| AQ20001 | 448,00 |
| AQ20101 | 448,00 |
| AQ27101 | 698,00 |
| AQ20201 | 698,00 |
| AQ20301 | 698,00 |

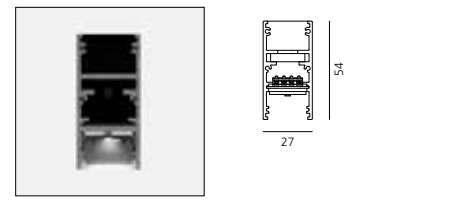

| 90° angle direct emission elements | | | | |
|--|-----|-----|--------|-------|
| | W | CRI | Flux | CCT |
| 90° on same plane angle direct emission elements | 16W | 80 | 1442lm | 2700K |
| | | | 1506lm | 3000K |
| | | | | 4000K |

301 x 301 mm*


| Code | € |
|----------------|--------|
| AQ27201 | 435,00 |
| AQ20401 | 435,00 |
| AQ20501 | 435,00 |

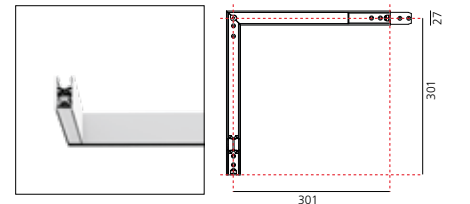

| | W | CRI | Flux | CCT |
|---|-----|-----|--------|-------|
| 90° on perpendicular plane angle direct emission elements | 16W | 80 | 1442lm | 2700K |
| | | | | 3000K |
| | | | 1506lm | 4000K |


330 x 330 mm*

| Code | € |
|----------------|--------|
| AQ27301 | 550,00 |
| AQ20701 | 550,00 |
| AQ20801 | 550,00 |

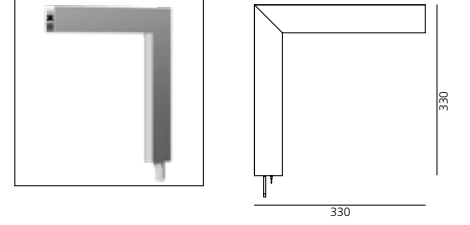






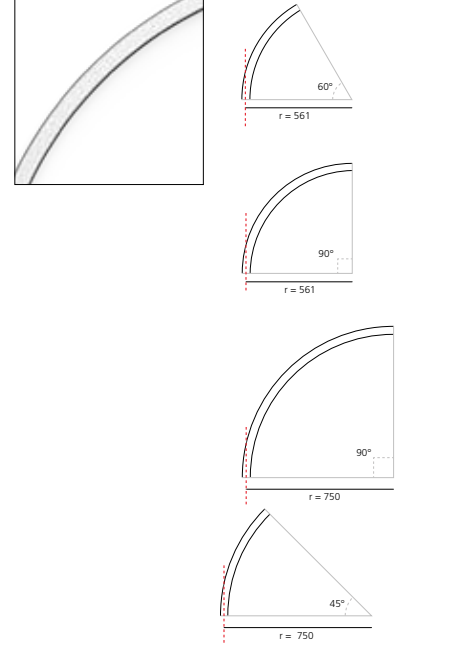









| Curved direct emission elements | | | | | |
|---------------------------------|-------|-----|-----|--------|-------|
| Radius | Alpha | W | CRI | Flux | CCT |
| 561 mm* | 60° | 17W | 80 | 1187lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |
| | 90° | 25W | 80 | 1781lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |
| 750 mm* | 45° | 17W | 80 | 1187lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |
| | 90° | 34W | 80 | 2374lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |

| Code | € |
|----------------|--------|
| AQ50701 | 528,00 |
| AQ50101 | 528,00 |
| AQ50201 | 528,00 |
| AQ51701 | 548,00 |
| AQ51101 | 548,00 |
| AQ51201 | 548,00 |
| AQ52701 | 538,00 |
| AQ52101 | 538,00 |
| AQ52201 | 538,00 |
| AQ53701 | 568,00 |
| AQ53101 | 568,00 |
| AQ53201 | 568,00 |



Each forwork module is provided with a mechanical joint to connect two recessed coplanar forwork modules.
 Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories.
 End caps has to be ordered separately.
 Opal diffusing screen has to be ordered separately.

| Accessories | | Code | € |
|--|--|----------------|--------|
|  | Insulating spacer (1 pcs) between modules powered by different power supplies | AQ20601 | 16,00 |
|  | End caps (2 pcs) | AQ25001 | 48,00 |
|  | Transition joint use between different typology modules (track-diffusing- sharping) | AQ29001 | 16,00 |
|  | Opal diffusing screen 10m | AQ16200 | 130,00 |
| | 25m | AQ16300 | 270,00 |
| | 50m | AQ16400 | 490,00 |
| | 1176 mm | AQ16500 | 25,00 |
| | 2352 mm | AQ16600 | 39,00 |
| | 3528 mm | AQ16700 | 59,00 |
|  | Flexible opal diffusing screen 10m | AQ90000 | o.d. |
| | 25m | AQ90100 | o.d. |
| | 50m | AQ90200 | o.d. |

| Power supply | Undimmable | | Dimmable DALI | | | | |
|---|--|----------------|---------------|---|---|----------------|--------|
| | Code | € | Code | € | | | |
|  | 240W Recessed power supply kit for recessed modules 230VAC-48VDC IP20 ☹ 396x195x112H | AQ17801 | 366,00 |  | 240W Recessed power supply kit for recessed modules 230VAC-48VDC IP20 ☹ 396x195x112H | AQ16801 | 495,00 |
|  | 240W Ceiling power supply kit for recessed modules 230VAC-48VDC IP20 ☹ 351x61x111H | AQ17301 | 401,00 |  | 240W Ceiling power supply kit for recessed modules 230VAC-48VDC IP20 ☹ 321x91x111H | AQ17201 | 530,00 |
|  | 150W Ceiling power supply kit for recessed modules 230VAC-48VDC IP20 ☹ 351x61x111H | AQ17901 | 338,00 |  | 150W Ceiling power supply kit for recessed modules 230VAC-48VDC IP20 ☹ 321x91x111H | AQ17701 | 442,00 |
|  | 240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 ☹ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18000 | 185,00 |  | DALI to DALI-Selv Interface 103x67x21H | AQ18200 | 120,00 |
|  | 150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 ☹ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18100 | 100,00 |  | 240W Remote box power supply kit 230VAC-48VDC IP20 ☹ | AQ16000 | 530,00 |

A.24 suspension diffused emission

| | | | | | | | |
|---------------|-----------|-------------------------|----------------|----------------|--|--|--|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | | | |
| | | | | | | | |
| 01 | 04 | 15 | 18 | 20 | | | |
| Fast delivery | | Delivery time on demand | | | | | |

IP20



 MacAdam 2SDCM
 Life L70 (6K) 50000h

*Uses 1 DALI address
 ** Uses 2 DALI addresses
 *** Uses 3 DALI addresses

Linear direct emission elements

| Length | W | CRI | Flux | CCT |
|-----------|-----|-----|--------|-------|
| 1176 mm* | 33W | 80 | 2884lm | 2700K |
| | | | 2884lm | 3000K |
| | | | 3013lm | 4000K |
| 2352 mm** | 66W | 80 | 5769lm | 2700K |
| | | | 5769lm | 3000K |
| | | | 6027lm | 4000K |


| Code | € |
|---------------------|--------|
| AQ416. 01/04 | 465,00 |
| 15/18/20 | 465,00 |
| AQ410. 01/04 | 465,00 |
| 15/18/20 | 465,00 |
| AQ411. 01/04 | 465,00 |
| 15/18/20 | 465,00 |
| AQ417. 01/04 | 760,00 |
| 15/18/20 | 760,00 |
| AQ412. 01/04 | 760,00 |
| 15/18/20 | 760,00 |
| AQ413. 01/04 | 760,00 |
| 15/18/20 | 760,00 |



Linear direct and indirect emission elements

| Length | W | CRI | Flux | CCT |
|------------|----------------------------|-----|----------------------------------|-------|
| 1176 mm** | 33W direct 16W indirect | 80 | 2884lm direct | 2700K |
| | | | 1524lm indirect | 3000K |
| | | | 3013lm direct 1593lm indirect | 4000K |
| 2352 mm*** | 66W direct 32W indirect | 80 | 5769lm direct | 2700K |
| | | | 3049lm indirect | 3000K |
| | | | 6027lm direct 3185lm indirect | 4000K |



| Code | € |
|---------------------|--------|
| AQ464. 01/04 | 610,00 |
| 15/18/20 | 610,00 |
| AQ460. 01/04 | 610,00 |
| 15/18/20 | 610,00 |
| AQ461. 01/04 | 610,00 |
| 15/18/20 | 610,00 |
| AQ465. 01/04 | 945,00 |
| 15/18/20 | 945,00 |
| AQ462. 01/04 | 945,00 |
| 15/18/20 | 945,00 |
| AQ463. 01/04 | 945,00 |
| 15/18/20 | 945,00 |



90° angle direct emission elements

| | W | CRI | Flux | CCT |
|--|-----|-----|--------|-------|
| 90° on same plane angle direct emission elements | 16W | 80 | 1442lm | 2700K |
| 301 x 301 mm* | | | 1506lm | 4000K |



| Code | € |
|---------------------|--------|
| AQ418. 01/04 | 440,00 |
| 15/18/20 | 440,00 |
| AQ414. 01/04 | 440,00 |
| 15/18/20 | 440,00 |
| AQ415. 01/04 | 440,00 |
| 15/18/20 | 440,00 |



Curved direct emission elements





| Radius | Alpha | W | CRI | Flux | CCT |
|---------|-------|-----|-----|--------|-------|
| 561 mm* | 60° | 17W | 80 | 1187lm | 2700K |
| | | | | 3000K | |
| | | | | 4000K | |
| | 90° | 25W | 80 | 1781lm | 2700K |
| | | | | 3000K | |
| | | | | 4000K | |
| 750 mm* | 45° | 17W | 80 | 1187lm | 2700K |
| | | | | 3000K | |
| | | | | 4000K | |
| | 90° | 34W | 80 | 2374lm | 2700K |
| | | | | 3000K | |
| | | | | 4000K | |
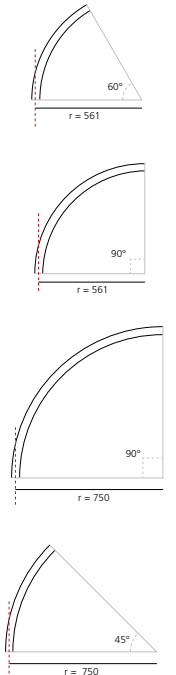
| Code | € |
|---------------------|--------|
| AQ707. 01/04 | 545,00 |
| 15/18/20 | 545,00 |
| AQ701. 01/04 | 545,00 |
| 15/18/20 | 545,00 |
| AQ702. 01/04 | 545,00 |
| 15/18/20 | 545,00 |
| AQ717. 01/04 | 545,00 |
| 15/18/20 | 545,00 |
| AQ711. 01/04 | 545,00 |
| 15/18/20 | 545,00 |
| AQ712. 01/04 | 545,00 |
| 15/18/20 | 545,00 |
| AQ727. 01/04 | 555,00 |
| 15/18/20 | 555,00 |
| AQ721. 01/04 | 555,00 |
| 15/18/20 | 555,00 |
| AQ722. 01/04 | 555,00 |
| 15/18/20 | 555,00 |
| AQ737. 01/04 | 585,00 |
| 15/18/20 | 585,00 |
| AQ731. 01/04 | 585,00 |
| 15/18/20 | 585,00 |
| AQ732. 01/04 | 585,00 |
| 15/18/20 | 585,00 |









Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories.
 1 suspension cable is also included.
 End caps has to be ordered separately.
 Opal diffusing screen has to be ordered separately.

Accessories

| | Code | € |
|---|---------------------------------|----------------|
|  Insulating spacer (1 pcs) between modules powered by different power supplies | AQ452. 01/04 15/18/20 | 17,00 17,00 |
|  End caps (2 pcs) including 1 suspension cables | AQ451. 01/04 15/18/20 | 55,00 55,00 |
|  Transition joint use between different typology modules (track-diffusing-sharping) | AQ494. 01/04 15/18/20 | 16,00 16,00 |
|  Opal diffusing screen | | |
| 10m | AQ16200 | 130,00 |
| 25m | AQ16300 | 270,00 |
| 50m | AQ16400 | 490,00 |
| 1176 mm | AQ16500 | 25,00 |
| 2352 mm | AQ16600 | 39,00 |
| 3528 mm | AQ16700 | 59,00 |
| Flexible opal diffusing screen | | |
| 10m | AQ90000 | o.d. |
| 25m | AQ90100 | o.d. |
| 50m | AQ90200 | o.d. |

Power supply

| | Undimmable | | Dimmable DALI |
|---|---------------------|--------|----------------------------|
| | Code | € | Code |
|  240W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 Ⓢ 396x195x112H | AQ174. 01/04 | 366,00 | AQ154. 01/04 495,00 |
|  240W Ceiling power supply kit for suspension modules 230VAC-48VDC IP20 Ⓢ 351x61x111H | AQ171. 01/04 | 401,00 | AQ161. 01/04 530,00 |
|  150W Ceiling power supply kit for suspension modules 230VAC-48VDC IP20 Ⓢ 351x61x111H | AQ176. 01/04 | 338,00 | AQ175. 01/04 442,00 |
|  240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18000 | 185,00 | AQ18200 120,00 |
|  150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18100 | 100,00 | AQ16000 530,00 |
|  240W Remote box power supply kit 230VAC-48VDC IP20 Ⓢ | | | |


A.24 ceiling - wall diffused emission

| | | | | | | | |
|---------------|-----------|-------------------------|----------------|----------------|--|--------------------------|----------------------|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | | | IP20 |
| | | | | | | | |
| 01 | 04 | 15 | 18 | 20 | | *Uses 1 DALI address | MacAdam 2SDCM |
| Fast delivery | | Delivery time on demand | | | | ** Uses 2 DALI addresses | Life L70 (6K) 50000h |

Linear direct emission elements

| Length | W | CRI | Flux | CCT |
|-----------|-----|-----|--------|-------|
| 1176 mm* | 33W | 80 | 2884lm | 2700K |
| | | | 2884lm | 3000K |
| | | | 3013lm | 4000K |
| 2352 mm** | 66W | 80 | 5769lm | 2700K |
| | | | 5769lm | 3000K |
| | | | 6027lm | 4000K |


| Code | € |
|---------------------|--------|
| AQ370. 01/04 | 568,00 |
| 15/18/20 | 568,00 |
| AQ310. 01/04 | 568,00 |
| 15/18/20 | 568,00 |
| AQ311. 01/04 | 568,00 |
| 15/18/20 | 568,00 |
| AQ371. 01/04 | 921,00 |
| 15/18/20 | 921,00 |
| AQ312. 01/04 | 921,00 |
| 15/18/20 | 921,00 |
| AQ313. 01/04 | 921,00 |
| 15/18/20 | 921,00 |

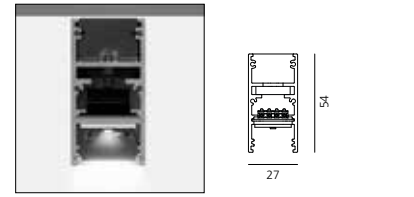

90° angle direct emission elements


| | W | CRI | Flux | CCT |
|--|-----|-----|--------|-------|
| 90° on same plane angle direct emission elements | 16W | 80 | 1442lm | 2700K |
| | | | 1506lm | 4000K |
| 301 x 301 mm* | | | | |

| Code | € |
|---------------------|--------|
| AQ372. 01/04 | 550,00 |
| 15/18/20 | 550,00 |
| AQ314. 01/04 | 550,00 |
| 15/18/20 | 550,00 |
| AQ315. 01/04 | 550,00 |
| 15/18/20 | 550,00 |

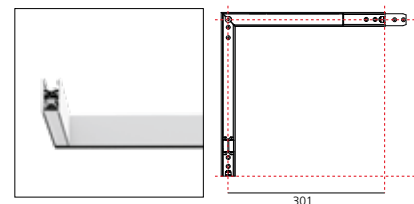

| | W | CRI | Flux | CCT |
|---|-----|-----|--------|-------|
| 90° on perpendicular plane angle direct emission elements | 16W | 80 | 1442lm | 2700K |
| | | | 1506lm | 4000K |
| 330 x 330 mm* | | | | |


| Code | € |
|---------------------|--------|
| AQ373. 01/04 | 550,00 |
| 15/18/20 | 550,00 |
| AQ316. 01/04 | 550,00 |
| 15/18/20 | 550,00 |
| AQ317. 01/04 | 550,00 |
| 15/18/20 | 550,00 |

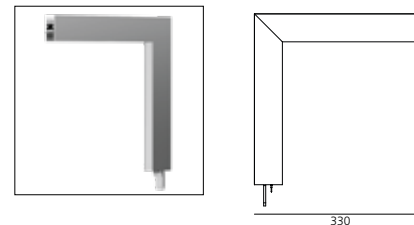

Curved direct emission elements



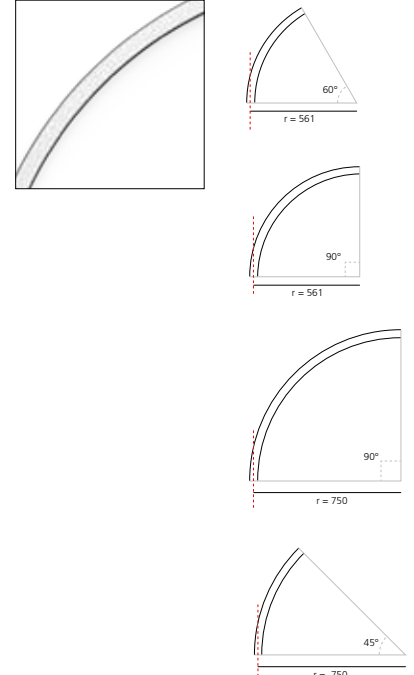

| Radius | Alpha | W | CRI | Flux | CCT |
|---------|-------|-----|-----|--------|-------|
| 561 mm* | 60° | 17W | 80 | 1187lm | 2700K |
| | | | | 3000K | |
| | | | | 4000K | |
| | 90° | 25W | 80 | 1781lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |
| 750 mm* | 45° | 17W | 80 | 1187lm | 2700K |
| | | | | 3000K | |
| | | | | 4000K | |
| | 90° | 34W | 80 | 2374lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |

| Code | € |
|---------------------|--------|
| AQ607. 01/04 | 648,00 |
| 15/18/20 | 648,00 |
| AQ601. 01/04 | 648,00 |
| 15/18/20 | 648,00 |
| AQ602. 01/04 | 648,00 |
| 15/18/20 | 648,00 |
| AQ617. 01/04 | 668,00 |
| 15/18/20 | 668,00 |
| AQ611. 01/04 | 668,00 |
| 15/18/20 | 668,00 |
| AQ612. 01/04 | 668,00 |
| 15/18/20 | 668,00 |
| AQ627. 01/04 | 658,00 |
| 15/18/20 | 658,00 |
| AQ621. 01/04 | 658,00 |
| 15/18/20 | 658,00 |
| AQ622. 01/04 | 658,00 |
| 15/18/20 | 658,00 |
| AQ637. 01/04 | 688,00 |
| 15/18/20 | 688,00 |
| AQ631. 01/04 | 688,00 |
| 15/18/20 | 688,00 |
| AQ632. 01/04 | 688,00 |
| 15/18/20 | 688,00 |









Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 Bracket for fixing to ceiling is included:
 1 for 1176 mm length.
 2 for 2352 mm length.
 End caps has to be ordered separately.
 Opal diffusing screen has to be ordered separately.

Accessories

| | Code | € |
|---|---------------------------------|----------------|
|  Insulating spacer (1 pc) between modules powered by different power supplies | AQ351. 01/04 15/18/20 | 16,00 16,00 |
|  End cap (2 pcs) | AQ350. 01/04 15/18/20 | 32,00 32,00 |
|  Transition cap track - diffusing track- sharpening diffusing - sharpening | AQ394. 01/04 15/18/20 | 16,00 16,00 |
|  Opal diffusing screen | | |
| 10m | AQ16200 | 130,00 |
| 25m | AQ16300 | 270,00 |
| 50m | AQ16400 | 490,00 |
| 1176 mm | AQ16500 | 25,00 |
| 2352 mm | AQ16600 | 39,00 |
| 3528 mm | AQ16700 | 59,00 |
| Flexible opal diffusing screen | | |
| 10m | AQ90000 | o.d. |
| 25m | AQ90100 | o.d. |
| 50m | AQ90200 | o.d. |

Power supply

| | Undimmable | | Dimmable DALI |
|---|---------------------|--------|----------------------------|
| | Code | € | Code |
|  240W Recessed power supply kit for ceiling modules 230VAC-48VDC IP20 Ⓢ 396x195x112H | AQ17801 | 366,00 | AQ16801 495,00 |
|  240W Ceiling power supply kit for ceiling modules 230VAC-48VDC 240W IP20 Ⓢ 351x61x111H | AQ173. 01/04 | 401,00 | AQ172. 01/04 530,00 |
|  150W Ceiling power supply kit for ceiling modules 230VAC-48VDC 240W IP20 Ⓢ 351x61x111H | AQ179. 01/04 | 338,00 | AQ177. 01/04 442,00 |
|  240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18000 | 185,00 | AQ18200 120,00 |
|  150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18100 | 100,00 | AQ16000 530,00 |
|  240W Remote box power supply kit 230VAC-48VDC IP20 Ⓢ | | | |

A.24 Module

Structural module

Mechanical and electrical joints


Optics

Sharping Kit

End Cover

Louver

Intermediate cover

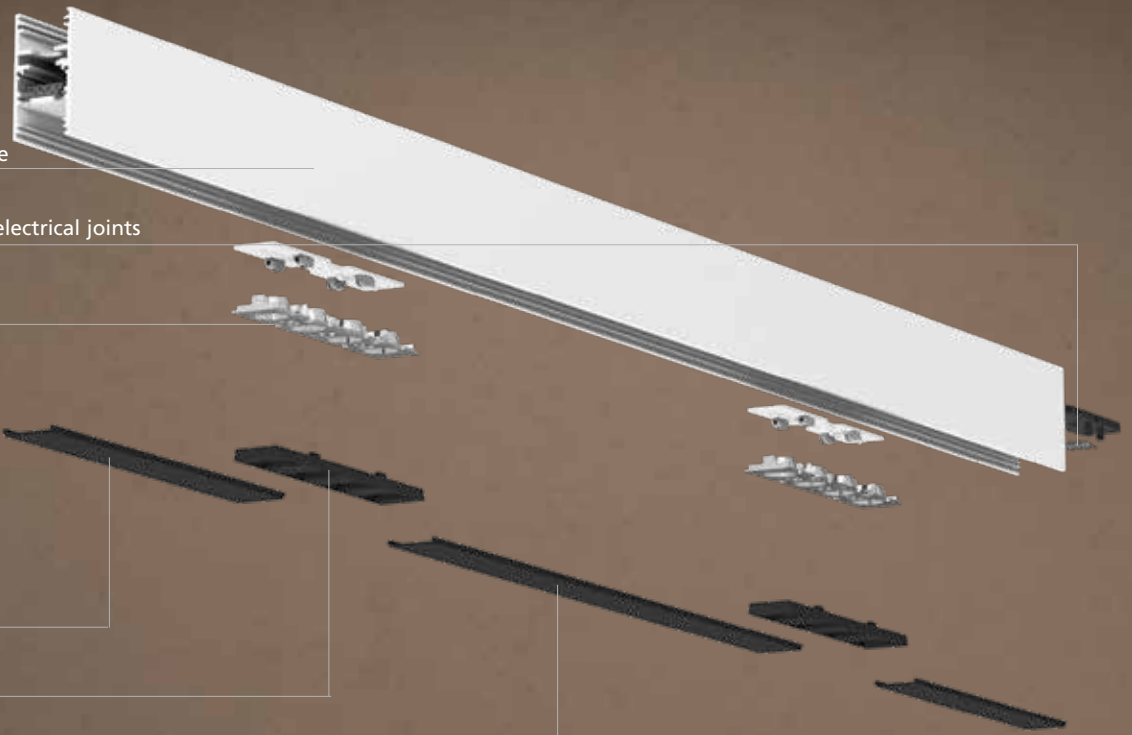



A.24 recessed sharpening emission

White Black

01 04
Fast delivery

F WF

*Uses 1 DALI address
** Uses 2 DALI addresses

IP20


MacAdam 2SDCM
Life L70 (6K) 50000h

Formwork (aluminum)

| Length | Radius | Alpha |
|-----------------------------------|--------|-------|
| Linear 1176mm | | |
| Linear 2352 mm | | |
| 90° angle on same plane | | |
| 90° angle on perpendicular planes | | |
| Curved | 561 mm | 60° |
| | | 90° |
| | 750 mm | 45° |
| | | 90° |

End caps (2pcs)


| Code | € |
|---------|--------|
| AQ29100 | 151,00 |
| AQ29200 | 230,00 |
| AQ29300 | 140,00 |
| AQ29500 | 55,00 |
| AQ59000 | o.d. |
| AQ59100 | o.d. |
| AQ59200 | o.d. |
| AQ59300 | o.d. |
| AQ29400 | 18,00 |

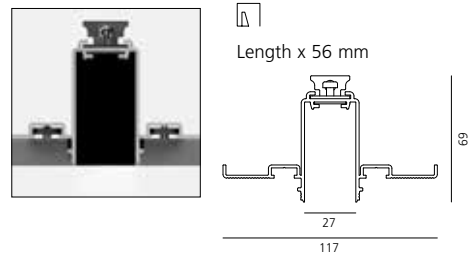

Linear direct emission elements

| Length | W | CRI | Beam | Flux | CCT |
|-----------|-----|-----|--------|--------|-------|
| 1176mm* | 25W | 90 | F 24° | 1678lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |
| | | | XF 62° | 1555lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |
| 2352 mm** | 50W | 90 | F 24° | 3356lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |
| | | | XF62° | 3111lm | 2700K |
| | | | | | 3000K |
| | | | | | 4000K |


| Code | € |
|--------------|--------|
| AQ214. 01/04 | 597,00 |
| AQ210. 01/04 | 597,00 |
| AQ211. 01/04 | 597,00 |
| AQ234. 01/04 | 597,00 |
| AQ230. 01/04 | 597,00 |
| AQ231. 01/04 | 597,00 |
| AQ215. 01/04 | 962,00 |
| AQ212. 01/04 | 962,00 |
| AQ213. 01/04 | 962,00 |
| AQ235. 01/04 | 962,00 |
| AQ232. 01/04 | 962,00 |
| AQ233. 01/04 | 962,00 |

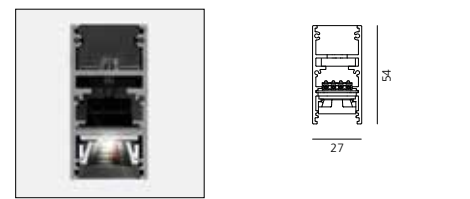

90° angle joining elements (not lit)

| |
|---|
| 90° recessed corner (on same plane) 301x301mm |
|---|


| Code | € |
|-------------|--------|
| AQ240 01/04 | 255,00 |

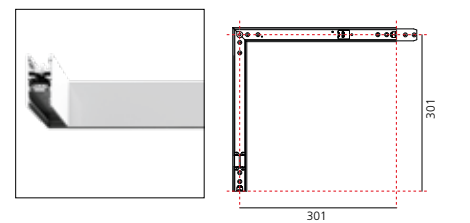

Curved direct emission elements


| Radius | Alpha | W | CRI | Beam | Flux | CCT |
|---------|-------|-----|--------|--------|-------|-------|
| 561 mm* | 60° | 12W | 90 | F 24° | 839lm | 2700K |
| | | | | | | 3000K |
| | | | | | | 4000K |
| | | | | XF 62° | 777lm | 2700K |
| | | | | | | 3000K |
| | | | | | | 4000K |
| 90° | 12W | 90 | F 24° | 839lm | 2700K | |
| | | | | | 3000K | |
| | | | | | 4000K | |
| | | | XF 62° | 777lm | 2700K | |
| | | | | | 3000K | |
| | | | | | 4000K | |
| 750 mm* | 45° | 12W | 90 | F 24° | 839lm | 2700K |
| | | | | | | 3000K |
| | | | | | | 4000K |
| | | | | XF 62° | 777lm | 2700K |
| | | | | | | 3000K |
| | | | | | | 4000K |
| 90° | 25W | 90 | F 24° | 1678lm | 2700K | |
| | | | | | 3000K | |
| | | | | | 4000K | |
| | | | XF 62° | 1555lm | 2700K | |
| | | | | | 3000K | |
| | | | | | 4000K | |

| Code | € |
|--------------|--------|
| AQ508. 01/04 | 677,00 |
| AQ503. 01/04 | 677,00 |
| AQ505. 01/04 | 677,00 |
| AQ509. 01/04 | 677,00 |
| AQ504. 01/04 | 677,00 |
| AQ506. 01/04 | 677,00 |
| AQ518. 01/04 | 697,00 |
| AQ513. 01/04 | 697,00 |
| AQ515. 01/04 | 697,00 |
| AQ519. 01/04 | 697,00 |
| AQ514. 01/04 | 697,00 |
| AQ516. 01/04 | 697,00 |
| AQ528. 01/04 | 687,00 |
| AQ523. 01/04 | 687,00 |
| AQ525. 01/04 | 687,00 |
| AQ529. 01/04 | 687,00 |
| AQ524. 01/04 | 687,00 |
| AQ526. 01/04 | 687,00 |
| AQ538. 01/04 | 717,00 |
| AQ533. 01/04 | 717,00 |
| AQ535. 01/04 | 717,00 |
| AQ539. 01/04 | 717,00 |
| AQ534. 01/04 | 717,00 |
| AQ536. 01/04 | 717,00 |

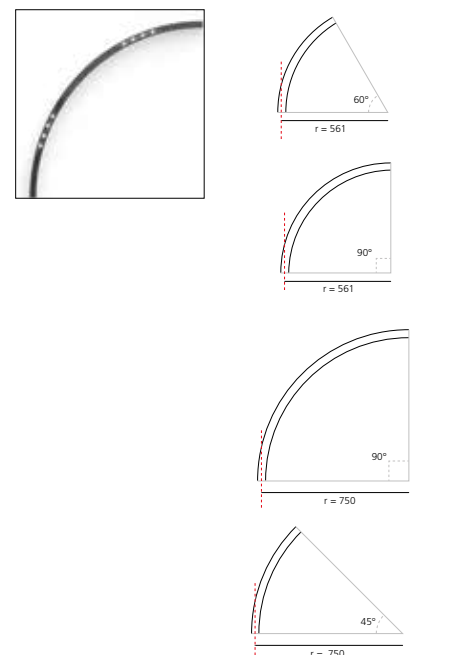

Each forwork module is provided with a mechanical joint to connect two recessed coplanar forwork modules.
 Each module, angle and curved elements are provided with mechanical and electrical joints and instalation accessories.
 End caps has to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.

Accessories



Insulating spacer
 (1 pc) between modules
 powered by different power
 supplies

Code €
AQ241 01/04 16,00



Sharping kit L=1176mm
 (2 louvers - 1 intermediate
 cover - 2 end covers)
Sharping kit L=2352mm
 (4 louvers - 3 intermediate
 cover - 2 end covers)
90° angle cover
 (2 pcs)

Code €
AQ260. 01/04 42,00



End caps
 (2 pcs)

AQ250 01/04 48,00

AQ261. 01/04 65,00

AQ262. 01/04 20,00



Transition joint
 use between different
 typology modules
 (track-diffusing-sharping)

AQ290 01/04 16,00



Louver for curved elements
R=561mm (1pc)
Louver for curved elements
R=750mm
 (order 1pc for 45°, 2 pcs for 90°)

AQ910. 01/04 o.d.

AQ911. 01/04 o.d.

Flexible cover 10m


AQ920. 01/04 o.d.

Power supply



**240W Recessed power
 supply kit**
 for recessed modules
 230VAC-48VDC
IP20 Ⓢ
396x195x112H

Undimmable
Code €
AQ17801 366,00



**240W Recessed power
 supply kit**
 for recessed modules
 230VAC-48VDC
IP20 Ⓢ
396x195x112H

Dimmable DALI
Code €
AQ16801 495,00



**240W Ceiling power
 supply kit**
 for recessed modules
 230VAC-48VDC
IP20 Ⓢ
351x61x111H

AQ173. 01/04 401,00




**240W Ceiling power
 supply kit**
 for recessed modules
 230VAC-48VDC
IP20 Ⓢ
321x91x111H

AQ172. 01/04 530,00




**150W Ceiling power
 supply kit**
 for recessed modules
 230VAC-48VDC
IP20 Ⓢ
351x61x111H

AQ179. 01/04 338,00




**150W Ceiling power
 supply kit**
 for recessed modules
 230VAC-48VDC
IP20 Ⓢ
321x91x111H

AQ177. 01/04 442,00



240W Bare power supply + plug
ON-OFF 230VAC-48VDC
IP20 Ⓢ
 (for dimmable version to be
 combined with "DALI-Selv
 interface") **244x68x38H**

AQ18000 185,00



DALI to DALI-Selv Interface
103x67x21H

AQ18200 120,00



150W Bare power supply + plug
ON-OFF 230VAC-48VDC
IP20 Ⓢ
 (for dimmable version to be
 combined with "DALI-Selv
 interface") **244x68x38H**

AQ18100 100,00



**240W Remote box power
 supply kit**
 230VAC-48VDC
IP20 Ⓢ

AQ16000 530,00


A.24 suspension sharpening emission

| | | | | | | | |
|---------------|-----------|-------------------------|----------------|----------------|---|----|----------------------|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | F | WF | IP20 |
| | | | | | | | |
| 01 | 04 | 15 | 18 | 20 | | | MacAdam 2SDCM |
| Fast delivery | | Delivery time on demand | | | | | Life L70 (6K) 50000h |

*Uses 1 DALI address
 ** Uses 2 DALI addresses
 *** Uses 3 DALI addresses


Linear direct emission elements

| Length | W | CRI | Beam | Flux | CCT | Code | € |
|-----------|-------|--------|--------|---------------------|---------------------|---------------------|--------|
| 1176 mm* | 25W | 90 | F 24° | 1678lm | 2700K | AQ424. 01/04 | 575,00 |
| | | | | | | 15/18/20 | 575,00 |
| | | | | | 3000K | AQ420. 01/04 | 575,00 |
| | | | | | | 15/18/20 | 575,00 |
| | | | | | 4000K | AQ421. 01/04 | 575,00 |
| | | | | | | 15/18/20 | 575,00 |
| | | XF 62° | 1555lm | 2700K | AQ444. 01/04 | 575,00 | |
| | | | | 15/18/20 | 575,00 | | |
| | 3000K | | | AQ440. 01/04 | 575,00 | | |
| | | | | 15/18/20 | 575,00 | | |
| | 4000K | | | AQ441. 01/04 | 575,00 | | |
| | | | | 15/18/20 | 575,00 | | |
| 2352 mm** | 50W | 90 | F 24° | 3356lm | 2700K | AQ425. 01/04 | 930,00 |
| | | | | | | 15/18/20 | 930,00 |
| | | | | | 3000K | AQ422. 01/04 | 930,00 |
| | | | | | | 15/18/20 | 930,00 |
| | | | | | 4000K | AQ423. 01/04 | 930,00 |
| | | | | | | 15/18/20 | 930,00 |
| | | XF 62° | 3111lm | 2700K | AQ445. 01/04 | 930,00 | |
| | | | | 15/18/20 | 930,00 | | |
| | 3000K | | | AQ442. 01/04 | 930,00 | | |
| | | | | 15/18/20 | 930,00 | | |
| | 4000K | | | AQ443. 01/04 | 930,00 | | |
| | | | | 15/18/20 | 930,00 | | |



Linear direct and indirect emission elements

| Length | W | CRI | Beam | Flux | CCT | Code | € |
|------------|------------------------------|--------|----------------------------------|---------------------|---------------------|---------------------|----------|
| 1176 mm** | 25W direct 16W indirect | 90 | F 24° | 1678lm direct | 2700K | AQ482. 01/04 | 705,00 |
| | | | | 1524lm indirect | | 15/18/20 | 705,00 |
| | | | | | 3000K | AQ470. 01/04 | 705,00 |
| | | | | | | 15/18/20 | 705,00 |
| | | | | | 4000K | AQ471. 01/04 | 705,00 |
| | | | | | | 15/18/20 | 705,00 |
| | | XF 62° | 1555lm direct 1524lm indirect | 2700K | AQ486. 01/04 | 705,00 | |
| | | | | 15/18/20 | 705,00 | | |
| | 3000K | | | AQ478. 01/04 | 705,00 | | |
| | | | | 15/18/20 | 705,00 | | |
| | 4000K | | | AQ479. 01/04 | 705,00 | | |
| | | | | 15/18/20 | 705,00 | | |
| 2352 mm*** | 50W indirect 32W indirect | 90 | F 24° | 3356lm direct | 2700K | AQ483. 01/04 | 1.075,00 |
| | | | | 3049lm indirect | | 15/18/20 | 1.075,00 |
| | | | | | 3000K | AQ472. 01/04 | 1.075,00 |
| | | | | | | 15/18/20 | 1.075,00 |
| | | | | | 4000K | AQ473. 01/04 | 1.075,00 |
| | | | | | | 15/18/20 | 1.075,00 |
| | | XF 62° | 3111lm direct 3049lm indirect | 2700K | AQ487. 01/04 | 1.075,00 | |
| | | | | 15/18/20 | 1.075,00 | | |
| | 3000K | | | AQ480. 01/04 | 1.075,00 | | |
| | | | | 15/18/20 | 1.075,00 | | |
| | 4000K | | | AQ481. 01/04 | 1.075,00 | | |
| | | | | 15/18/20 | 1.075,00 | | |





Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 Bracket for fixing to ceiling is included: 1 for 1176 mm length - 2 for 2352 mm length.
 End caps has to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.

90° angle joining elements (not lit)

90° suspension corner (on same plane)
 301x301mm


| Code | € |
|-------------|--------|
| AQ450.01/04 | 360,00 |
| 15/18/20 | 360,00 |



Curved direct emission elements






| Radius | Alpha | W | CRI | Beam | Flux | CCT | | |
|---------|-------|-----|-----|-------|--------|--------|--------|-------|
| 561 mm* | 60° | 17W | 90 | F 24° | 839lm | 2700K | | |
| | | | | | | 3000K | | |
| | | | | | | 4000K | | |
| | | | | | | XF 62° | 777lm | 2700K |
| | | | | | | 3000K | | |
| | | | | | | 4000K | | |
| | 90° | 25W | 90 | F 24° | 839lm | 2700K | | |
| | | | | | | 3000K | | |
| | | | | | | 4000K | | |
| | | | | | | XF 62° | 777lm | 2700K |
| | | | | | | 3000K | | |
| | | | | | | 4000K | | |
| 750 mm* | 45° | 17W | 90 | F 24° | 839lm | 2700K | | |
| | | | | | | 3000K | | |
| | | | | | | 4000K | | |
| | | | | | | XF 62° | 777lm | 2700K |
| | | | | | | 3000K | | |
| | | | | | | 4000K | | |
| | 90° | 34W | 90 | F 24° | 1678lm | 2700K | | |
| | | | | | | 3000K | | |
| | | | | | | 4000K | | |
| | | | | | | XF 62° | 1555lm | 2700K |
| | | | | | | 3000K | | |
| | | | | | | 4000K | | |
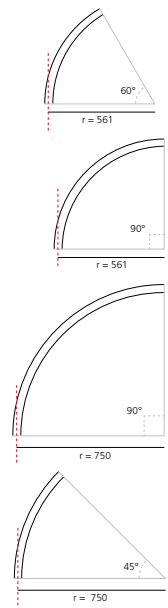
| Code | € |
|-------------|--------|
| AQ708.01/04 | 677,00 |
| 15/18/20 | 677,00 |
| AQ703.01/04 | 677,00 |
| 15/18/20 | 677,00 |
| AQ705.01/04 | 677,00 |
| 15/18/20 | 677,00 |
| AQ709.01/04 | 677,00 |
| 15/18/20 | 677,00 |
| AQ704.01/04 | 677,00 |
| 15/18/20 | 677,00 |
| AQ706.01/04 | 677,00 |
| 15/18/20 | 677,00 |
| AQ718.01/04 | 697,00 |
| 15/18/20 | 697,00 |
| AQ713.01/04 | 697,00 |
| 15/18/20 | 697,00 |
| AQ715.01/04 | 697,00 |
| 15/18/20 | 697,00 |
| AQ719.01/04 | 697,00 |
| 15/18/20 | 697,00 |
| AQ714.01/04 | 697,00 |
| 15/18/20 | 697,00 |
| AQ716.01/04 | 697,00 |
| 15/18/20 | 697,00 |
| AQ728.01/04 | 687,00 |
| 15/18/20 | 687,00 |
| AQ723.01/04 | 687,00 |
| 15/18/20 | 687,00 |
| AQ725.01/04 | 687,00 |
| 15/18/20 | 687,00 |
| AQ729.01/04 | 687,00 |
| 15/18/20 | 687,00 |
| AQ724.01/04 | 687,00 |
| 15/18/20 | 687,00 |
| AQ726.01/04 | 687,00 |
| 15/18/20 | 687,00 |
| AQ738.01/04 | 717,00 |
| 15/18/20 | 717,00 |
| AQ733.01/04 | 717,00 |
| 15/18/20 | 717,00 |
| AQ735.01/04 | 717,00 |
| 15/18/20 | 717,00 |
| AQ739.01/04 | 717,00 |
| 15/18/20 | 717,00 |
| AQ734.01/04 | 717,00 |
| 15/18/20 | 717,00 |
| AQ736.01/04 | 717,00 |
| 15/18/20 | 717,00 |













Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 Bracket for fixing to ceiling is included: 1 for 1176 mm length - 2 for 2352 mm length.
 End caps has to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.

Accessories

| | | Code | € | | | Code | € |
|---|--|---------------------|-------|---|---|---------------------|-------|
|  | Insulating spacer (1 pcs) between modules powered by different power supplies | AQ453. 01/04 | 16,00 |  | Sharping kit L=1176mm (2 louvers - 1 intermediate cover - 2 end covers) | AQ260. 01/04 | 42,00 |
| | | 15/18/20 | 16,00 | | Sharping kit L=2352mm (4 louvers - 3 intermediate cover - 2 end covers) | AQ261. 01/04 | 65,00 |
|  | End caps (2 pcs) | AQ451. 01/04 | 55,00 | | 90° angle cover (2 pcs) | AQ262. 01/04 | 20,00 |
| | | 15/18/20 | 55,00 | | | | |
|  | Transition cap track - diffusing track - sharpening diffusing - sharpening | AQ494. 01/04 | 16,00 |  | Louver for curved elements R=561mm (1pc) | AQ910. 01/04 | o.d. |
| | | 15/18/20 | 16,00 | | Louver for curved elements R=750mm (order 1pc for 45°, 2 pcs for 90°) | AQ911. 01/04 | o.d. |
| | | | | | Flexible cover 10m | AQ920. 01/04 | o.d. |

Power supply

| | | Undimmable | | Dimmable DALI | | | |
|---|--|---------------------|--------|---|---|---------------------|--------|
| | | Code | € | Code | € | | |
|  | 240W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 ☺ 396x195x112H | AQ174. 01/04 | 366,00 |  | 240W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 ☺ 396x195x112H | AQ154. 01/04 | 495,00 |
|  | 240W Ceiling power supply kit for suspension modules 230VAC-48VDC IP20 ☺ 351x61x111H | AQ171. 01/04 | 401,00 |  | 240W Ceiling power supply kit for suspension modules 230VAC-48VDC IP20 ☺ 321x91x111H | AQ161. 01/04 | 530,00 |
|  | 150W Ceiling power supply kit for suspension modules 230VAC-48VDC IP20 ☺ 351x61x111H | AQ176. 01/04 | 338,00 |  | 150W Ceiling power supply kit for suspension modules 230VAC-48VDC IP20 ☺ 321x91x111H | AQ175. 01/04 | 442,00 |
|  | 240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 ☺ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18000 | 185,00 |  | DALI to DALI-Selv Interface 103x67x21H | AQ18200 | 120,00 |
|  | 150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 ☺ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18100 | 100,00 |  | 240W Remote box power supply kit 230VAC-48VDC IP20 ☺ | AQ16000 | 530,00 |



A.24 ceiling sharping emission


| | | | | | | | |
|---------------|-----------|-------------------------|----------------|----------------|---|----|----------------------|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | F | WF | IP20 |
| | | | | | | | |
| 01 | 04 | 15 | 18 | 20 | | | MacAdam 2SDCM |
| Fast delivery | | Delivery time on demand | | | | | Life L70 (6K) 50000h |

*Uses 1 DALI address
** Uses 2 DALI addresses

Linear direct emission elements

| Length | W | CRI | Beam | Flux | CCT | | | | | |
|----------|--------|-------|--------|--------|-----------|-----|----|-------|--------|-------|
| 1176 mm* | 25W | 90 | F 24° | 1678lm | 2700K | | | | | |
| | | | | | 3000K | | | | | |
| | | | | | 4000K | | | | | |
| | | | XF 62° | 1555lm | 2700K | | | | | |
| | | | | | 3000K | | | | | |
| | | | | | 4000K | | | | | |
| | | | | | 2352 mm** | 50W | 90 | F 24° | 3356lm | 2700K |
| | | | | | | | | | | 3000K |
| | | | | | | | | | | 4000K |
| XF 62° | 3111lm | 2700K | | | | | | | | |
| | | 3000K | | | | | | | | |
| | | 4000K | | | | | | | | |


| Code | € |
|---------------------|--------|
| AQ324. 01/04 | 588,00 |
| 15/18/20 | 588,00 |
| AQ320. 01/04 | 588,00 |
| 15/18/20 | 588,00 |
| AQ321. 01/04 | 588,00 |
| 15/18/20 | 588,00 |
| AQ344. 01/04 | 588,00 |
| 15/18/20 | 588,00 |
| AQ340. 01/04 | 588,00 |
| 15/18/20 | 588,00 |
| AQ341. 01/04 | 588,00 |
| 15/18/20 | 588,00 |
| AQ325. 01/04 | 956,00 |
| 15/18/20 | 956,00 |
| AQ322. 01/04 | 956,00 |
| 15/18/20 | 956,00 |
| AQ323. 01/04 | 956,00 |
| 15/18/20 | 956,00 |
| AQ345. 01/04 | 956,00 |
| 15/18/20 | 956,00 |
| AQ342. 01/04 | 956,00 |
| 15/18/20 | 956,00 |
| AQ343. 01/04 | 956,00 |
| 15/18/20 | 956,00 |



90° angle joining elements (not lit)

90° ceiling corner
(on same plane)
301x301mm





| Code | € |
|---------------------|--------|
| AQ360. 01/04 | 370,00 |
| 15/18/20 | 370,00 |



Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 Bracket for fixing to ceiling is included: 1 for 1176 mm lenght - 2 for 2352 mm lenght.
 End caps has to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.








Curved direct emission elements

| Radius | Alpha | W | CRI | Beam | Flux | CCT | Code | € |
|---------|-------|--------|--------|--------|-------------|-------------|-------------|--------|
| 561 mm* | 60° | 17W | 90 | F 24° | 839lm | 2700K | AQ608.01/04 | 668,00 |
| | | | | | | | 15/18/20 | 668,00 |
| | | | | | | 3000K | AQ603.01/04 | 668,00 |
| | | | | | | | 15/18/20 | 668,00 |
| | | | | | | 4000K | AQ605.01/04 | 668,00 |
| | | | | | | | 15/18/20 | 668,00 |
| | | XF 62° | 777lm | 2700K | AQ609.01/04 | 668,00 | | |
| | | | | | 15/18/20 | 668,00 | | |
| | 3000K | | | | AQ604.01/04 | 668,00 | | |
| | | | | | 15/18/20 | 668,00 | | |
| | 4000K | | | | AQ606.01/04 | 668,00 | | |
| | | | | | 15/18/20 | 668,00 | | |
| 90° | 25W | 90 | F 24° | 839lm | 2700K | AQ618.01/04 | 688,00 | |
| | | | | | | 15/18/20 | 688,00 | |
| | | | | | 3000K | AQ613.01/04 | 688,00 | |
| | | | | | | 15/18/20 | 688,00 | |
| | | | | | 4000K | AQ615.01/04 | 688,00 | |
| | | | | | | 15/18/20 | 688,00 | |
| | | XF 62° | 777lm | 2700K | AQ619.01/04 | 688,00 | | |
| | | | | | 15/18/20 | 688,00 | | |
| | 3000K | | | | AQ614.01/04 | 688,00 | | |
| | | | | | 15/18/20 | 688,00 | | |
| | 4000K | | | | AQ616.01/04 | 688,00 | | |
| | | | | | 15/18/20 | 688,00 | | |
| 750 mm* | 45° | 17W | 90 | F 24° | 839lm | 2700K | AQ628.01/04 | 678,00 |
| | | | | | | | 15/18/20 | 678,00 |
| | | | | | | 3000K | AQ623.01/04 | 678,00 |
| | | | | | | | 15/18/20 | 678,00 |
| | | | | | | 4000K | AQ625.01/04 | 678,00 |
| | | | | | | | 15/18/20 | 678,00 |
| | | XF 62° | 777lm | 2700K | AQ629.01/04 | 678,00 | | |
| | | | | | 15/18/20 | 678,00 | | |
| | 3000K | | | | AQ624.01/04 | 678,00 | | |
| | | | | | 15/18/20 | 678,00 | | |
| | 4000K | | | | AQ626.01/04 | 678,00 | | |
| | | | | | 15/18/20 | 678,00 | | |
| 90° | 34W | 90 | F 24° | 1678lm | 2700K | AQ638.01/04 | 708,00 | |
| | | | | | | 15/18/20 | 708,00 | |
| | | | | | 3000K | AQ633.01/04 | 708,00 | |
| | | | | | | 15/18/20 | 708,00 | |
| | | | | | 4000K | AQ635.01/04 | 708,00 | |
| | | | | | | 15/18/20 | 708,00 | |
| | | XF 62° | 1555lm | 2700K | AQ639.01/04 | 708,00 | | |
| | | | | | 15/18/20 | 708,00 | | |
| | 3000K | | | | AQ634.01/04 | 708,00 | | |
| | | | | | 15/18/20 | 708,00 | | |
| | 4000K | | | | AQ636.01/04 | 708,00 | | |
| | | | | | 15/18/20 | 708,00 | | |



















Each linear, angle and curved elements are provided with mechanical and electrical joints, and instalation accessories.
 Bracket for fixing to ceiling is included: 1 for 1176 mm lenght - 2 for 2352 mm lenght.
 End caps has to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.

Accessories

| | | Code | € | | | Code | € |
|---|---|---------------------------------|---------------|---|---|---------------------|-------|
|  | Insulating spacer (1 pcs) between modules powered by differents power supply | AQ352. 01/04 15/18/20 | 16,00 o.d. |  | Sharping kit L=1176mm (2 louvers - 1 intermediate cover - 2 end covers) | AQ260. 01/04 | 42,00 |
|  | End caps (2 pcs) | AQ350. 01/04 15/18/20 | 32,00 o.d. |  | Sharping kit L=2352mm (4 louvers - 3 intermediate cover - 2 end covers) | AQ261. 01/04 | 65,00 |
|  | Transition cap track - diffusing track- sharpening diffusing - sharpening | AQ394. 01/04 15/18/20 | 16,00 o.d. |  | 90° angle cover (2 pcs) | AQ262. 01/04 | 20,00 |
| | | | |  | Louver for curved elements R=561mm (1pc) | AQ910. 01/04 | o.d. |
| | | | | | Louver for curved elements R=750mm (order 1pc for 45°, 2 pcs for 90°) | AQ911. 01/04 | o.d. |
| | | | | | Flexible cover 10m | AQ920. 01/04 | o.d. |


Power supply

| | | Undimmable | | Dimmable DALI | | | |
|---|---|---------------------|--------|---|--|---------------------|--------|
| | | Code | € | Code | € | | |
|  | 240W Recessed power supply kit for ceiling modules 230VAC-48VDC IP20  396x195x112H | AQ17801 | 366,00 |  | 240W Recessed power supply kit for ceiling modules 230VAC-48VDC IP20  396x195x112H | AQ16801 | 495,00 |
|  | 240W Ceiling power supply kit for ceiling modules 230VAC-48VDC 240W IP20  351x61x111H | AQ173. 01/04 | 401,00 |  | 240W Ceiling power supply kit for ceiling modules 230VAC-48VDC IP20  321x91x111H | AQ172. 01/04 | 530,00 |
|  | 150W Ceiling power supply kit for ceiling modules 230VAC-48VDC 240W IP20  351x61x111H | AQ179. 01/04 | 338,00 |  | 150W Ceiling power supply kit for ceiling modules 230VAC-48VDC IP20  321x91x111H | AQ177. 01/04 | 442,00 |
|  | 240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18000 | 185,00 |  | DALI to DALI-Selv Interface 103x67x21H | AQ18200 | 120,00 |
|  | 150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H | AQ18100 | 100,00 |  | 240W Remote box power supply kit 230VAC-48VDC IP20  | AQ16000 | 530,00 |



A.24 circular stand-alone



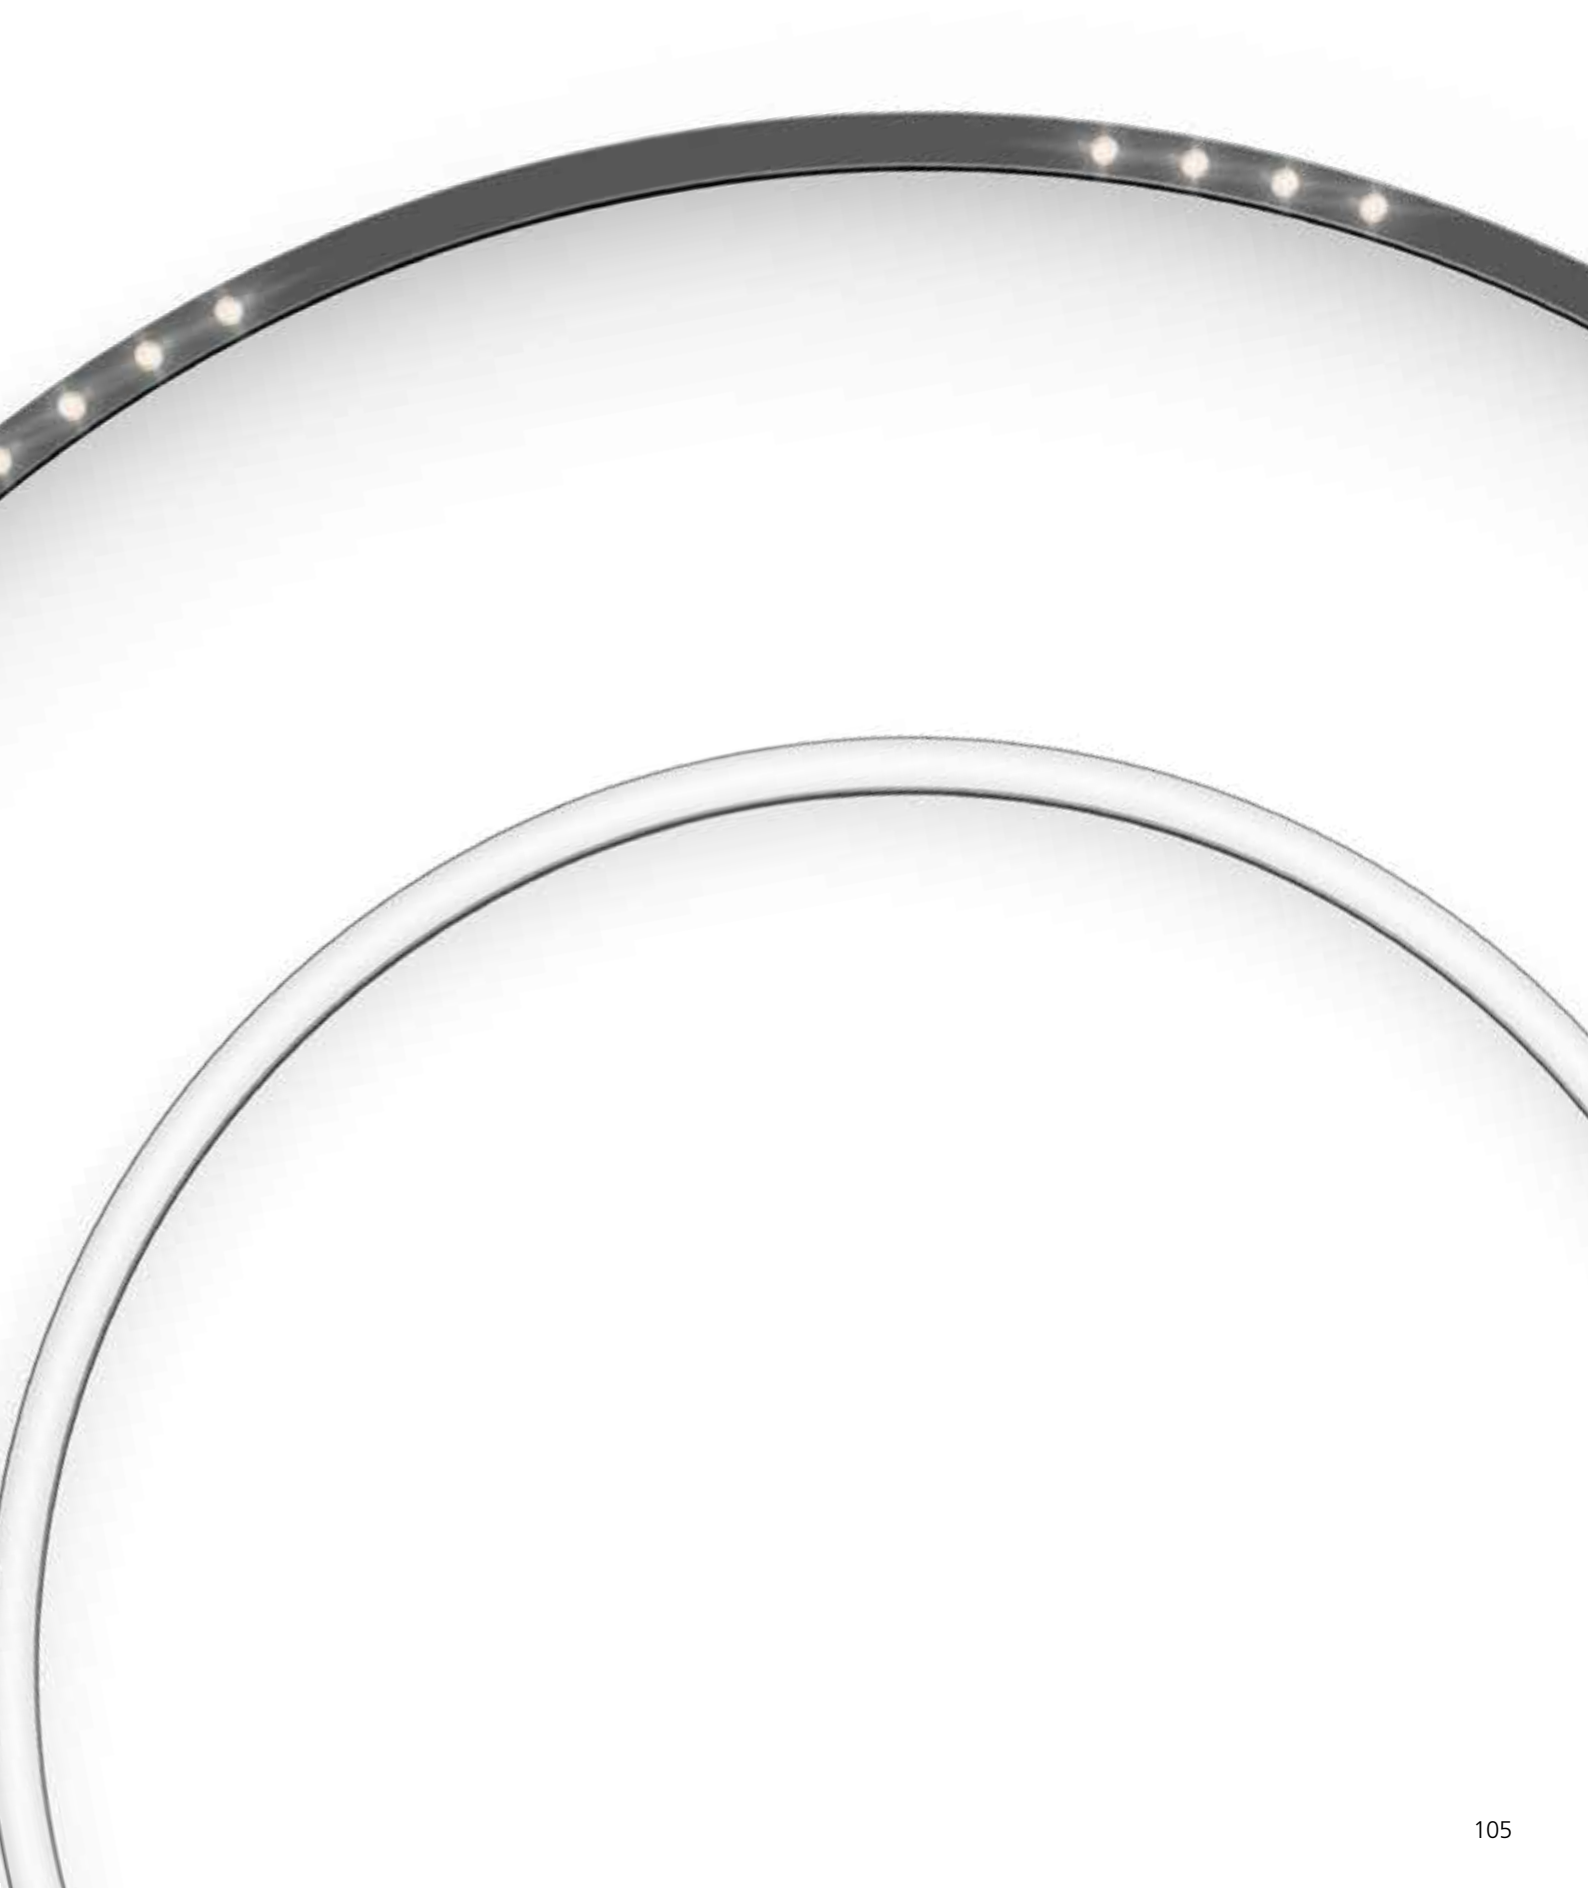











A.24 Stand-alone circular diffused emission

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| White | Black | Brushed Silver | Brushed Copper | Brushed Bronze | 220/240Vac 50/60Hz electronic driver included. Uses 1 DALI addresses. |  | IP20 ⊕ MacAdam 2SDCM Life L70 (6K) 50000h |
|  |  |  |  |  | | | |
| 01 | 04 | 15 | 18 | 20 | | | |
| Fast delivery | | Delivery time on demand | | | | | |


Recessed

Direct emission

| Ø | W | CRI | Flux | CCT |
|---------|------|-----|--------|-------|
| 1122 mm | 102W | 80 | 7124lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| 1500 mm | 136W | 80 | 9499lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |

Dimmable DALI

| Code | € |
|----------------|----------|
| AQ54401 | 1.750,00 |
| AQ54001 | 1.750,00 |
| AQ54101 | 1.750,00 |
| AQ55401 | 1.950,00 |
| AQ55001 | 1.950,00 |
| AQ55101 | 1.950,00 |




Suspension

Direct emission

| Ø | W | CRI | Flux | CCT |
|---------|------|-----|--------|-------|
| 1122 mm | 102W | 80 | 7124lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| 1500 mm | 136W | 80 | 9499lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |

Dimmable DALI

| Code | € |
|---------------------|----------|
| AQ744. 01/04 | 1.650,00 |
| 15/18/20 | 1.650,00 |
| AQ740. 01/04 | 1.650,00 |
| 15/18/20 | 1.650,00 |
| AQ741. 01/04 | 1.650,00 |
| 15/18/20 | 1.650,00 |
| AQ754. 01/04 | 1.850,00 |
| 15/18/20 | 1.850,00 |
| AQ750. 01/04 | 1.850,00 |
| 15/18/20 | 1.850,00 |
| AQ751. 01/04 | 1.850,00 |
| 15/18/20 | 1.850,00 |



Ø1122 / 1500

154

Ceiling

Direct emission

| Ø | W | CRI | Flux | CCT |
|---------|------|-----|--------|-------|
| 1122 mm | 102W | 80 | 7124lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |
| 1550 mm | 136W | 80 | 9499lm | 2700K |
| | | | | 3000K |
| | | | | 4000K |

Dimmable DALI

| Code | € |
|---------------------|----------|
| AQ644. 01/04 | 1.750,00 |
| 15/18/20 | 1.750,00 |
| AQ640. 01/04 | 1.750,00 |
| 15/18/20 | 1.750,00 |
| AQ641. 01/04 | 1.750,00 |
| 15/18/20 | 1.750,00 |
| AQ654. 01/04 | 1.950,00 |
| 15/18/20 | 1.950,00 |
| AQ650. 01/04 | 1.950,00 |
| 15/18/20 | 1.950,00 |
| AQ651. 01/04 | 1.950,00 |
| 15/18/20 | 1.950,00 |

Ceiling and Suspension diffusing optional accessory

To use for recessing a canopy of ceiling or suspension stand-alone.

For Stand Alone Ø 1122
For Stand Alone Ø 1500

Dimmable DALI

| Code | € |
|----------------|------|
| AQ94000 | o.d. |
| AQ64100 | o.d. |

A.24 Stand-alone circular sharpening emission

| | | | | |
|-------------|-------------|----------------------|----------------------|----------------------|
| White 01 | Black 04 | Brushed Silver 15 | Brushed Copper 18 | Brushed Bronze 20 |
|-------------|-------------|----------------------|----------------------|----------------------|

220/240Vac 50/60Hz electronic driver included.
Sharpening kit (louvers and covers for curved elements) has to be ordered separately.
*Uses 1 DALI address
** Uses 2 DALI addresses




IP20
⊕
MacAdam 2SDCM
Life L70 (6K) 50000h

Recessed

| Direct emission | | | | | |
|-----------------|------|-----|-------|--------|-------|
| Ø | W | CRI | Beam | Flux | CCT |
| 1122 mm* | 50W | 90 | F 24° | 3356lm | 2700K |
| | | | | | 3000K |
| | | | | 3576lm | 4000K |
| 1500 mm** | 100W | 90 | F 24° | 6713lm | 2700K |
| | | | | | 3000K |
| | | | | 7152lm | 4000K |


| Dimmable DALI | |
|---------------|----------|
| Code | € |
| AQ545. 01/04 | 1.900,00 |
| AQ542. 01/04 | 1.900,00 |
| AQ543. 01/04 | 1.900,00 |
| AQ555. 01/04 | 2.100,00 |
| AQ552. 01/04 | 2.100,00 |
| AQ553. 01/04 | 2.100,00 |



Suspension

| Direct emission | | | | | |
|-----------------|------|-----|-------|--------|-------|
| Ø | W | CRI | Beam | Flux | CCT |
| 1122 mm* | 50W | 90 | F 24° | 3356lm | 2700K |
| | | | | | 3000K |
| | | | | 3576lm | 4000K |
| 1500 mm** | 100W | 90 | F 24° | 6713lm | 2700K |
| | | | | | 3000K |
| | | | | 7152lm | 4000K |


| Dimmable DALI | |
|---------------|----------|
| Code | € |
| AQ745. 01/04 | 1.800,00 |
| 15/18/20 | 1.800,00 |
| AQ742. 01/04 | 1.800,00 |
| 15/18/20 | 1.800,00 |
| AQ743. 01/04 | 1.800,00 |
| 15/18/20 | 1.800,00 |
| AQ755. 01/04 | 2.000,00 |
| 15/18/20 | 2.000,00 |
| AQ752. 01/04 | 2.000,00 |
| 15/18/20 | 2.000,00 |
| AQ753. 01/04 | 2.000,00 |
| 15/18/20 | 2.000,00 |



Ceiling

| Direct emission | | | | | |
|-----------------|------|-----|-------|--------|-------|
| Ø | W | CRI | Beam | Flux | CCT |
| 1122 mm* | 50W | 90 | F 24° | 3356lm | 2700K |
| | | | | | 3000K |
| | | | | 3576lm | 4000K |
| 1500 mm** | 100W | 90 | F 24° | 6713lm | 2700K |
| | | | | | 3000K |
| | | | | 7152lm | 4000K |

| Dimmable DALI | |
|---------------|----------|
| Code | € |
| AQ645. 01/04 | 1.850,00 |
| 15/18/20 | 1.850,00 |
| AQ642. 01/04 | 1.850,00 |
| 15/18/20 | 1.850,00 |
| AQ643. 01/04 | 1.850,00 |
| 15/18/20 | 1.850,00 |
| AQ655. 01/04 | 2.500,00 |
| 15/18/20 | 2.500,00 |
| AQ652. 01/04 | 2.500,00 |
| 15/18/20 | 2.500,00 |
| AQ653. 01/04 | 2.500,00 |
| 15/18/20 | 2.500,00 |



Sharpening accessories



Sharpening kit R=561mm
(4 louvers - 4 covers)
Sharpening kit R=750mm
(8 louvers - 8 covers)

| Dimmable DALI | |
|---------------|------|
| Code | € |
| AQ930 01/04 | o.d. |
| AQ931 01/04 | o.d. |

Ceiling and Suspension Diffusing optional accessory

To use for recessing a canopy of ceiling or suspension stand-alone.

For Stand Alone Ø 1122
For Stand Alone Ø 1550

| Dimmable DALI | |
|---------------|------|
| Code | € |
| AQ94000 | o.d. |
| AQ64100 | o.d. |



For further information on A.39
visit artemide.com

A.39


is a pure line of light running with high efficiency through space without any interruption with high efficiency.



A.39
is endless and
uninterrupted

Carlotta de Bevilacqua
2017



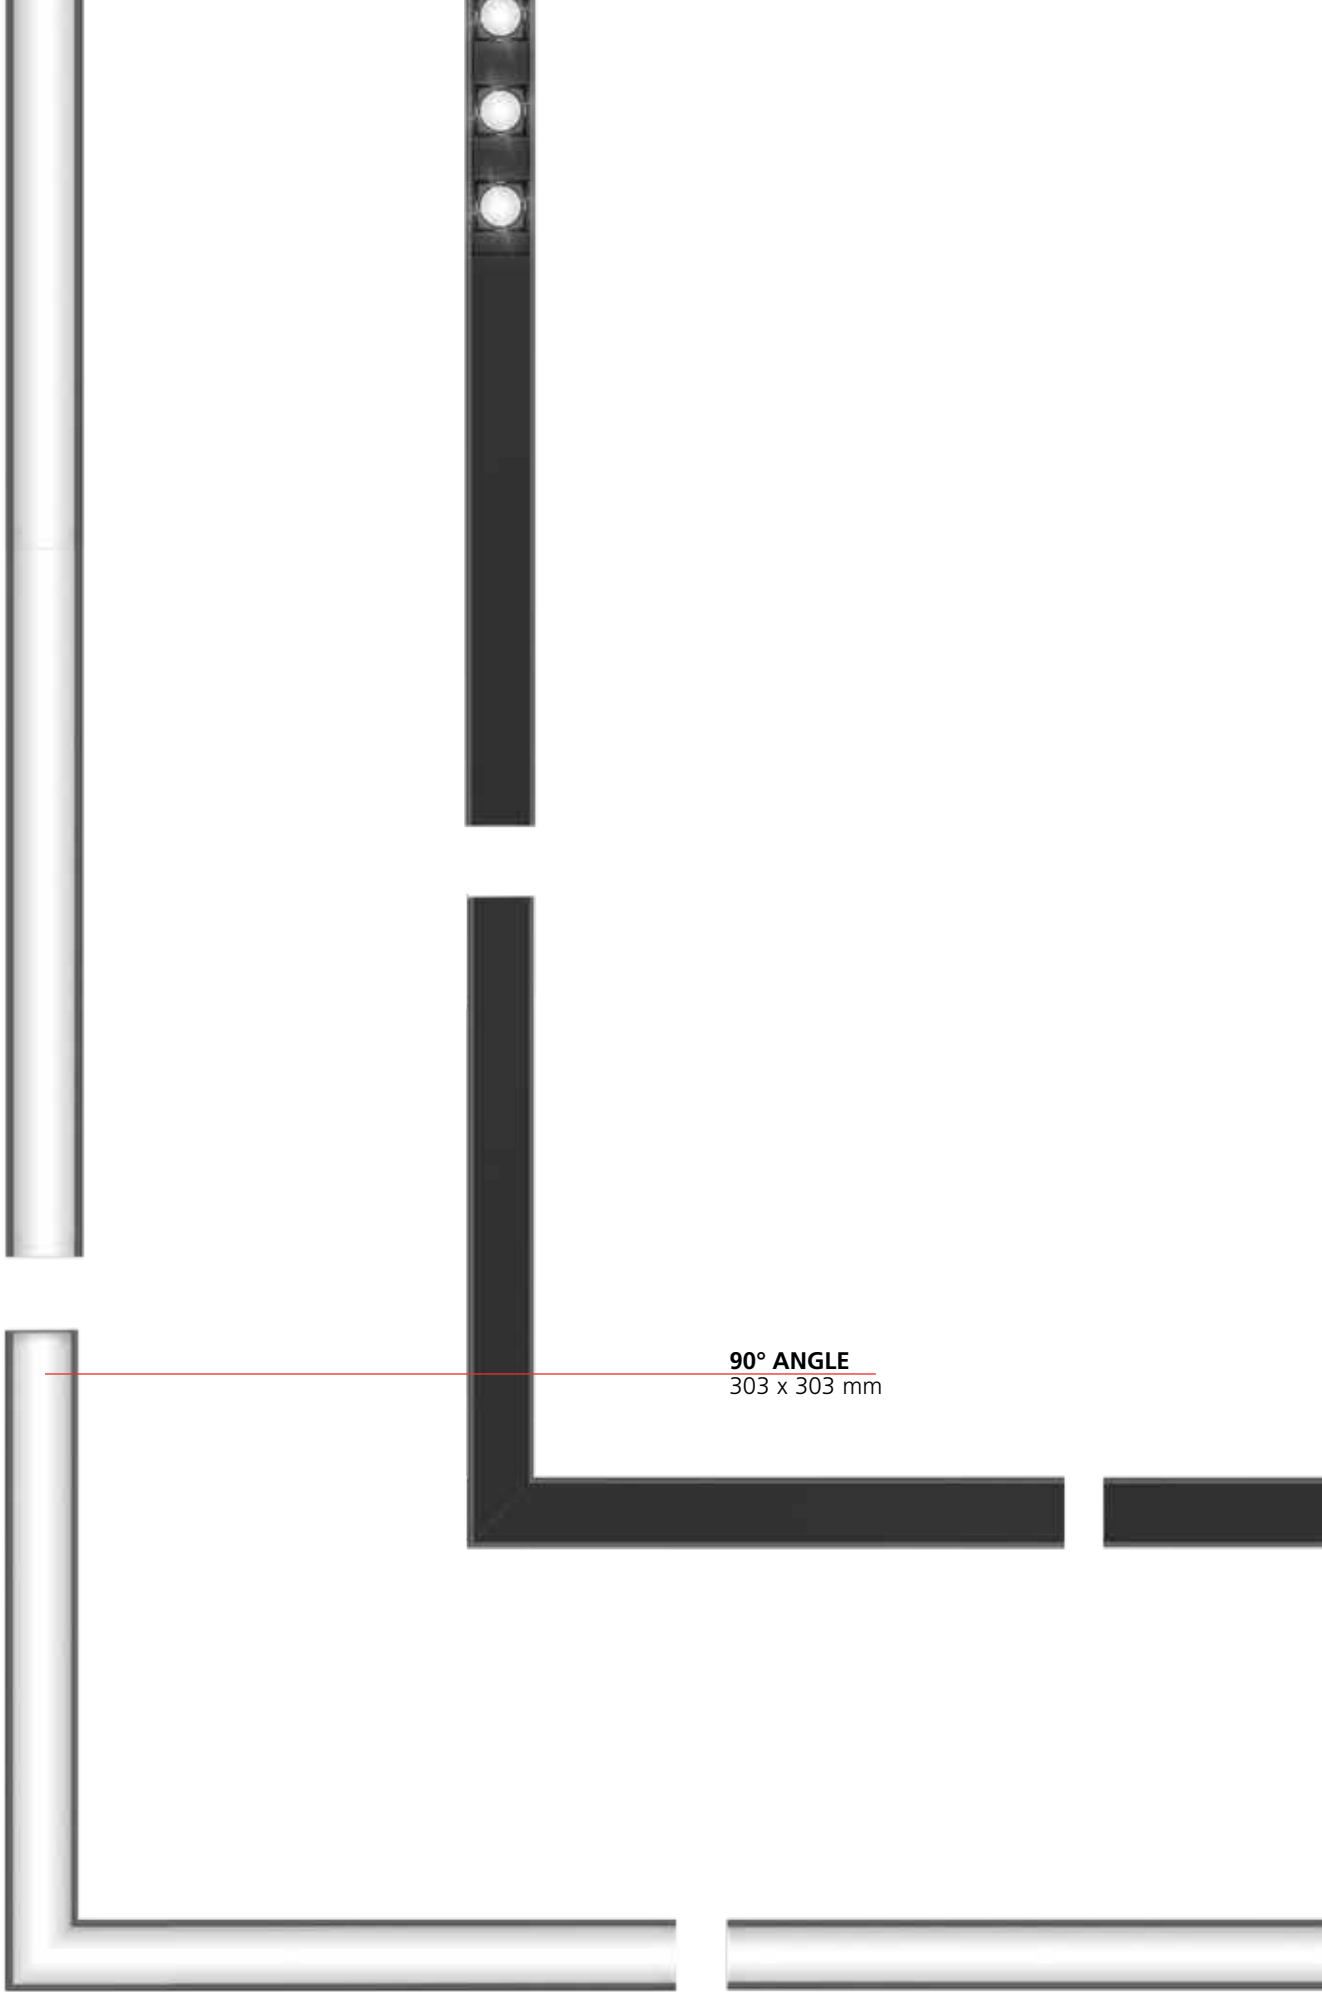

90° ANGLE
303 x 303 mm

A.39

typologies and lighting emission

LINEAR SHARPING
1184 - 2368 mm



LINEAR DIFFUSED
1184 - 1480 - 1776 - 2368 - 2960 mm

**RECESSED
WITH TRIM**

**TRIMLESS
RECESSED**



The diagram shows two cross-sections of space fittings installed in a ceiling. The left fitting, labeled 'RECESSED WITH TRIM', has a metal housing with a decorative trim ring. The right fitting, labeled 'TRIMLESS RECESSED', has a similar metal housing but without the trim ring. Both fittings have a white, tapered, conical body extending downwards. The ceiling surface is shown as a dark grey horizontal line.

A.39 space fittings


CEILING

SUSPENSION

**SUSPENSION WITH
INDIRECT DISTRIBUTION**



A.39 colors



White




01



Silver



05

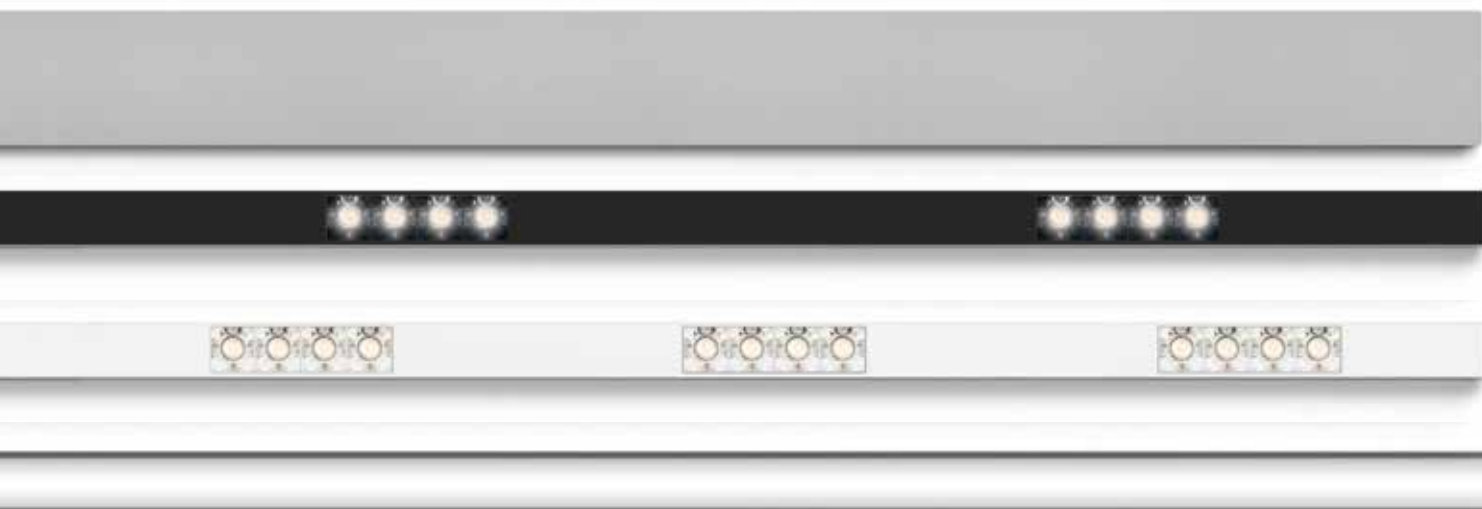

Black



04



A.39

color temperatures

3000K



4000K






A.39 diffused


1. "All in one" construction.
2. A seamless and uniform brightness with no visible junction thanks to a continuous roll diffuser.
3. Continuous roll diffuser up to 50 m.
4. Comfort light emission.





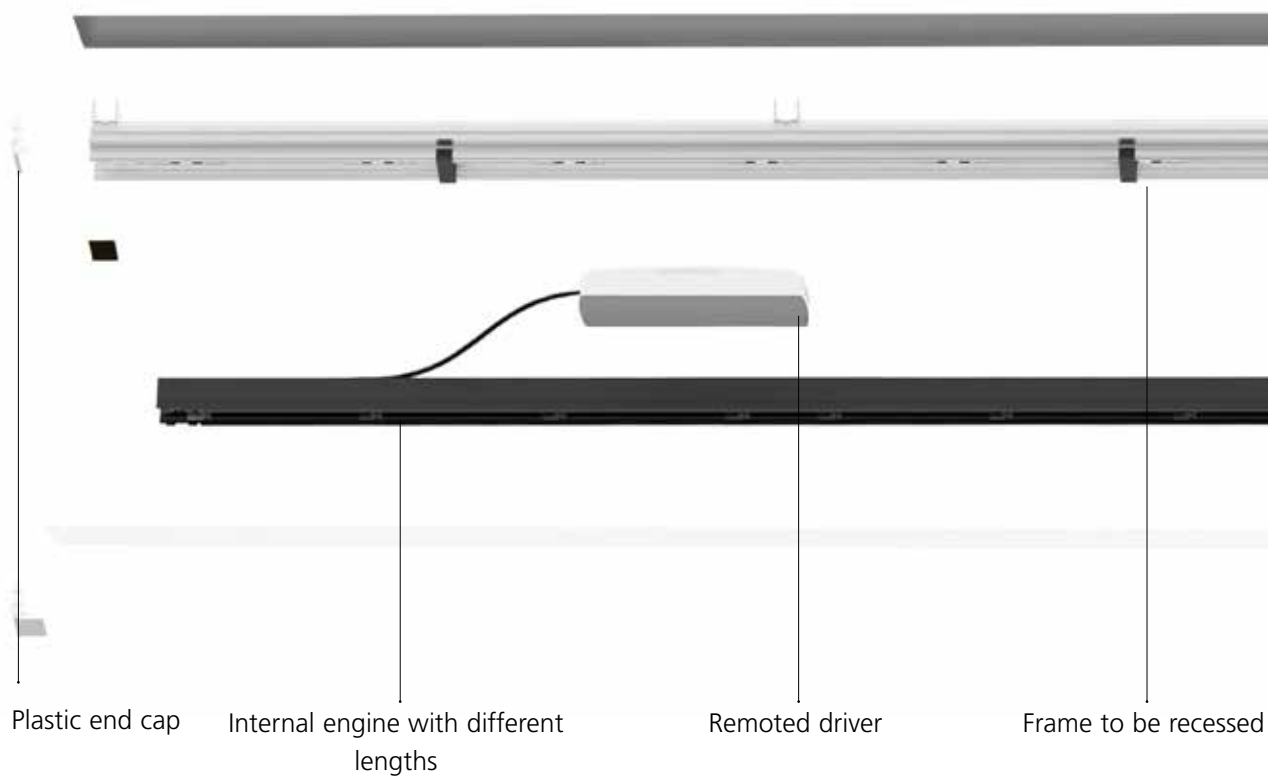

A.39 diffused recessed components

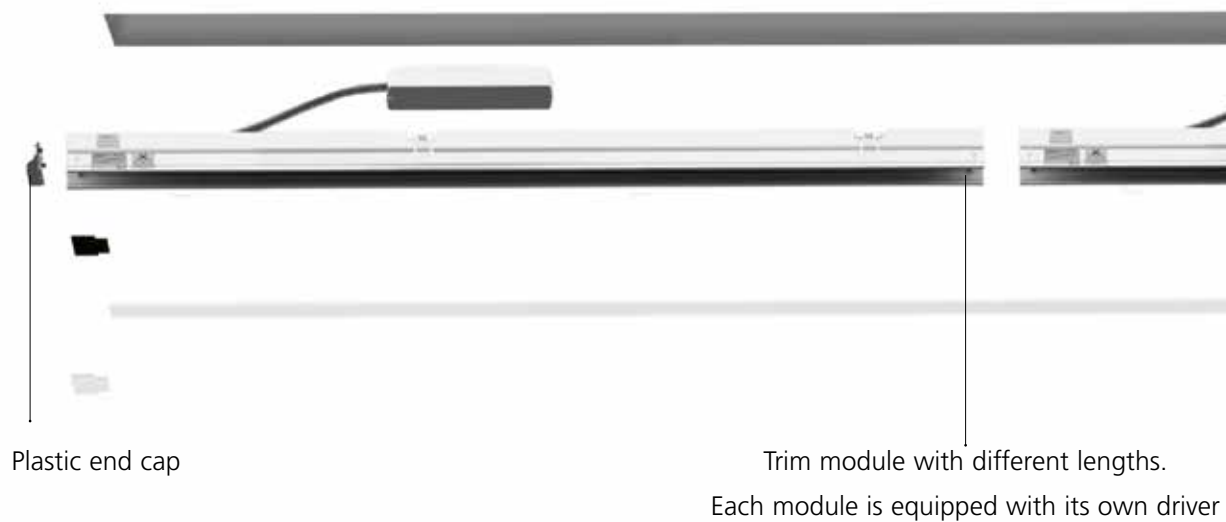

TRIMLESS



Black screen ■

Opaline diffuser available in several preconfigured lengths
(1184, 2368, 2960 mm) or in roll (10, 25, 50 m)

Metal cover


TRIM




Black screen ■

Opaline diffuser available in several preconfigured lengths
(1184, 2368, 2960 mm) or in roll (10, 25, 50 m)


Metal cover

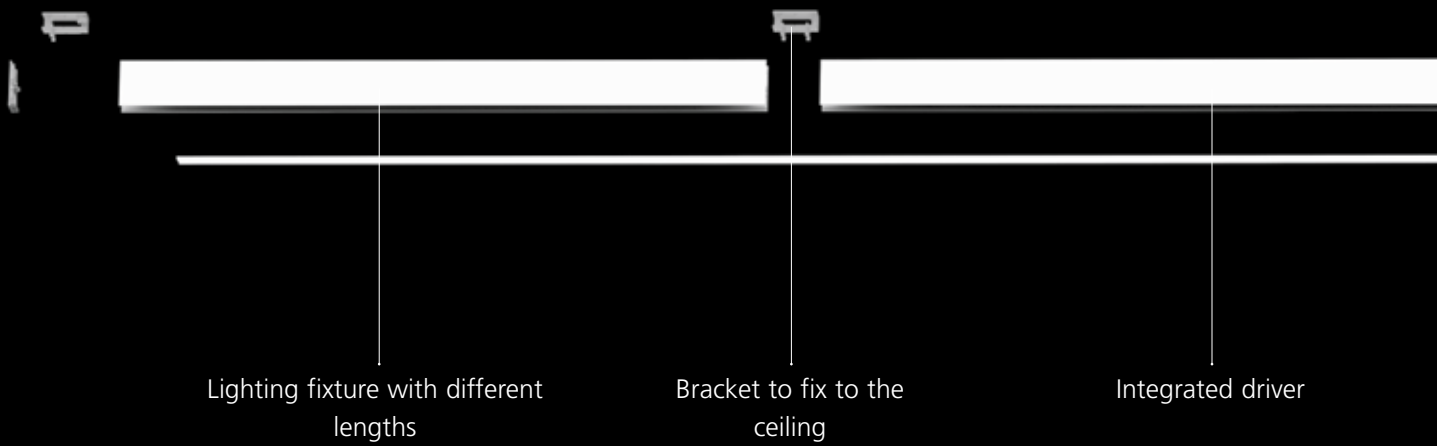


A.39 diffused ceiling, suspension components

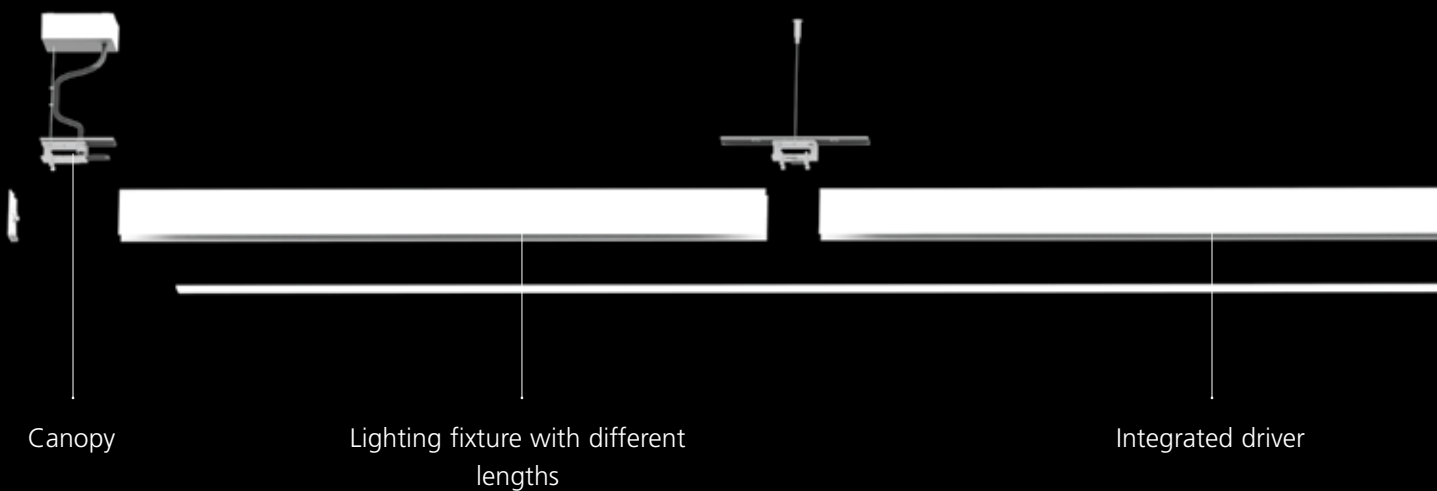

CEILING

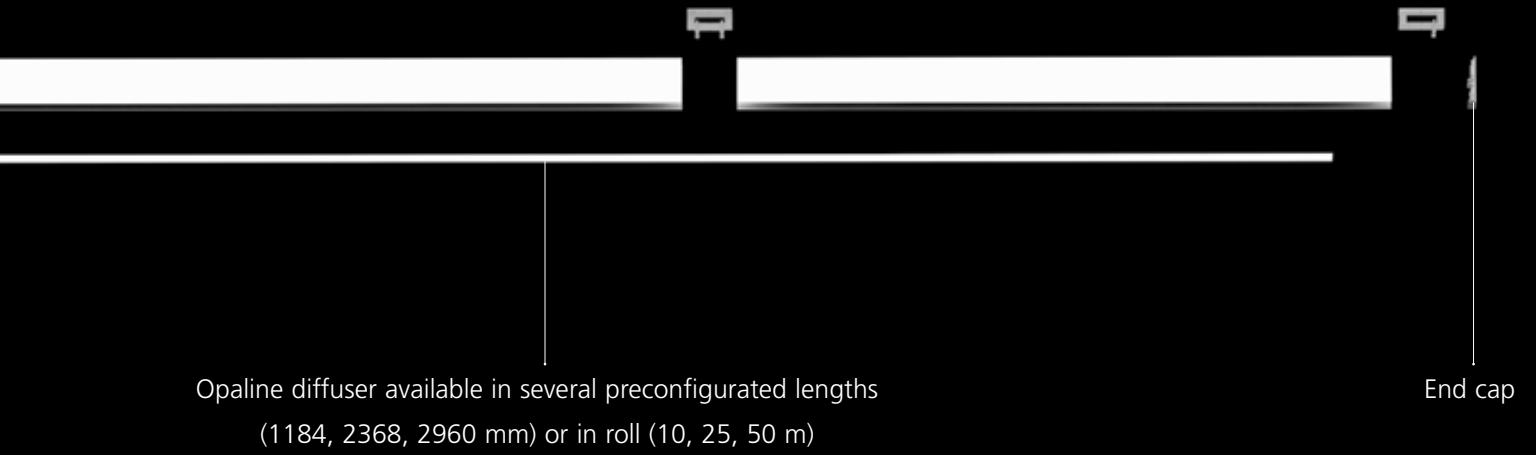


SUSPENSION

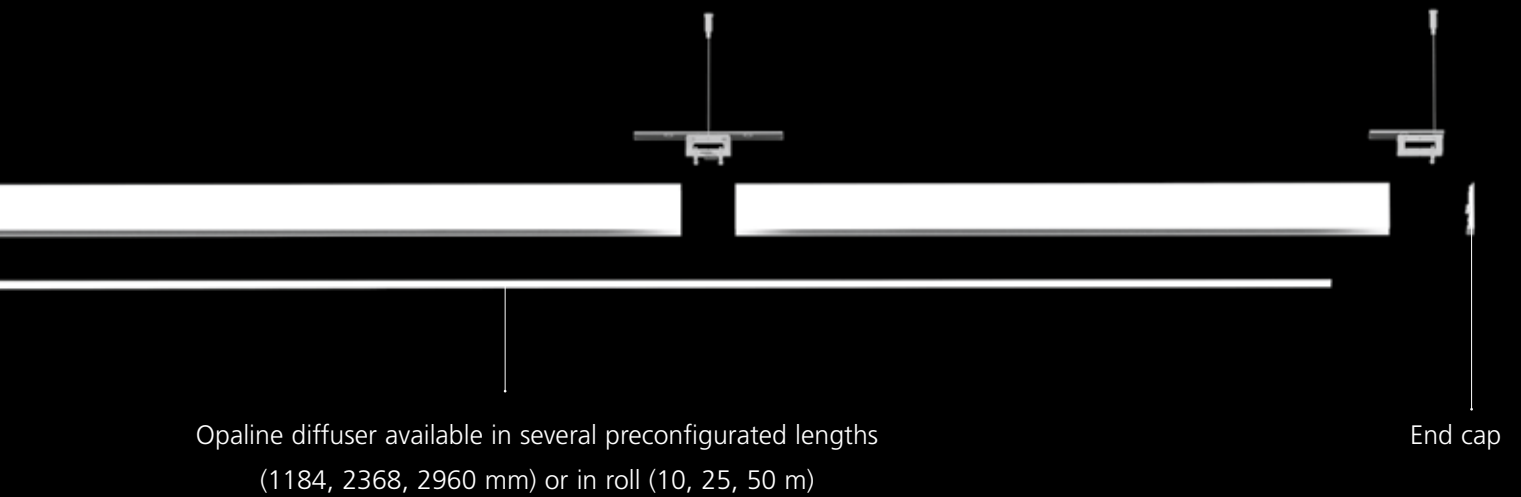

A.39 diffused system modules

| TOTAL LENGTH | 1184 mm | 1482 mm | 1776 mm | 2368 mm | 2960 mm | 2960 - 5000 mm | 5000 - 15000 mm | 15000 - 35000 mm | 50000 mm |
|-----------------------------|---------|---------|---------|---------|---------|----------------|-----------------|------------------|----------|
| TRIM METAL COVER | | | | | | | | | |
| A | ○—————○ | | | | | | | | |
| B | | | | | | | ○———○ | | |
| C | | | | | | | | ○———○ | |
| DIFFUSER | | | | | | | | | |
| 1184 mm | ○———○ | | | | | | | | |
| 2368 mm | | ○—————○ | | | | | | | |
| 2960 mm | | | | | ○———○ | | | | |
| ROLL DIFFUSER | | | | | | | | | |
| 10 m | | | | | | ○—————○ | | | |
| 25 m | | | | | | ○—————○ | | | |
| 50 m | | | | | | ○—————○ | | | |
| TRIMLESS FRAME | | | | | | | | | |
| 1480 mm | ○—————○ | | | | | | | | |
| 4736 mm | | | ○—————○ | | | | | | |
| TRIMLESS METAL COVER | | | | | | | | | |
| C | ○—————○ | | | | | | | | |
| SPECIAL | | | | | | | | | ○———○ |

TRIM - TRIMLESS

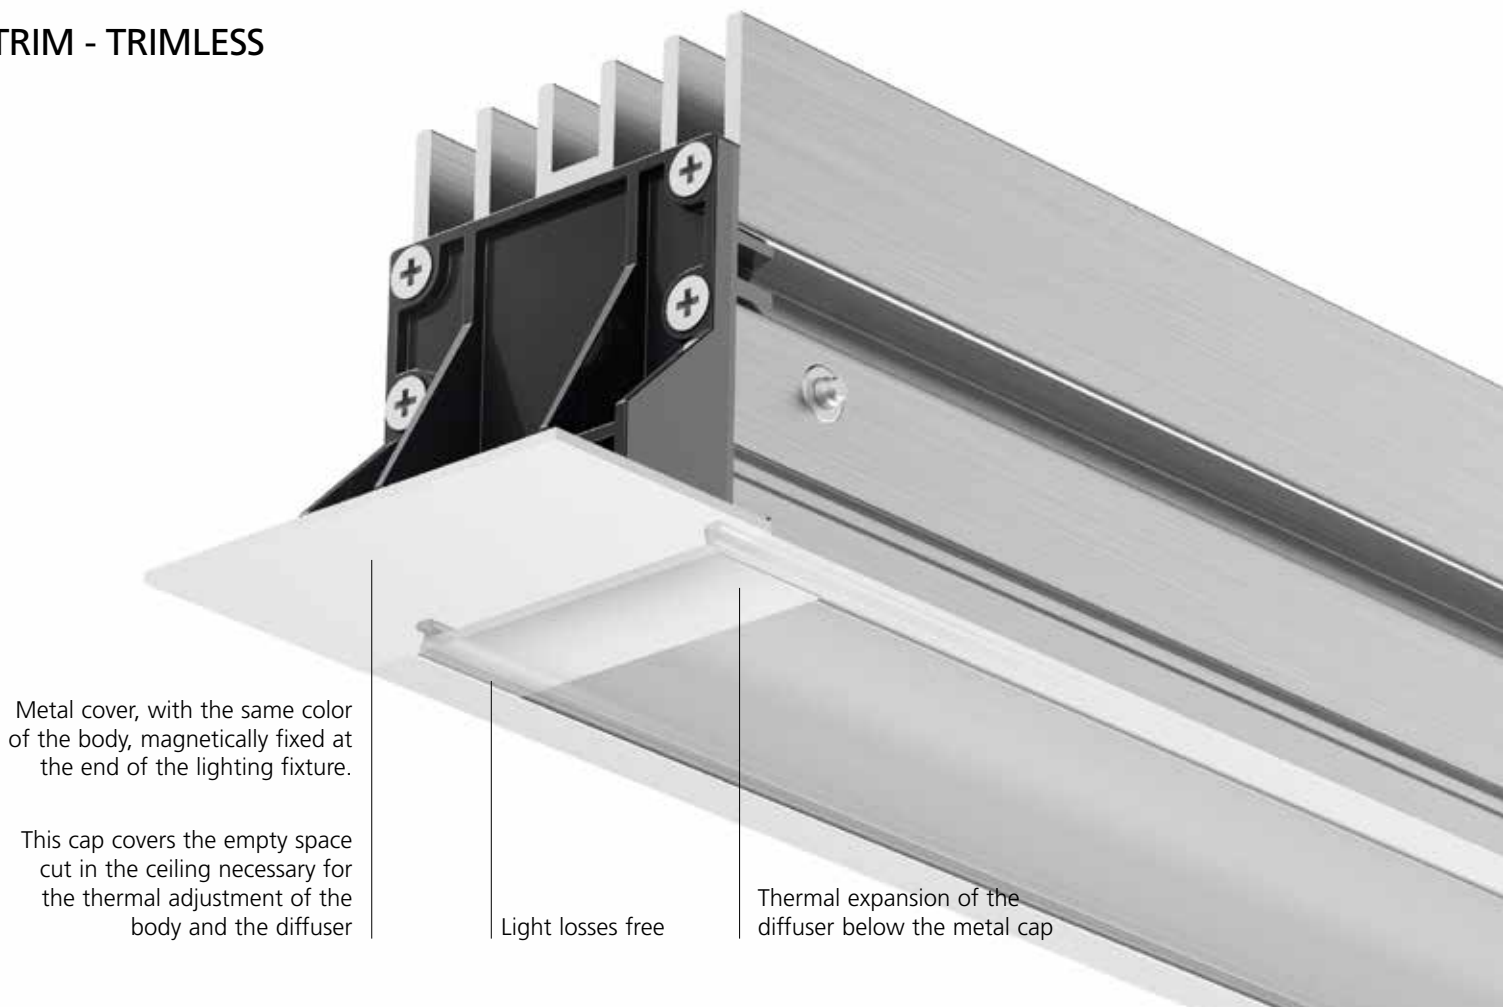


Metal cover, with the same color of the body, magnetically fixed at the end of the lighting fixture.

This cap covers the empty space cut in the ceiling necessary for the thermal adjustment of the body and the diffuser

Light losses free

Thermal expansion of the diffuser below the metal cap


CEILING

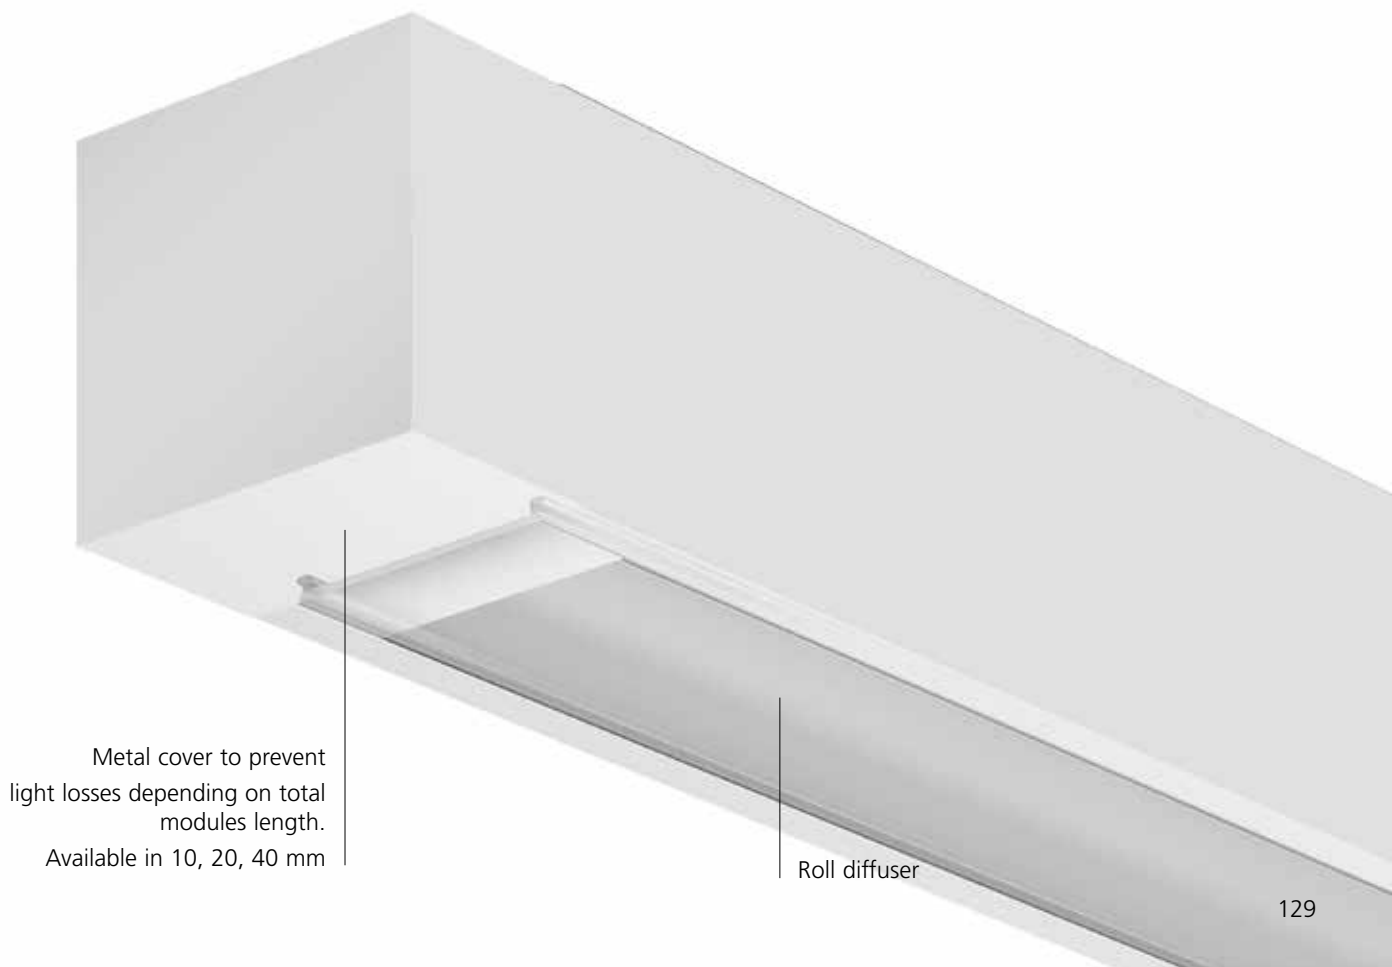

Metal cover to prevent light losses depending on total modules length.
Available in 10, 20, 40 mm

Roll diffuser

A.39 recessed diffused emission





MacAdam 2SDCM
Life L70 (6K) 50000h

IP20

| Trimless | | | | |
|----------|-----|-----|------------------|----------------|
| Length | W | CRI | Flux | CCT |
| 1184 mm | 33W | 80 | 1981lm 2069lm | 3000K 4000K |
| 1482 mm | 41W | 80 | 2476lm 2587lm | 3000K 4000K |
| 1776 mm | 49W | 80 | 2971lm 3041lm | 3000K 4000K |
| 2368 mm | 63W | 80 | 3962lm 4139lm | 3000K 4000K |
| 2960 mm | 81W | 80 | 4952lm 5174lm | 3000K 4000K |

| Undimmable | |
|------------|--------|
| Code | € |
| AT00100 | 230,00 |
| AT00300 | 230,00 |
| AT00500 | 270,00 |
| AT00700 | 270,00 |
| AT02100 | 310,00 |
| AT02300 | 310,00 |
| AT01100 | 375,00 |
| AT01300 | 375,00 |
| AT01500 | 470,00 |
| AT01700 | 470,00 |

| Dimmable DALI | |
|---------------|--------|
| Code | € |
| AT00000 | 250,00 |
| AT00200 | 250,00 |
| AT00400 | 290,00 |
| AT00600 | 290,00 |
| AT02000 | 335,00 |
| AT02200 | 335,00 |
| AT01000 | 398,00 |
| AT01200 | 398,00 |
| AT01400 | 495,00 |
| AT01600 | 495,00 |



| 90° Corner Trimless | | | | |
|---------------------|-----|-----|--------|----------------|
| Length | W | CRI | Flux | CCT |
| 330x330 mm | 17W | 80 | 1043lm | 3000K 4000K |

| Undimmable | |
|------------|--------|
| Code | € |
| AT30500 | 175,00 |
| AT30700 | 175,00 |



| Dimmable DALI | |
|---------------|--------|
| Code | € |
| AT30600 | 195,00 |
| AT30800 | 195,00 |



| Trim | | | | |
|---------|-----|-----|------------------|----------------|
| Length | W | CRI | Flux | CCT |
| 1184 mm | 33W | 80 | 2171lm 2269lm | 3000K 4000K |
| 1482 mm | 41W | 80 | 2714lm 2836lm | 3000K 4000K |
| 1776 mm | 49W | 80 | 3257lm 3403lm | 3000K 4000K |
| 2368 mm | 63W | 80 | 4343lm 4538lm | 3000K 4000K |
| 2960 mm | 81W | 80 | 5429lm 5673lm | 3000K 4000K |

| Undimmable | |
|-----------------|--------|
| Code | € |
| AT051. 01/04/05 | 295,00 |
| AT053. 01/04/05 | 295,00 |
| AT055. 01/04/05 | 330,00 |
| AT057. 01/04/05 | 330,00 |
| AT065. 01/04/05 | 395,00 |
| AT068. 01/04/05 | 395,00 |
| AT061. 01/04/05 | 475,00 |
| AT063. 01/04/05 | 475,00 |
| AT070. 01/04/05 | 575,00 |
| AT072. 01/04/05 | 575,00 |

| Dimmable DALI | |
|-----------------|--------|
| Code | € |
| AT050. 01/04/05 | 320,00 |
| AT052. 01/04/05 | 320,00 |
| AT054. 01/04/05 | 355,00 |
| AT056. 01/04/05 | 355,00 |
| AT064. 01/04/05 | 420,00 |
| AT066. 01/04/05 | 420,00 |
| AT060. 01/04/05 | 498,00 |
| AT062. 01/04/05 | 498,00 |
| AT069. 01/04/05 | 598,00 |
| AT071. 01/04/05 | 598,00 |



| 90° Corner Trim | | | | |
|-----------------|-----|-----|--------|----------------|
| Length | W | CRI | Flux | CCT |
| 303x303 mm | 17W | 80 | 1043lm | 3000K 4000K |

| Undimmable | |
|-----------------|--------|
| Code | € |
| AT300. 01/04/05 | 270,00 |
| AT301. 01/04/05 | 270,00 |

| Dimmable DALI | |
|-----------------|--------|
| Code | € |
| AT302. 01/04/05 | 295,00 |
| AT303. 01/04/05 | 295,00 |

| Opal diffuser in polycarbonate | |
|--------------------------------|--|
| Length | |
| 1184 mm | |
| 2368 mm | |
| 2960 mm | |
| 10000 mm roll | |
| 25000 mm roll | |
| 50000 mm roll | |

| Code | € |
|---------|--------|
| AT10100 | 27,00 |
| AT10200 | 39,00 |
| AT10300 | 45,00 |
| AT10000 | 155,00 |
| AT10800 | 320,00 |
| AT10900 | 598,00 |

| Components | |
|-------------------------------------|--------------------|
| | Length |
| Trimless frame kit | 1488 mm 4736 mm |
| Frame Cap 2x | |
| End Cap 2x | |
| 90° trimless frame kit L=303x303 | |

| Code | € |
|---------|--------|
| AT04000 | 130,00 |
| AT04100 | 330,00 |
| AT09300 | 27,00 |
| AT09301 | 44,00 |
| AT30400 | 105,00 |

| | € |
|----------------------------------|---|
| Trim end cap kit 2x up to 5 m | |
| up to 15 m | |
| up to 35 m | |


| Code | € |
|-----------------|-------|
| AT090. 01/04/05 | 32,00 |
| AT091. 01/04/05 | 32,00 |
| AT092. 01/04/05 | 32,00 |

A.39 suspension, ceiling diffused emission

| Suspension, ceiling direct emission | | | | |
|-------------------------------------|-----|-----|--------|-------|
| Length | W | CRI | Flux | CCT |
| 1184 mm | 34W | 80 | 2070lm | 3000K |
| | | | 2163lm | 4000K |
| 1482 mm | 42W | 80 | 2588lm | 3000K |
| | | | 2704lm | 4000K |
| 2368 mm | 66W | 80 | 4141lm | 3000K |
| | | | 4326lm | 4000K |
| 2960 mm | 82W | 80 | 5176lm | 3000K |
| | | | 5408lm | 4000K |

| Undimmable | | |
|---------------|----------|--------|
| Code | | € |
| AT131. | 01/04/05 | 340,00 |
| AT133. | 01/04/05 | 340,00 |
| AT141. | 01/04/05 | 380,00 |
| AT143. | 01/04/05 | 380,00 |
| AT151. | 01/04/05 | 520,00 |
| AT153. | 01/04/05 | 520,00 |
| AT181. | 01/04/05 | 670,00 |
| AT183. | 01/04/05 | 670,00 |



| Dimmable DALI | | |
|---------------|----------|--------|
| Code | | € |
| AT130. | 01/04/05 | 360,00 |
| AT132. | 01/04/05 | 360,00 |
| AT140. | 01/04/05 | 420,00 |
| AT142. | 01/04/05 | 420,00 |
| AT150. | 01/04/05 | 570,00 |
| AT152. | 01/04/05 | 570,00 |
| AT180. | 01/04/05 | 715,00 |
| AT182. | 01/04/05 | 715,00 |



| Suspension direct + indirect emission | | | | |
|---------------------------------------|--------------|-----------------|-----------------|-------|
| Length | W | CRI | Flux | CCT |
| 1184 mm | 34W direct | 80 | 2070lm direct | 3000K |
| | 23W indirect | | 2956lm indirect | |
| 1482 mm | 42W direct | 80 | 2163lm direct | 4000K |
| | | | 3088lm indirect | |
| | 31W indirect | 2588lm direct | 3000K | |
| | | 3941lm indirect | | |
| 2368 mm | 66W direct | 80 | 2704lm direct | 4000K |
| | | | 4118lm indirect | |
| | 50W indirect | 4141lm direct | 3000K | |
| | | 5912lm indirect | | |
| 2960 mm | 82W direct | 80 | 4326lm direct | 4000K |
| | | | 6177lm indirect | |
| | 67W indirect | 5176lm direct | 3000K | |
| | | 7883lm indirect | | |
| | | | 5408lm direct | 4000K |
| | | | 8236lm indirect | |

| Undimmable | | |
|---------------|----------|--------|
| Code | | € |
| AT191. | 01/04/05 | 470,00 |
| AT193. | 01/04/05 | 470,00 |
| AT221. | 01/04/05 | 540,00 |
| AT223. | 01/04/05 | 540,00 |
| AT231. | 01/04/05 | 790,00 |
| AT233. | 01/04/05 | 790,00 |
| AT241. | 01/04/05 | 990,00 |
| AT243. | 01/04/05 | 990,00 |

| Dimmable DALI | | |
|---------------|----------|----------|
| Code | | € |
| AT190. | 01/04/05 | 490,00 |
| AT192. | 01/04/05 | 490,00 |
| AT220. | 01/04/05 | 570,00 |
| AT222. | 01/04/05 | 570,00 |
| AT230. | 01/04/05 | 950,00 |
| AT232. | 01/04/05 | 950,00 |
| AT240. | 01/04/05 | 1.100,00 |
| AT242. | 01/04/05 | 1.100,00 |



Opal diffuser in polycarbonate

| Length | Code | € |
|---------------|----------------|--------|
| 1184 mm | AT10100 | 29,00 |
| 2368 mm | AT10200 | 43,00 |
| 2960 mm | AT10300 | 45,00 |
| 10000 mm roll | AT10000 | 155,00 |
| 25000 mm roll | AT10800 | 320,00 |
| 50000 mm roll | AT10900 | 598,00 |

Accessories suspension

| | Code | € |
|--|----------------|--------|
| Undimmable Feeding kit including 2 suspension cables (3 poles) | AT10400 | 140,00 |
| Dimmable Feeding kit including 2 suspension cables (5 poles) | AT10500 | 150,00 |
| Mechanical joint including 1 suspension cable | AT09500 | 40,00 |


Accessories ceiling


| | Code | € |
|--------------------------------------|----------------|-------|
| End cap kit 2x | AT094. | 60,00 |
| Ceiling bracket and mechanical joint | AT09501 | 20,00 |
| End ceiling bracket (2 pcs) | AT09502 | 35,00 |

| | | | |
|----------------|--------------|----------|-------|
| End cap kit 2x | AT094 | 01/04/05 | 60,00 |
|----------------|--------------|----------|-------|




A.39 sharpening

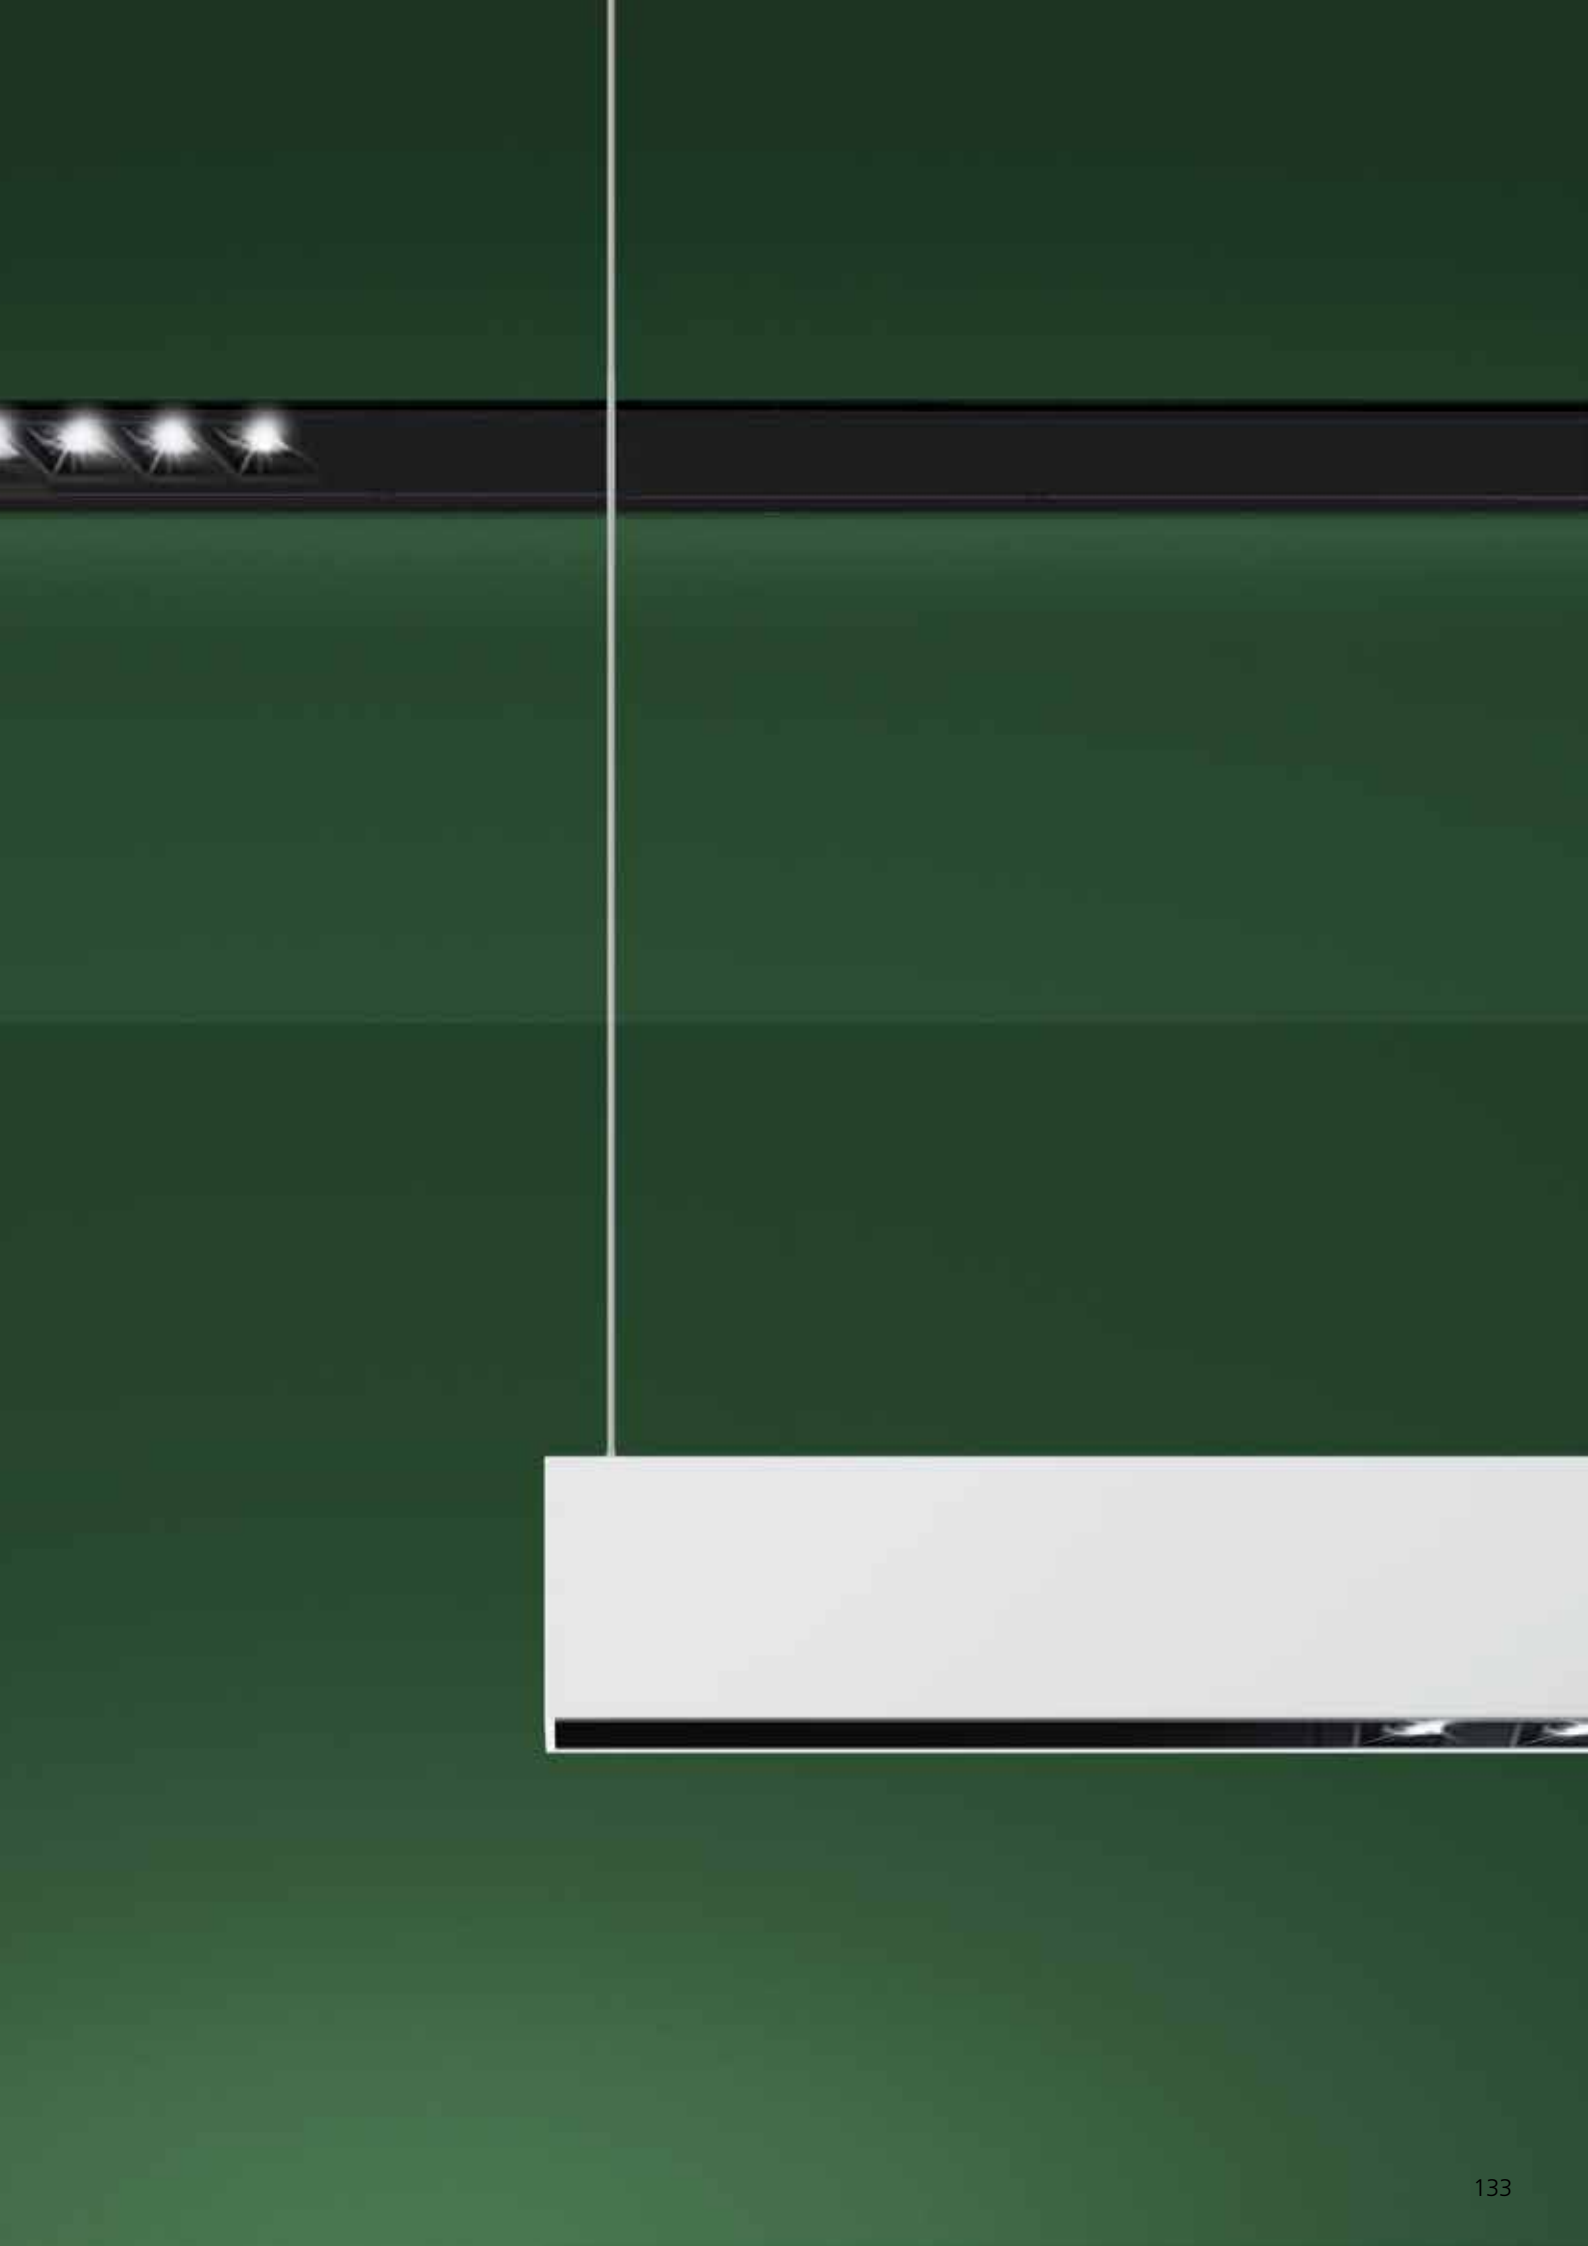


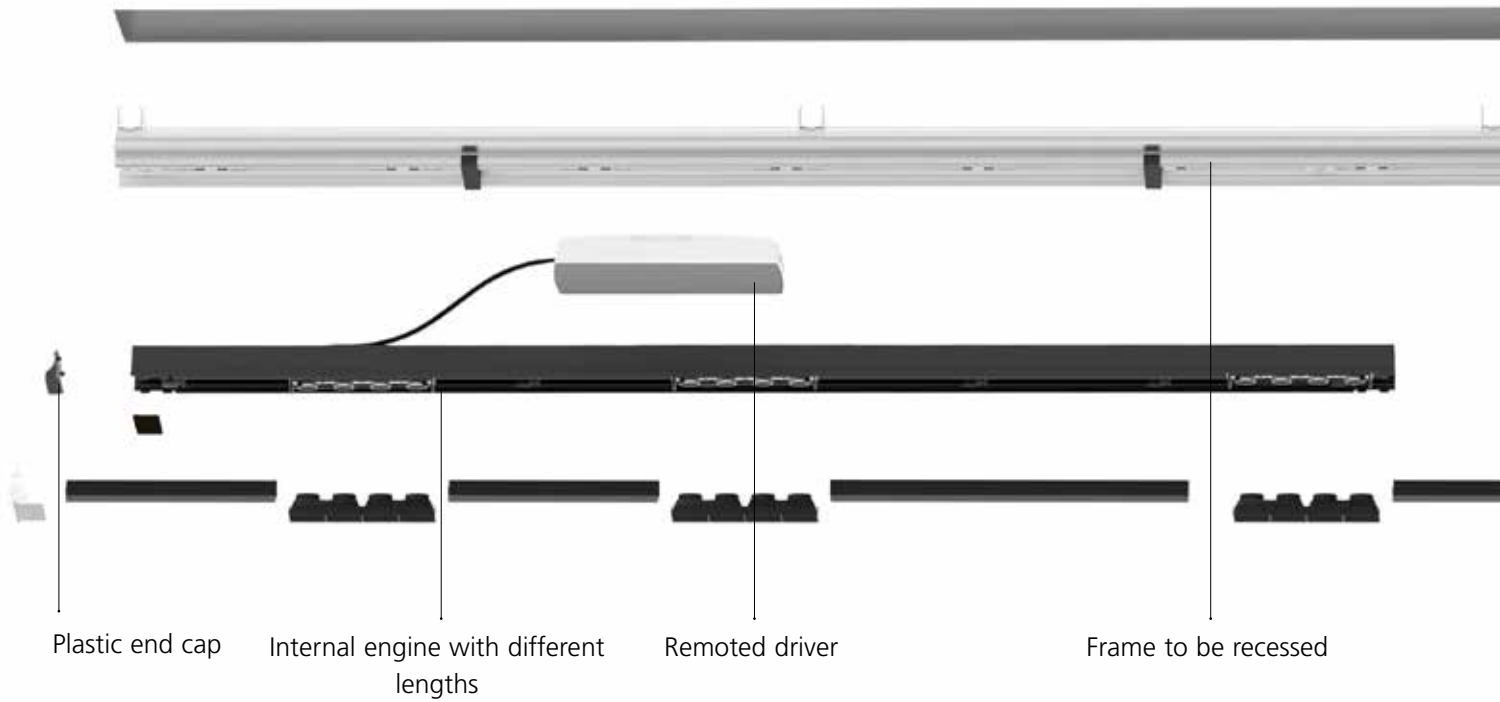


A.39 sharpening recessed components

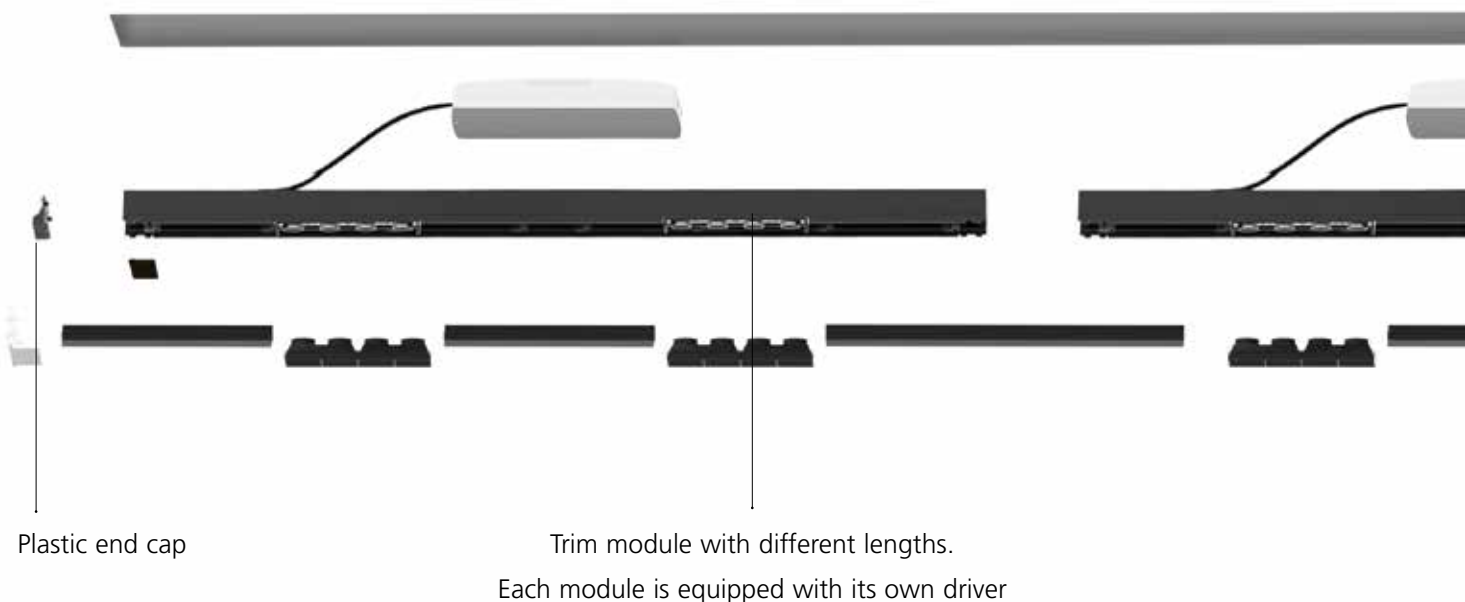


TRIMLESS

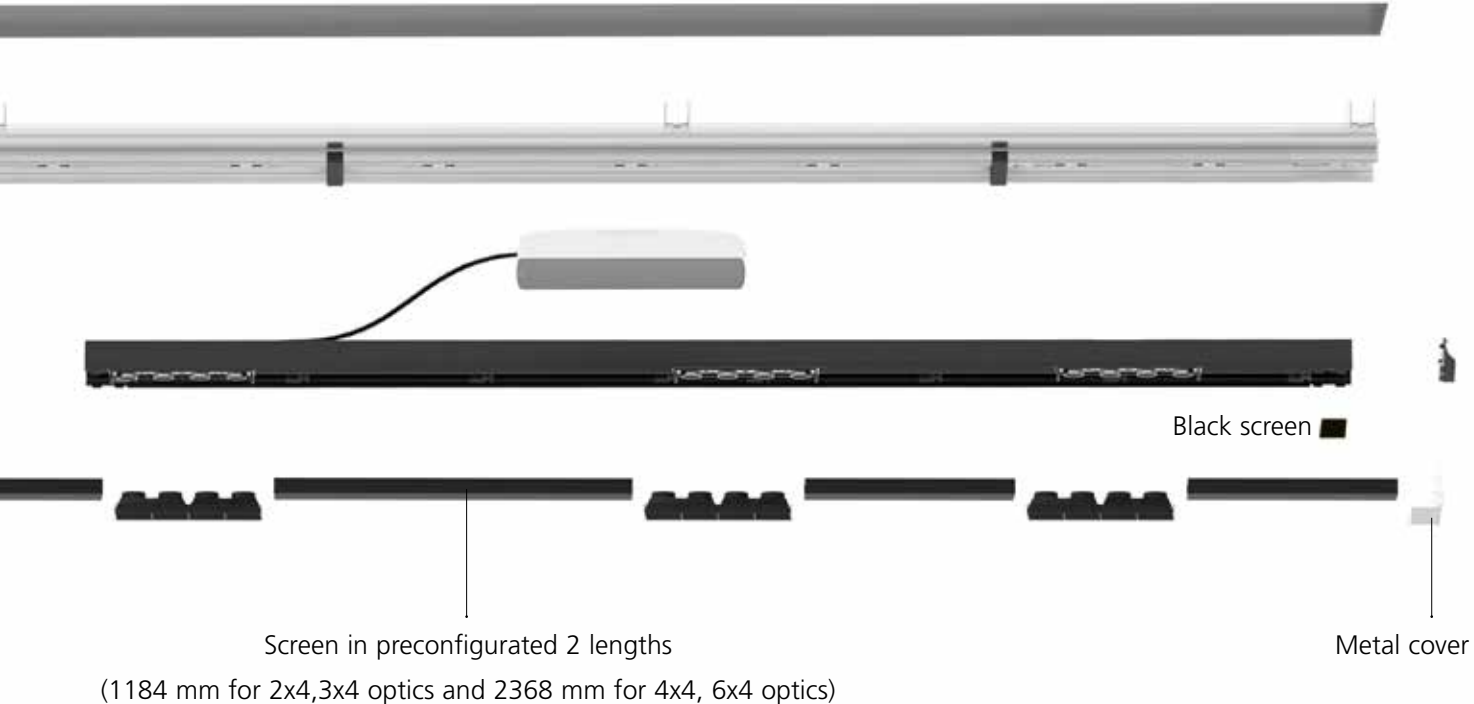


TRIM

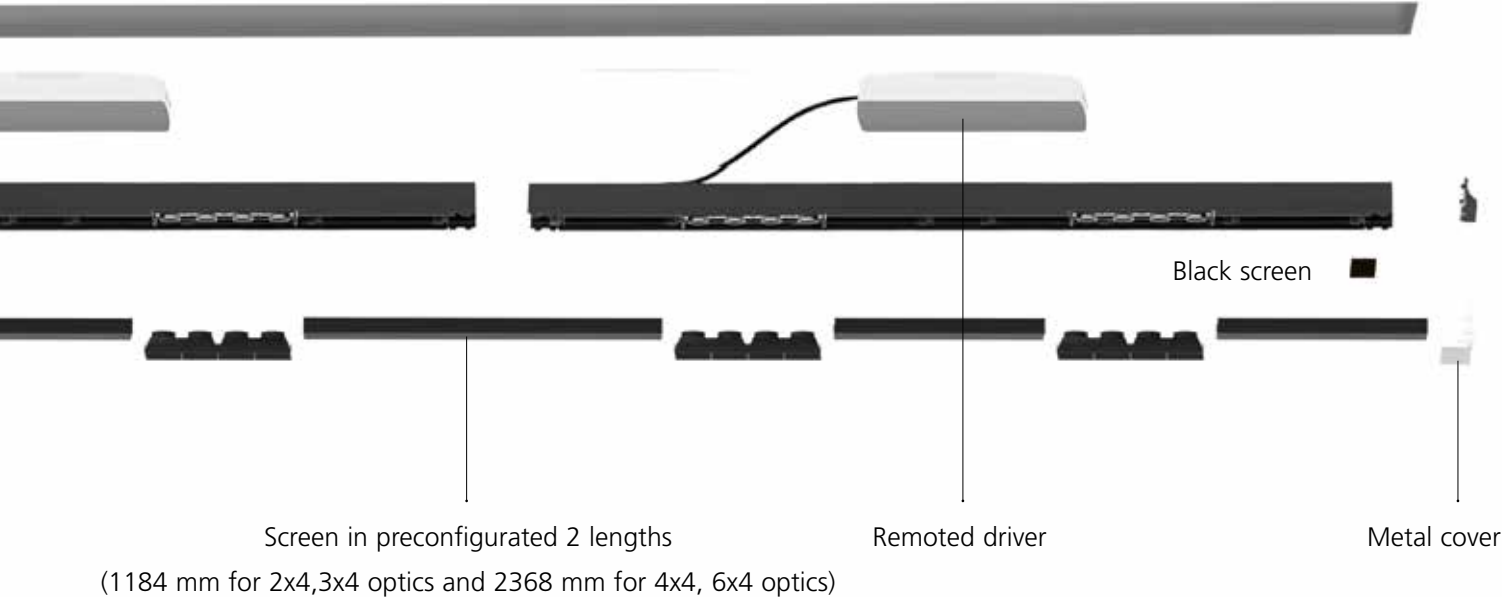


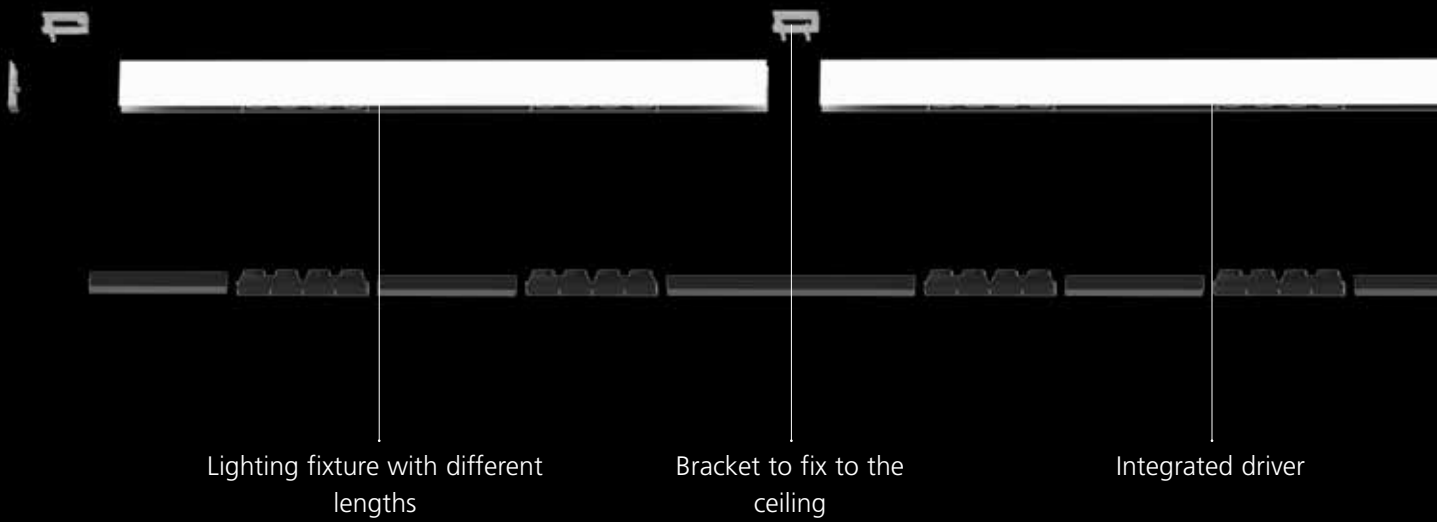


A.39 sharpening ceiling, suspension components

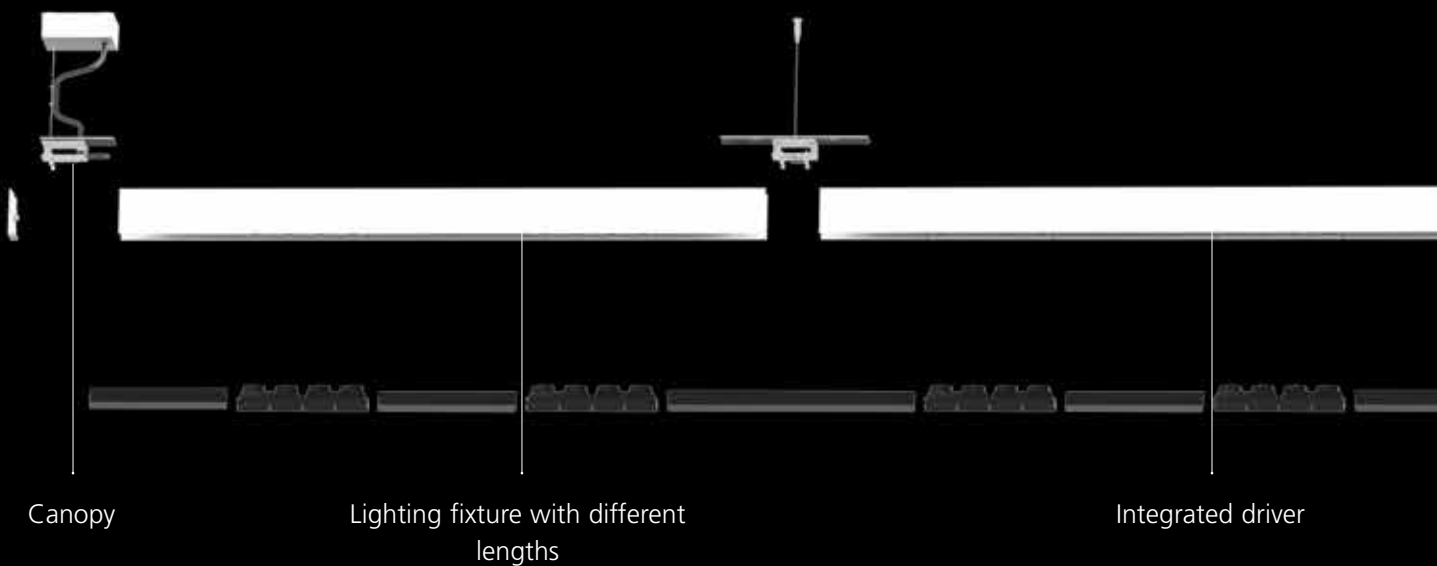


CEILING

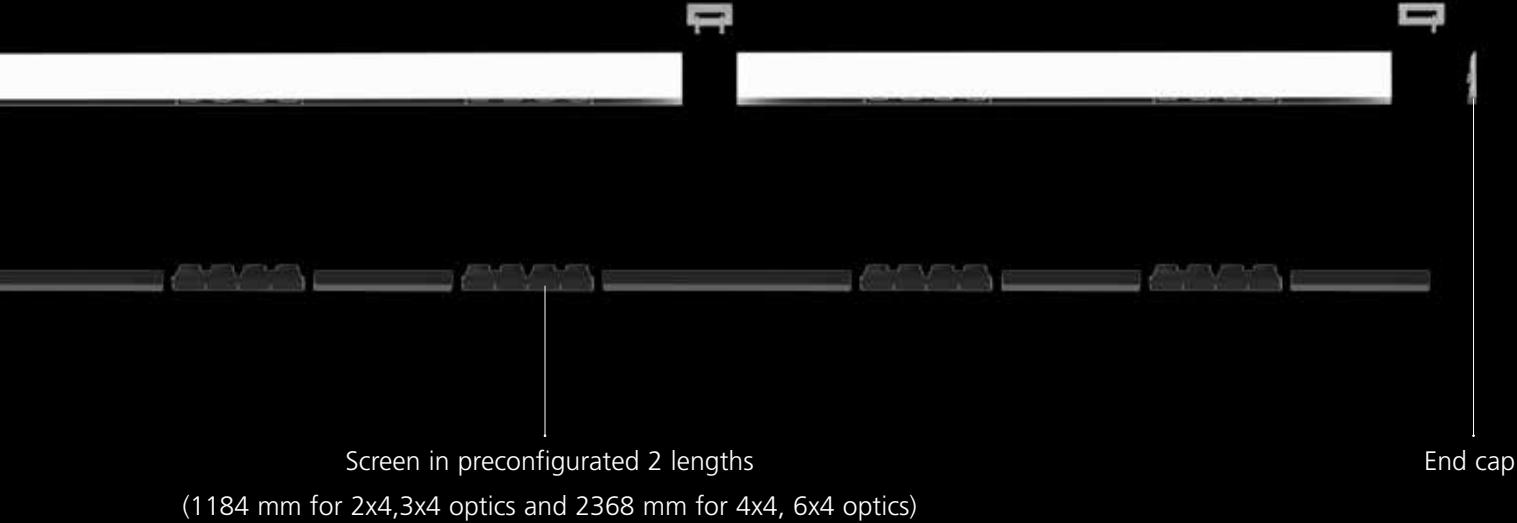

SUSPENSION

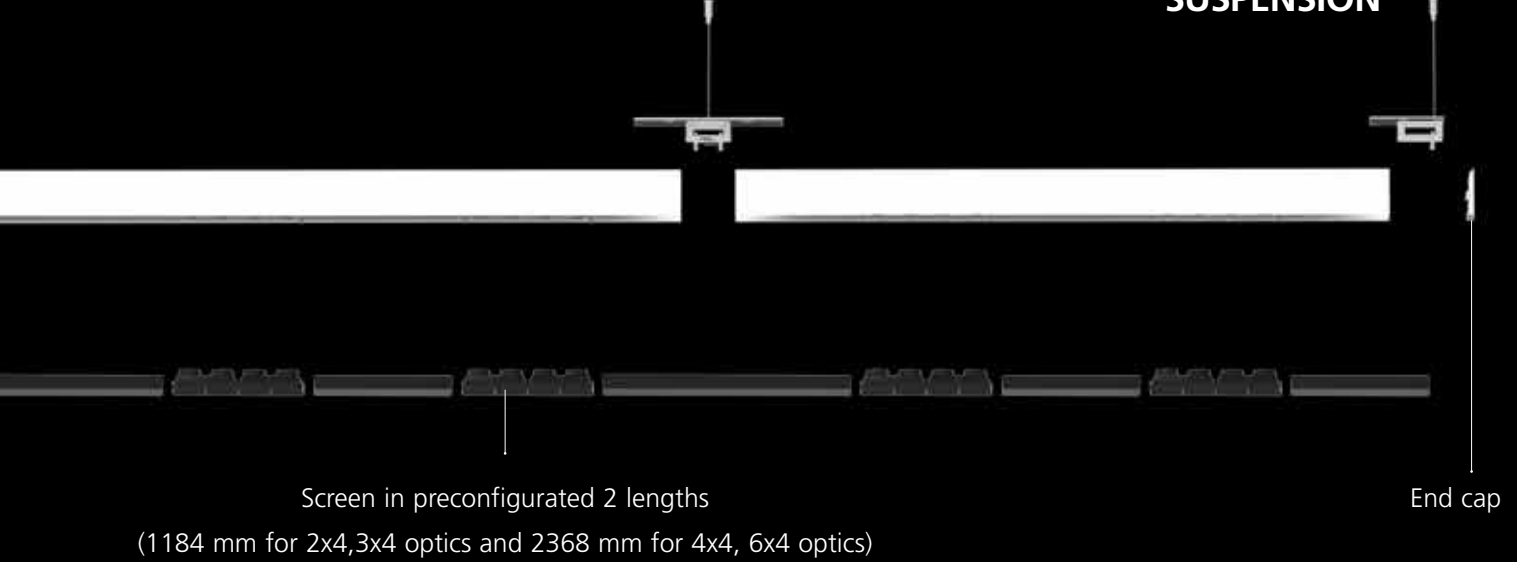

A.39 recessed sharping emission





MacAdam 2SDCM
Life L70 (6K) 50000h

IP20

*Uses 1 DALI address
** Uses 2 DALI addresses

| Trim | | | | | | | Code | | | |
|--------------|------------|-------------|---------------|---------------|----------|---------------|---------------|---------------|---------------|----------|
| Length | Optic | W | CRI | Beam | Flux | CCT | | € | | |
| 1184 mm* | 2x4 optics | 25 W | >90 | S 17° | 1600 lm | 3000 K | BH200. | 01/04/05 | 280,00 | |
| | | | | | 1713 lm | 4000 K | BH201. | 01/04/05 | 280,00 | |
| | | | | F 34° | 1724 lm | 3000 K | BH202. | 01/04/05 | 280,00 | |
| | | | | | 1844 lm | 4000 K | BH203. | 01/04/05 | 280,00 | |
| | | | | | XF 54° | 1681 lm | 3000 K | BH204. | 01/04/05 | 280,00 |
| | | | | | | 1798 lm | 4000 K | BH205. | 01/04/05 | 280,00 |
| | 3x4 optics | 38 W | S 17° | 2401 lm | 3000 K | BH210. | 01/04/05 | 280,00 | | |
| | | | | 2569 lm | 4000 K | BH211. | 01/04/05 | 280,00 | | |
| | | | | F 34° | 2585 lm | 3000 K | BH212. | 01/04/05 | 280,00 | |
| | 2766 lm | 4000 K | BH213. | | 01/04/05 | 280,00 | | | | |
| | 2368 mm | 4x4 optics* | 50 W | >90 | S 17° | 3201 lm | 3000 K | BH220. | 01/04/05 | 460,00 |
| | | | | | | 3425 lm | 4000 K | BH221. | 01/04/05 | 460,00 |
| | | | | | F 34° | 3362 lm | 3000 K | BH222. | 01/04/05 | 460,00 |
| | | | | | | 3688 lm | 4000 K | BH223. | 01/04/05 | 460,00 |
| | | | | | | XF 54° | 3447 lm | 3000 K | BH224. | 01/04/05 |
| 3597 lm | | | | | | | 4000 K | BH225. | 01/04/05 | 460,00 |
| 6x4 optics** | | 80 W | S 17° | 4802 lm | 3000 K | BH230. | 01/04/05 | 460,00 | | |
| | | | | 5138 lm | 4000 K | BH231. | 01/04/05 | 460,00 | | |
| | | | | F 34° | 5171 lm | 3000 K | BH232. | 01/04/05 | 460,00 | |
| 5533 lm | | 4000 K | BH233. | | 01/04/05 | 460,00 | | | | |
| XF 54° | | 5042 lm | 3000 K | BH234. | 01/04/05 | 460,00 | | | | |
| | | 5395 lm | 4000 K | BH235. | 01/04/05 | 460,00 | | | | |



Angle elements

| | Code | € |
|--|---------|------|
| 90° trimless recessed corner (on same plane) 303x303mm | AQ15504 | o.d. |

Screen



| Length | Optic | Code | € |
|---------|------------|---------------|------------|
| 1184 mm | 2x4 optics | BH300. | 01/04 o.d. |
| | 3x4 optics | BH301. | 01/04 o.d. |
| 2368 mm | 4x4 optics | BH302. | 01/04 o.d. |
| | 6x4 optics | BH303. | 01/04 o.d. |

| Driver | Vac | Optic units | | Code |
|--------------|---------|--------------|------------|---------------|
| 32 W 900mA | 220-240 | 1184 mm (2x) | Undimmable | DV1004 |
| 42W 900mA | 220-240 | 1184 mm (3x) | Undimmable | DV1022 |
| 25,2 W 900mA | 220-240 | 1184 mm (2x) | DALI | DV1003 |
| 55 W 900mA | 220-240 | 1184 mm (3x) | DALI | DV1007 |
| 50 W 900mA | 220-240 | 2368 mm (4x) | Undimmable | DV1005 |
| 60W 900mA | 220-240 | 2368 mm (6x) | Undimmable | DV1023 |
| 55 W 900mA | 220-240 | 2368 mm (4x) | DALI | DV1007 |
| 60W 900mA | 220-240 | 2368 mm (6x) | DALI | DV1024 |

Driver 900mA SELV and screen supplied separately.

Trimless

| Length | Optic | W | CRI | Beam | Flux | CCT | Code | € | | | |
|----------|-------------|---------|----------------|--------------|---------|--------|----------------|---------|--------|----------------|--------|
| 1184 mm* | 2x4 optics | 25 W | >90 | S 17° | 1600 lm | 3000 K | BH24001 | 225,00 | | | |
| | | | | | 1713 lm | 4000 K | BH24101 | 225,00 | | | |
| | | | | F 34° | 1724 lm | 3000 K | BH24201 | 225,00 | | | |
| | | | | | 1844 lm | 4000 K | BH24301 | 225,00 | | | |
| | | | | XF 54° | 1681 lm | 3000 K | BH24401 | 225,00 | | | |
| | | | | | 1798 lm | 4000 K | BH24501 | 225,00 | | | |
| | 3x4 optics | 38 W | | S 17° | 2401 lm | 3000 K | BH25001 | 225,00 | | | |
| | | | | | 2569 lm | 4000 K | BH25101 | 225,00 | | | |
| | | | | F 34° | 2585 lm | 3000 K | BH25201 | 225,00 | | | |
| | | | | | 2766 lm | 4000 K | BH25301 | 225,00 | | | |
| | | | | XF 54° | 2521 lm | 3000 K | BH25401 | 225,00 | | | |
| | | | | | 2698 lm | 4000 K | BH25501 | 225,00 | | | |
| 2368 mm | 4x4 optics* | 50 W | >90 | S 17° | 3201 lm | 3000 K | BH26001 | 360,00 | | | |
| | | | | | 3425 lm | 4000 K | BH26101 | 360,00 | | | |
| | | | | F 34° | 3362 lm | 3000 K | BH26201 | 360,00 | | | |
| | | | | | 3688 lm | 4000 K | BH26301 | 360,00 | | | |
| | | | | XF 54° | 3447 lm | 3000 K | BH26401 | 360,00 | | | |
| | | | | | 3597 lm | 4000 K | BH26501 | 360,00 | | | |
| | | | | 6x4 optics** | 80 W | | S 17° | 4802 lm | 3000 K | BH27001 | 360,00 |
| | | | | | | | | 5138 lm | 4000 K | BH27101 | 360,00 |
| | | | | | | | F 34° | 5171 lm | 3000 K | BH27201 | 360,00 |
| | 5533 lm | 4000 K | BH27301 | | | | | 360,00 | | | |
| | XF 54° | 5042 lm | 3000 K | | | | BH27401 | 360,00 | | | |
| | | 5395 lm | 4000 K | | | | BH27501 | 360,00 | | | |



Angle elements


| | Code | € |
|--|---------|------|
| 90° trim recessed corner (on same plane) 303x303mm | AQ15504 | o.d. |

Accessories

| | Code | € | Screen | Code | € |
|--------------------------|---------------------|------|----------------|---------------------|------|
| Trimless recessed frame | | | | | |
| Length 1184 | BH30400 | o.d. | Length 1184 mm | BH300. 01/04 | o.d. |
| Length 2368 | BH30500 | o.d. | | BH301. 01/04 | o.d. |
| | | | 2368 mm | BH302. 01/04 | o.d. |
| | | | | BH303. 01/04 | o.d. |
| Trimless end caps kit 2x | BH306. 01/04 | | | | |

| Driver | Vac | Optic units | Code |
|--------------|---------|--------------|---------------|
| 32 W 900mA | 220-240 | 1184 mm (2x) | DV1004 |
| 42W 900mA | 220-240 | 1184 mm (3x) | DV1022 |
| 25,2 W 900mA | 220-240 | 1184 mm (2x) | DV1003 |
| 55 W 900mA | 220-240 | 1184 mm (3x) | DV1007 |
| 50 W 900mA | 220-240 | 2368 mm (4x) | DV1005 |
| 60W 900mA | 220-240 | 2368 mm (6x) | DV1023 |
| 55 W 900mA | 220-240 | 2368 mm (4x) | DV1007 |
| 60W 900mA | 220-240 | 2368 mm (6x) | DV1024 |

A.39 suspension, ceiling sharpening



MacAdam 2SDCM
Life L70 (6K) 50000h



IP20

*Uses 1 DALI address
** Uses 2 DALI addresses

| Direct emission | | | | | | | |
|-----------------|--------------|------|-----|--------|---------|---------|--------|
| Length | Optic | W | CRI | Beam | Flux | CCT | |
| 1184 mm* | 2x4 optics | 25 W | >90 | S 17° | 1600 lm | 3000 K | |
| | | | | | 1713 lm | 4000 K | |
| | | | | | 1724 lm | 3000 K | |
| | | | | F 34° | 1844 lm | 4000 K | |
| | | | | | XF 54° | 1681 lm | 3000 K |
| | | | | | | 1798 lm | 4000 K |
| | 3x4 optics | 38 W | >90 | S 17° | 2401 lm | 3000 K | |
| | | | | | 2569 lm | 4000 K | |
| | | | | | F 34° | 2585 lm | 3000 K |
| | | | | XF 54° | 2766 lm | 4000 K | |
| | | | | | 2521 lm | 3000 K | |
| | | | | | 2698 lm | 4000 K | |
| 2368 mm | 4x4 optics* | 50 W | >90 | S 17° | 3201 lm | 3000 K | |
| | | | | | 3425 lm | 4000 K | |
| | | | | | F 34° | 3362 lm | 3000 K |
| | | | | XF 54° | 3688 lm | 4000 K | |
| | | | | | 3447 lm | 3000 K | |
| | | | | | 3597 lm | 4000 K | |
| | 6x4 optics** | 80 W | >90 | S 17° | 4802 lm | 3000 K | |
| | | | | | 5138 lm | 4000 K | |
| | | | | | F 34° | 5171 lm | 3000 K |
| | | | | XF 54° | 5533 lm | 4000 K | |
| | | | | | 5042 lm | 3000 K | |
| | | | | | 5395 lm | 4000 K | |

| Undimmable | | |
|------------|----------|--------|
| Code | | € |
| BH000. | 01/04/05 | 340,00 |
| BH001. | 01/04/05 | 340,00 |
| BH004. | 01/04/05 | 340,00 |
| BH005. | 01/04/05 | 340,00 |
| BH008. | 01/04/05 | 340,00 |
| BH009. | 01/04/05 | 340,00 |
| BH020. | 01/04/05 | 340,00 |
| BH021. | 01/04/05 | 340,00 |
| BH024. | 01/04/05 | 340,00 |
| BH025. | 01/04/05 | 340,00 |
| BH028. | 01/04/05 | 340,00 |
| BH029. | 01/04/05 | 340,00 |
| BH040. | 01/04/05 | 500,00 |
| BH041. | 01/04/05 | 500,00 |
| BH044. | 01/04/05 | 500,00 |
| BH045. | 01/04/05 | 500,00 |
| BH048. | 01/04/05 | 500,00 |
| BH049. | 01/04/05 | 500,00 |
| BH060. | 01/04/05 | 500,00 |
| BH061. | 01/04/05 | 500,00 |
| BH064. | 01/04/05 | 500,00 |
| BH065. | 01/04/05 | 500,00 |
| BH068. | 01/04/05 | 500,00 |
| BH069. | 01/04/05 | 500,00 |

| Dimmable DALI | | |
|---------------|----------|--------|
| Code | | € |
| BH002. | 01/04/05 | 360,00 |
| BH003. | 01/04/05 | 360,00 |
| BH006. | 01/04/05 | 360,00 |
| BH007. | 01/04/05 | 360,00 |
| BH010. | 01/04/05 | 360,00 |
| BH011. | 01/04/05 | 360,00 |
| BH022. | 01/04/05 | 360,00 |
| BH023. | 01/04/05 | 360,00 |
| BH026. | 01/04/05 | 360,00 |
| BH027. | 01/04/05 | 360,00 |
| BH030. | 01/04/05 | 360,00 |
| BH031. | 01/04/05 | 360,00 |
| BH042. | 01/04/05 | 550,00 |
| BH043. | 01/04/05 | 550,00 |
| BH046. | 01/04/05 | 550,00 |
| BH047. | 01/04/05 | 550,00 |
| BH050. | 01/04/05 | 550,00 |
| BH051. | 01/04/05 | 550,00 |
| BH062. | 01/04/05 | 550,00 |
| BH063. | 01/04/05 | 550,00 |
| BH066. | 01/04/05 | 550,00 |
| BH067. | 01/04/05 | 550,00 |
| BH070. | 01/04/05 | 550,00 |
| BH071. | 01/04/05 | 550,00 |



Accessories ceiling

End caps kit 2x

Code **AT094** 01/04/05 € o.d.

Ceiling bracket and mechanical joint

Code **AT09501** € o.d.

End ceiling bracket (2 pcs)

Code **AT09502** € o.d.

Accessories suspension

Undimmable Feeding kit including 2 suspension cables (3 poles)

Code **BH16500** € o.d.

Dimmable Feeding kit including 2 suspension cables (5 poles)

Code **BH16600** € o.d.

Mechanical joint including 1 suspension cable

Code **AT09500** € o.d.

End caps kit 2x

Code **BH164** 01/04/05 € o.d.

Screen

Length 1184 mm

Optic 2x4 optics
3x4 optics

Code **BH160** 01/04/05 € o.d.
BH161 01/04/05 € o.d.

2368 mm

4x4 optics
6x4 optics

Code **BH162** 01/04/05 € o.d.
BH163 01/04/05 € o.d.

Angle elements

90° trim recessed corner (on same plane)
301x301mm


Code **AQ155** 01/04/05 € o.d.

90° trimless recessed corner (on same plane)
301x301mm

Code **AQ15500** € o.d.

Screen supplied separately.

| Direct and Indirect emission | | | | | | | Undimmable | | Dimmable DALI | | | | | |
|------------------------------|------------------------------|------------------------------|----------------------------|---------------|-----------------|-----------------|-----------------|---------------|---------------|---------------|---------------|---------------|----------|--------|
| Length | Optic | W | CRI | Beam | Flux | CCT | Code | € | Code | € | | | | |
| 1184 mm*2x4 optics | 25W direct 26W indirect | >90 | S 17° | | 1600lm direct | 3000 K | BH080. | 01/04/05 | 470,00 | BH082. | 01/04/05 | 490,00 | | |
| | | | | | 2476lm indirect | | | | | | | | | |
| | | | | F 34° | 1713lm direct | 4000 K | BH081. | 01/04/05 | 470,00 | BH083. | 01/04/05 | 490,00 | | |
| | | | | | 2476lm indirect | | | | | | | | | |
| | | | | XF 54° | 1724lm direct | 3000 K | BH084. | 01/04/05 | 470,00 | BH086. | 01/04/05 | 490,00 | | |
| | | | | | 2476lm indirect | | | | | | | | | |
| | | 1844lm direct | 4000 K | BH085. | 01/04/05 | 470,00 | BH087. | 01/04/05 | 490,00 | | | | | |
| | | 2476lm indirect | | | | | | | | | | | | |
| | 3x4 optics | 38W indirect 26W indirect | >90 | S 17° | | 2401lm direct | 3000 K | BH100. | 01/04/05 | 470,00 | BH102. | 01/04/05 | 490,00 | |
| | | | | | | 2476lm indirect | | | | | | | | |
| | | | | | F 34° | 2569lm direct | 4000 K | BH101. | 01/04/05 | 470,00 | BH103. | 01/04/05 | 490,00 | |
| | | | | | | 2476lm indirect | | | | | | | | |
| | | | | | XF 54° | 2585lm direct | 3000 K | BH104. | 01/04/05 | 470,00 | BH106. | 01/04/05 | 490,00 | |
| | | | | | | 2476lm indirect | | | | | | | | |
| | | | 2766lm direct | 4000 K | BH105. | 01/04/05 | 470,00 | BH107. | 01/04/05 | 490,00 | | | | |
| | | | 2476lm indirect | | | | | | | | | | | |
| | | 2368 mm 4x4 optics* | 50W direct 54W indirect | >90 | S 17° | | 2521lm direct | 3000 K | BH108. | 01/04/05 | 470,00 | BH110. | 01/04/05 | 490,00 |
| | | | | | | | 2476lm indirect | | | | | | | |
| F 34° | | | | | | 2698lm direct | 4000 K | BH109. | 01/04/05 | 470,00 | BH111. | 01/04/05 | 490,00 | |
| | | | | | | 2476lm indirect | | | | | | | | |
| XF 54° | 3201lm direct | | | | | 3000 K | BH120. | 01/04/05 | 770,00 | BH122. | 01/04/05 | 930,00 | | |
| | 4951lm indirect | | | | | | | | | | | | | |
| 6x4 optics** | 80W indirect 54W indirect | >90 | S 17° | | 3425lm direct | 4000 K | BH121. | 01/04/05 | 770,00 | BH123. | 01/04/05 | 930,00 | | |
| | | | | | 4951lm indirect | | | | | | | | | |
| | | | | F 34° | 3362lm direct | 3000 K | BH124. | 01/04/05 | 770,00 | BH126. | 01/04/05 | 930,00 | | |
| | | | | | 4951lm indirect | | | | | | | | | |
| | | | | XF 54° | 3688lm direct | 4000 K | BH125. | 01/04/05 | 770,00 | BH127. | 01/04/05 | 930,00 | | |
| | | | | | 4951lm indirect | | | | | | | | | |
| | | 3447lm direct | 3000 K | BH128. | 01/04/05 | 770,00 | BH130. | 01/04/05 | 930,00 | | | | | |
| | | 4951lm indirect | | | | | | | | | | | | |
| | 2368 mm 4x4 optics* | 50W direct 54W indirect | >90 | S 17° | | 3597lm direct | 4000 K | BH129. | 01/04/05 | 770,00 | BH131. | 01/04/05 | 930,00 | |
| | | | | | | 4951lm indirect | | | | | | | | |
| | | | | | F 34° | 4802lm direct | 3000 K | BH140. | 01/04/05 | 770,00 | BH142. | 01/04/05 | 930,00 | |
| | | | | | | 4951lm indirect | | | | | | | | |
| XF 54° | | | | | 5138lm direct | 4000 K | BH141. | 01/04/05 | 770,00 | BH143. | 01/04/05 | 930,00 | | |
| | | | | | 4951lm indirect | | | | | | | | | |
| 2368 mm 4x4 optics* | 50W direct 54W indirect | >90 | S 17° | | 5171lm direct | 3000 K | BH144. | 01/04/05 | 770,00 | BH146. | 01/04/05 | 930,00 | | |
| | | | | | 4951lm indirect | | | | | | | | | |
| | | | | F 34° | 5533lm direct | 4000 K | BH145. | 01/04/05 | 770,00 | BH147. | 01/04/05 | 930,00 | | |
| | | | | | 4951lm indirect | | | | | | | | | |
| | | | | XF 54° | 5042lm direct | 3000 K | BH148. | 01/04/05 | 770,00 | BH150. | 01/04/05 | 930,00 | | |
| | | | | | 4951lm indirect | | | | | | | | | |
| | 5395lm direct | 4000 K | BH149. | 01/04/05 | 770,00 | BH151. | 01/04/05 | 930,00 | | | | | | |
| | 4951lm indirect | | | | | | | | | | | | | |



Accessories suspension

| | Code | € |
|--|----------------|---------------|
| Undimmable Feeding kit including 2 suspension cables (3 poles) | BH16500 | o.d. |
| Dimmable Feeding kit including 2 suspension cables (5 poles) | BH16600 | o.d. |
| Mechanical joint including 1 suspension cable | AT09500 | o.d. |
| End caps kit 2x | BH164. | 01/04/05 o.d. |

Screen

| Length | Optic | Code | € |
|---------|------------|---------------|---------------|
| 1184 mm | 2x4 optics | BH160. | 01/04/05 o.d. |
| | 3x4 optics | BH161. | 01/04/05 o.d. |
| 2368 mm | 4x4 optics | BH162. | 01/04/05 o.d. |
| | 6x4 optics | BH163. | 01/04/05 o.d. |

Angle elements

| | Code | € |
|---|----------------|---------------|
| 90° trim recessed corner (on same plane) 301x301mm | AQ155. | 01/04/05 o.d. |
| 90° trimless recessed corner (on same plane) 301x301mm | AQ15500 | o.d. |



For further information on Series Y
visit artemide.com

Series Y

“DIVORCE LIGHTING FROM THE CEILING. Series Y creates a soft dialogue with the space it illuminates. It is the intersection between complexity and simplicity, functionality and aesthetic. It solves real issues in the workplace like the needs of more uneven compositions and unexpected, open or closed, geometries”.


Gensler









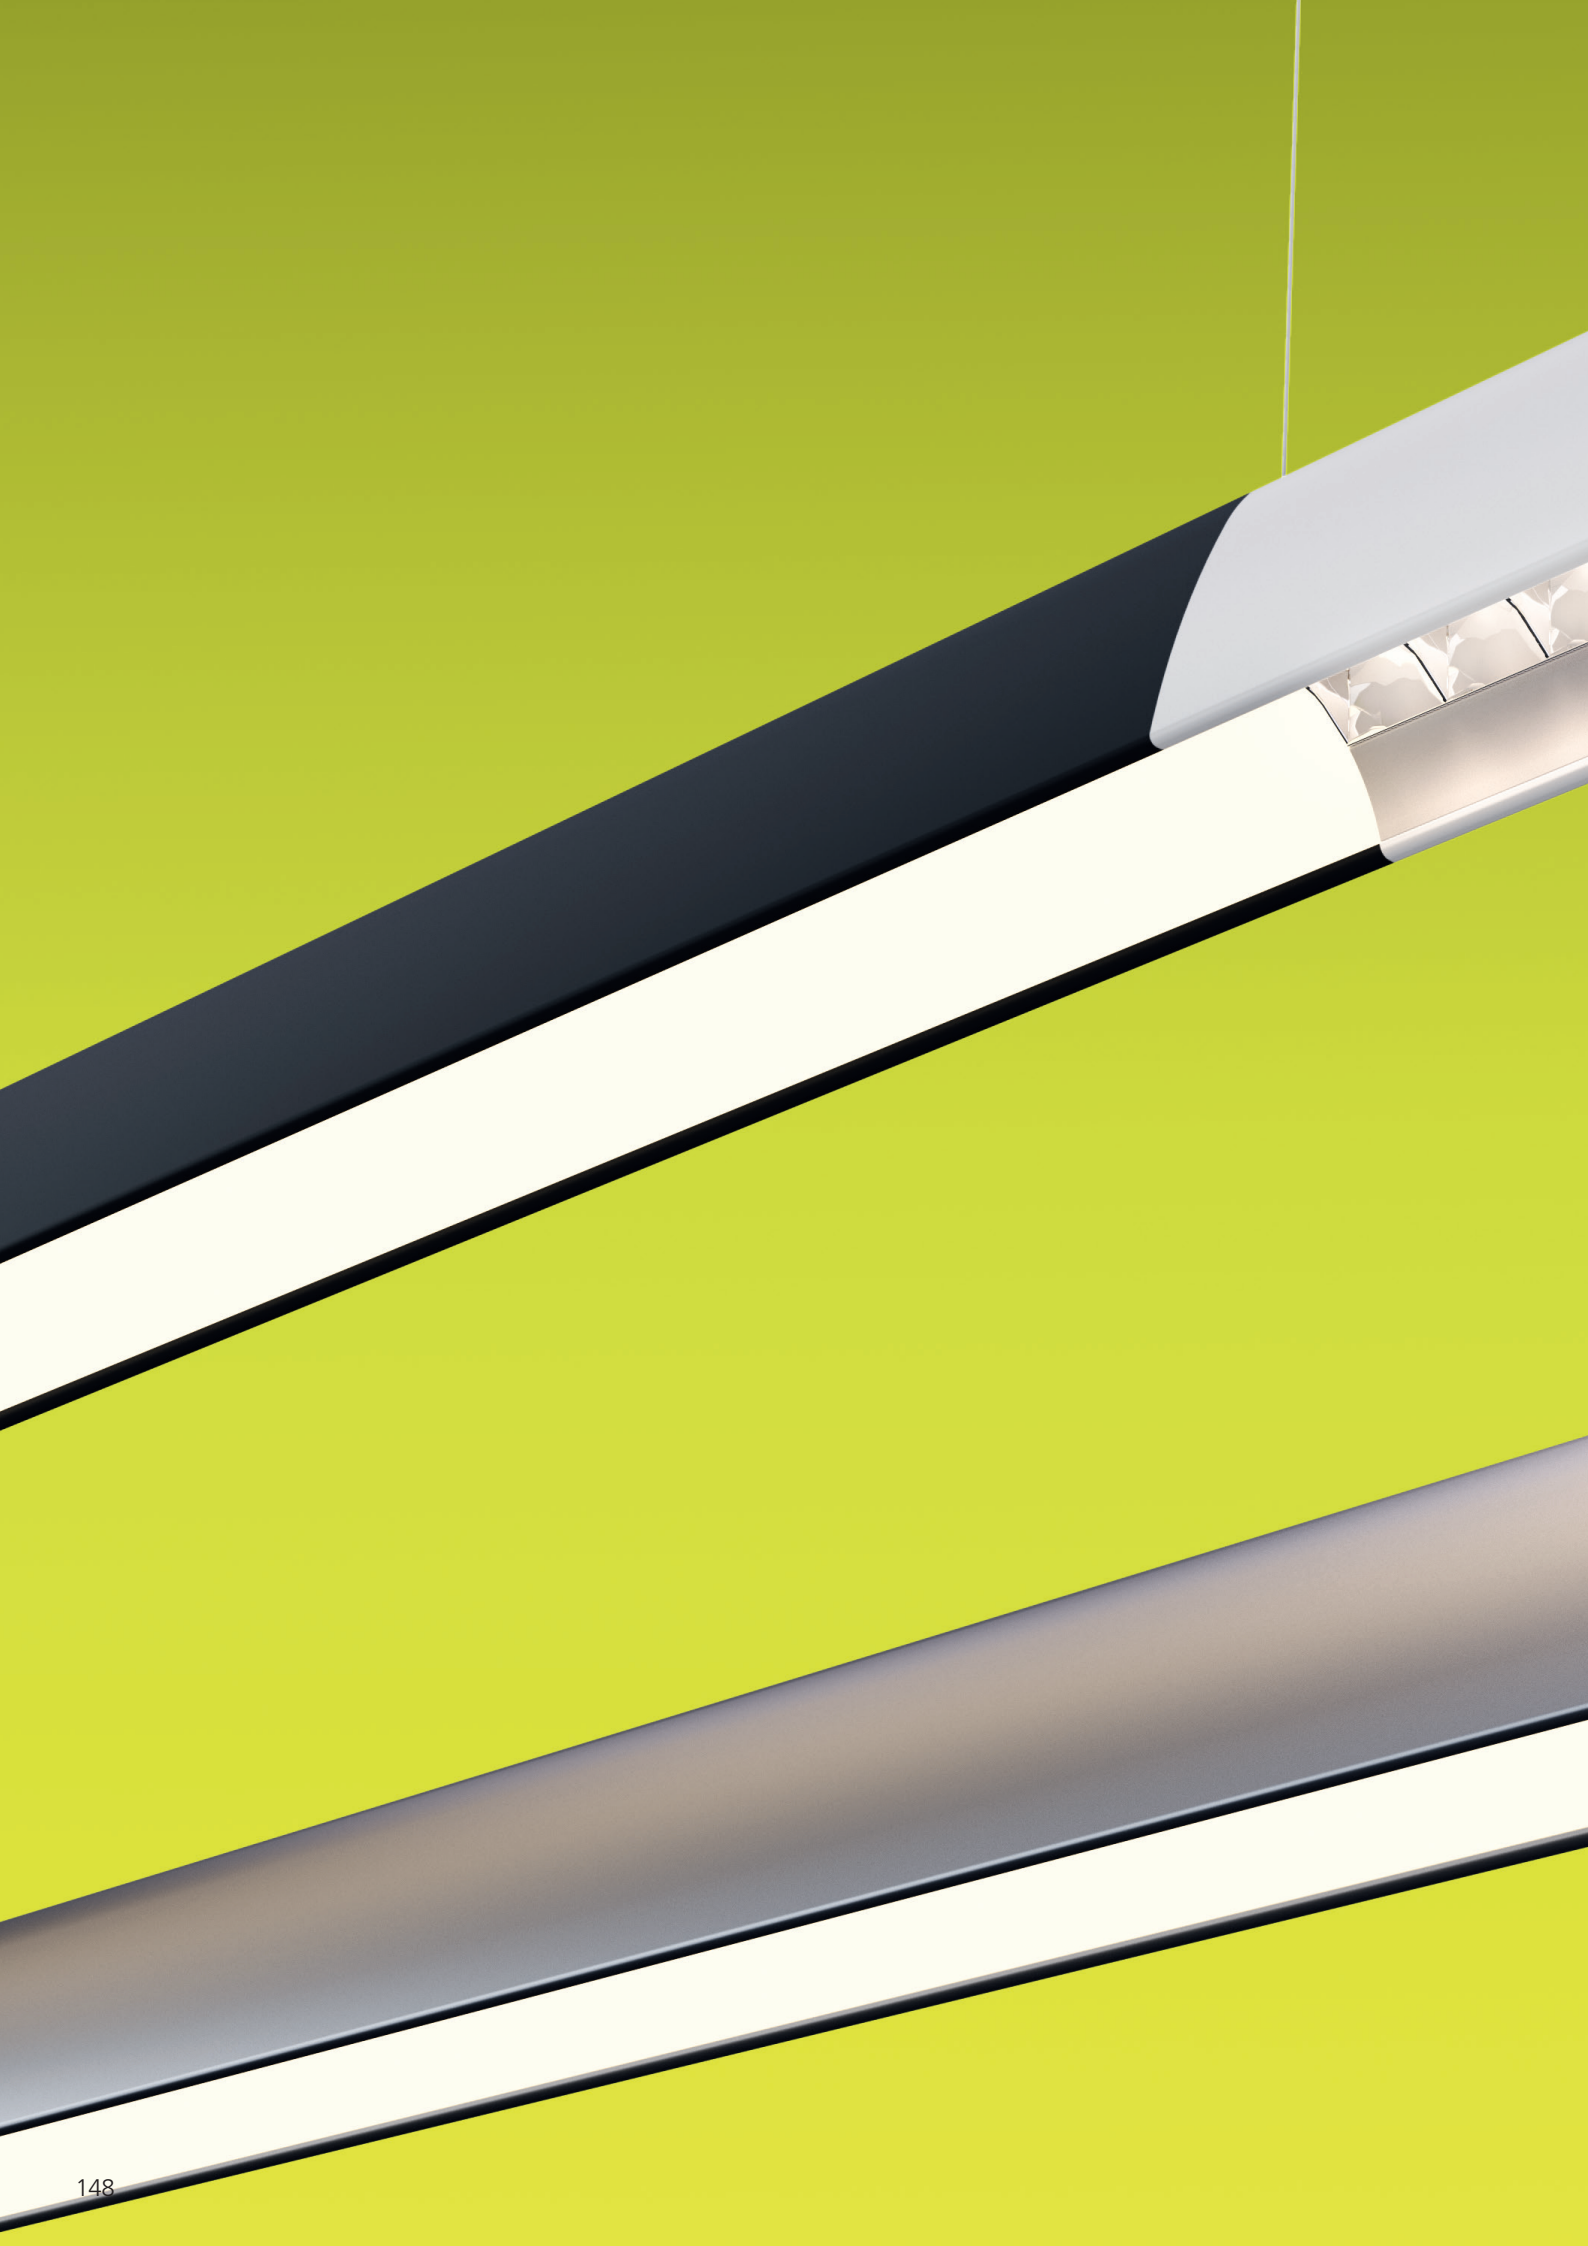





Series Y is a responsive system

Gensler - Steven Meier and Vincenzo Centinaro
2017



Series Y optics

Direct emission

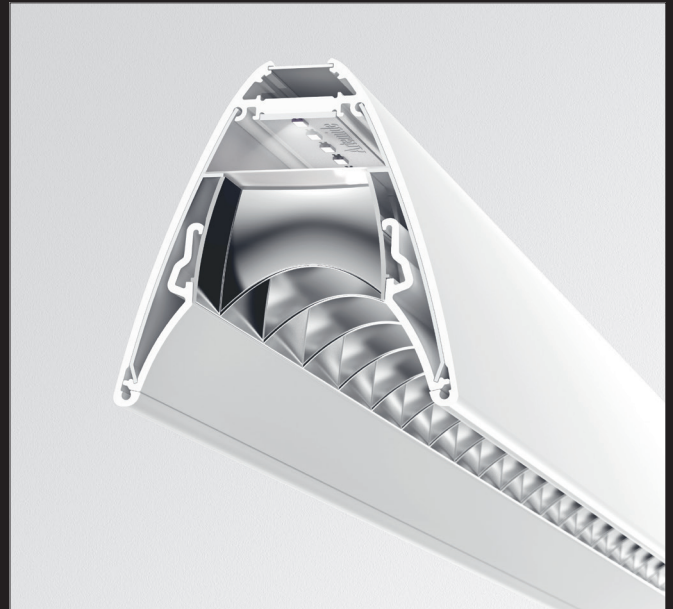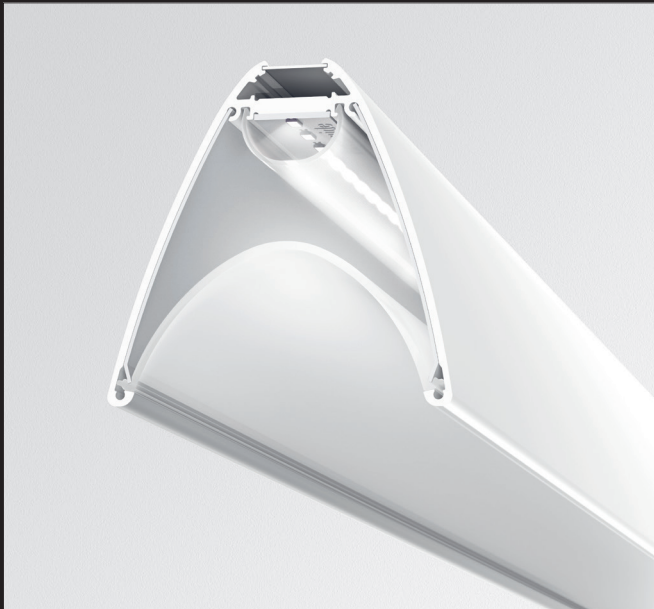

Diffuse emission




37W
1845 lm
Undimmable

Controlled emission



37W
2143 lm
Undimmable

Direct + Indirect

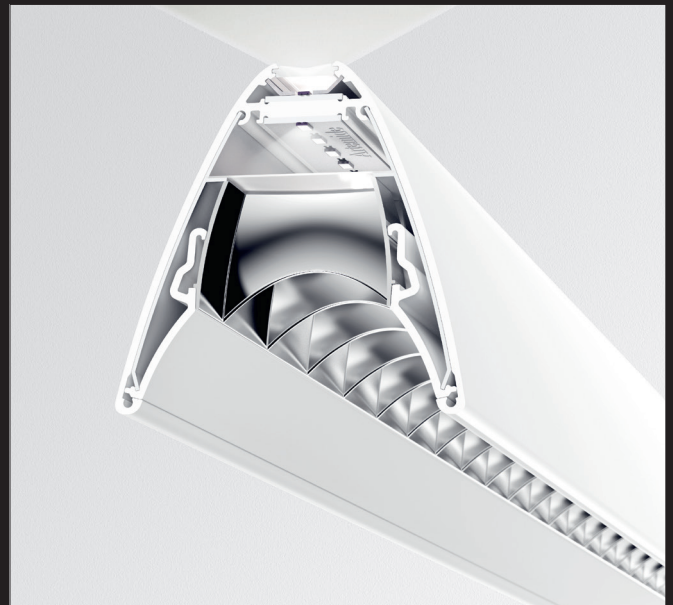

Diffuse + Batwing emission




55W
3621 lm
Dimmable DALI separately

Controlled + Batwing emission



55W
3919 lm
Dimmable DALI separately

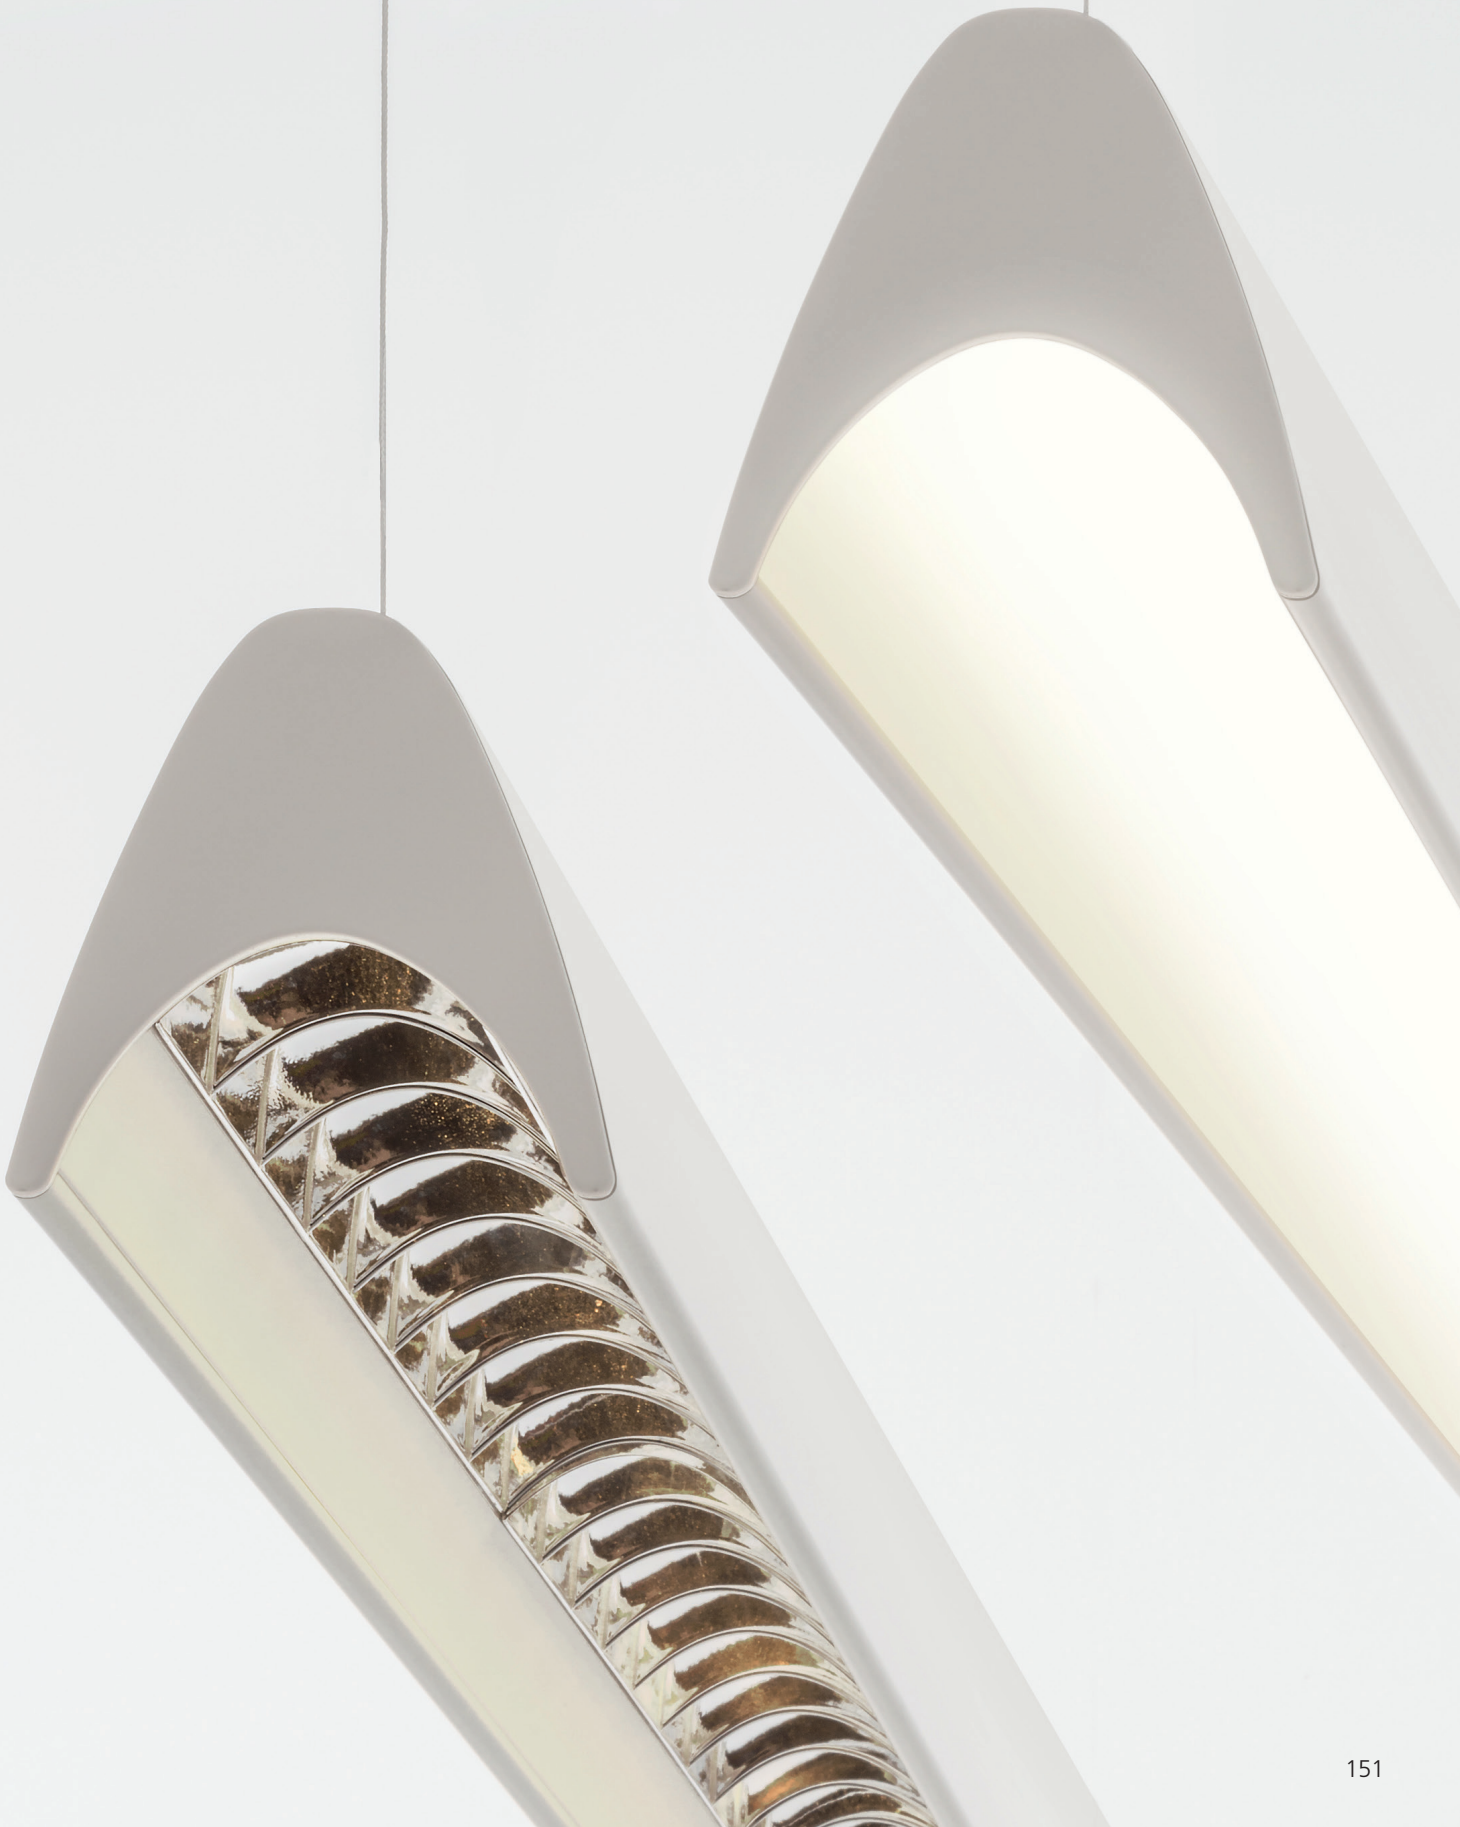

Series Y color temperatures


3000K



4000K



Fast delivery

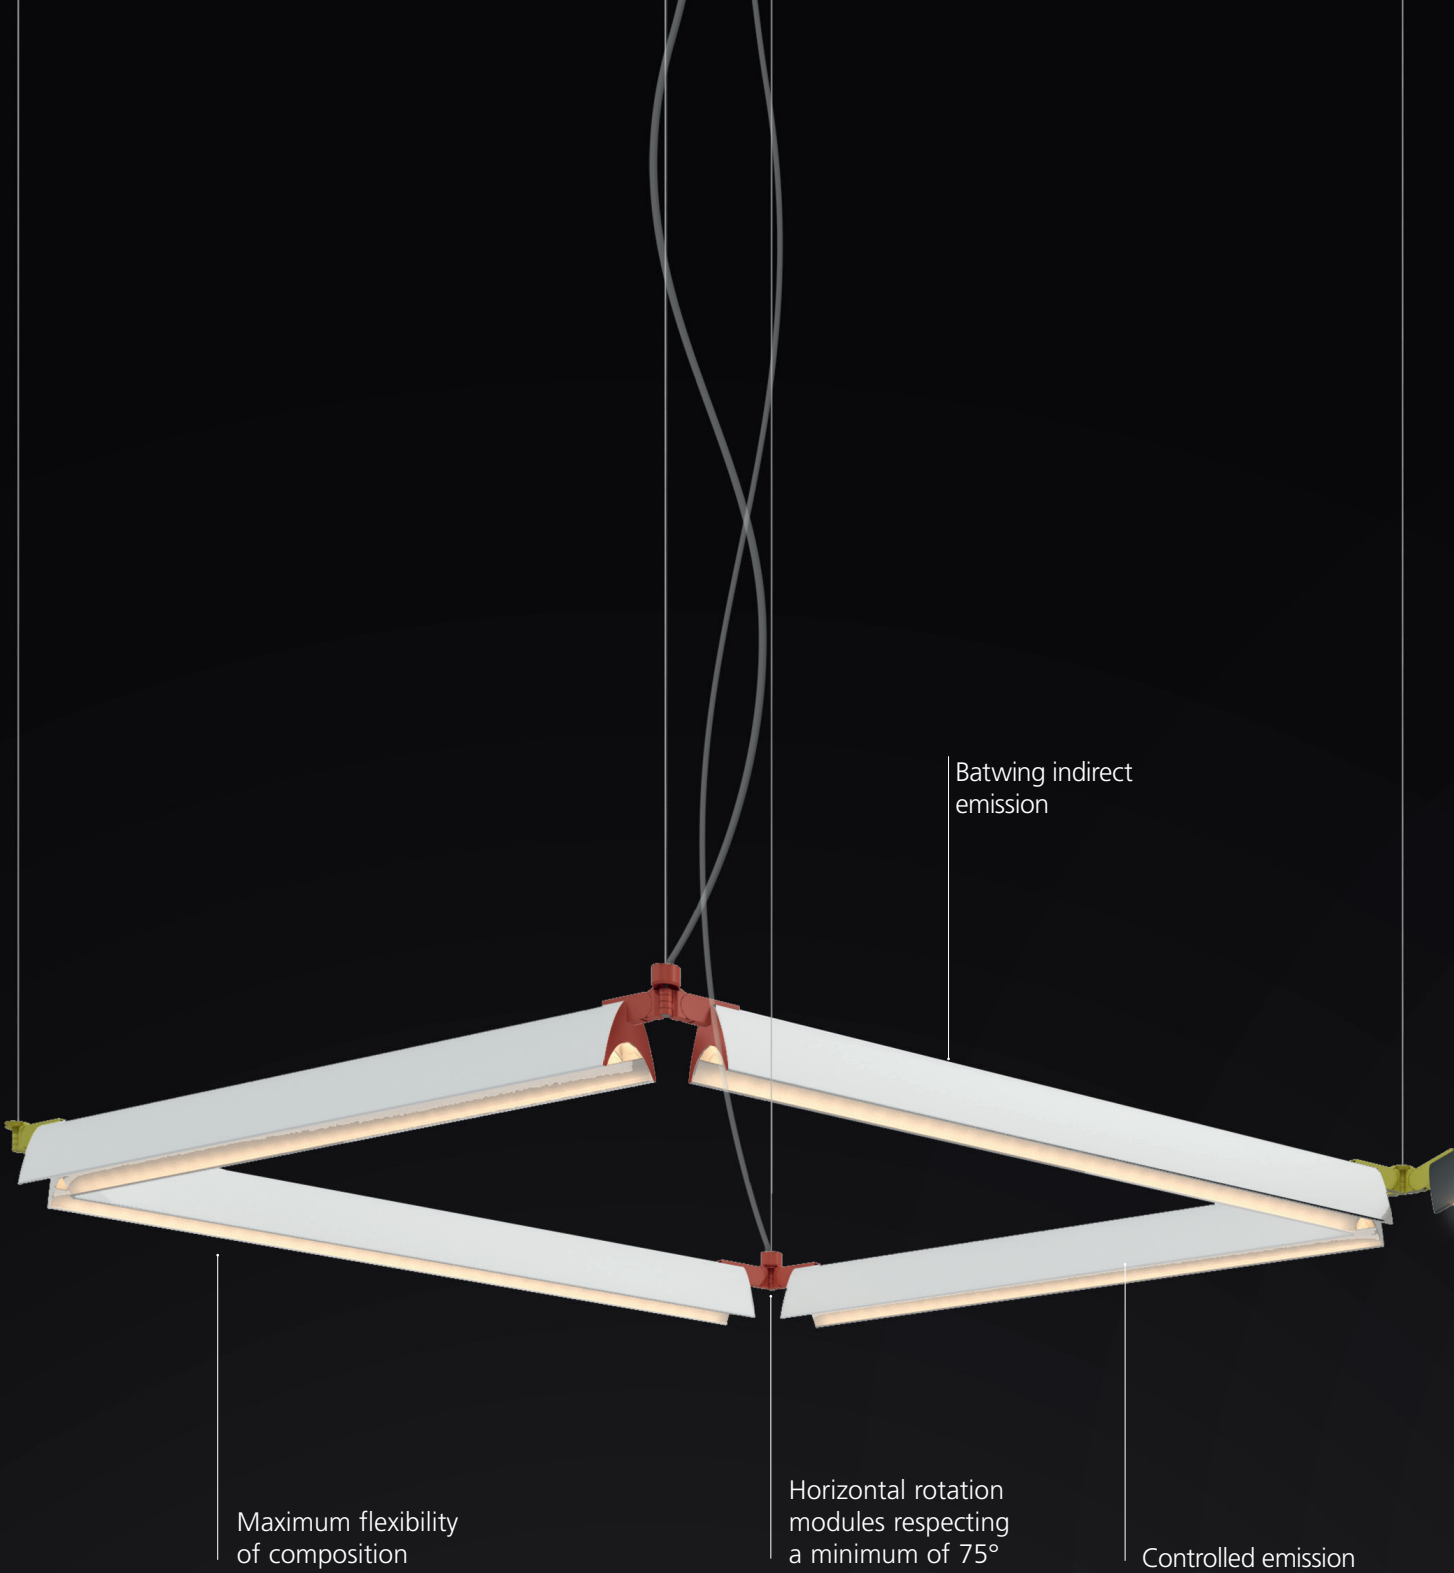

Batwing indirect emission

Maximum flexibility of composition

Horizontal rotation modules respecting a minimum of 75°

Controlled emission




Diffused emission

Free vertical tilt up to
30° upwards or 30°
downwards

Horizontal and vertical freedom to play with

Rotation on horizontal plane


During the installation it is possible to freely choose the position of each single module, respecting a minimum angle between two modules of 75°.

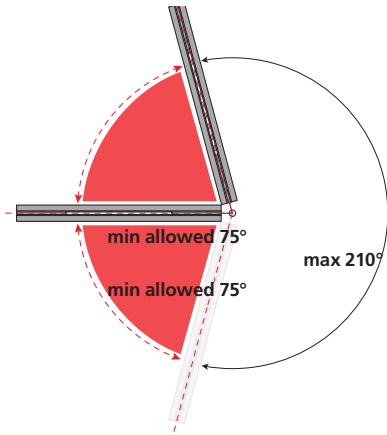

Tilt on vertical plane


Each module can be easily tilted (upward or downward) up to 30° from the horizontal plane.

This two movements (rotation and tilting) can be mixed up in infinite possibilities to best adapt to space requirements.

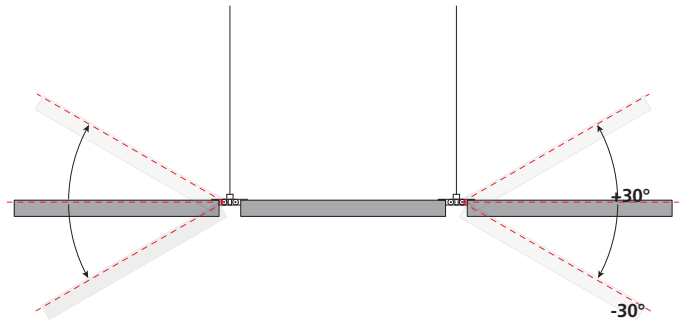


Possible multiple configurations up to 4 modules


Joint with cable



x 2 modules




x 3 modules




x 4 modules




Joint without cable



x 2 modules




x 3 modules




x 4 modules




Series Y joints

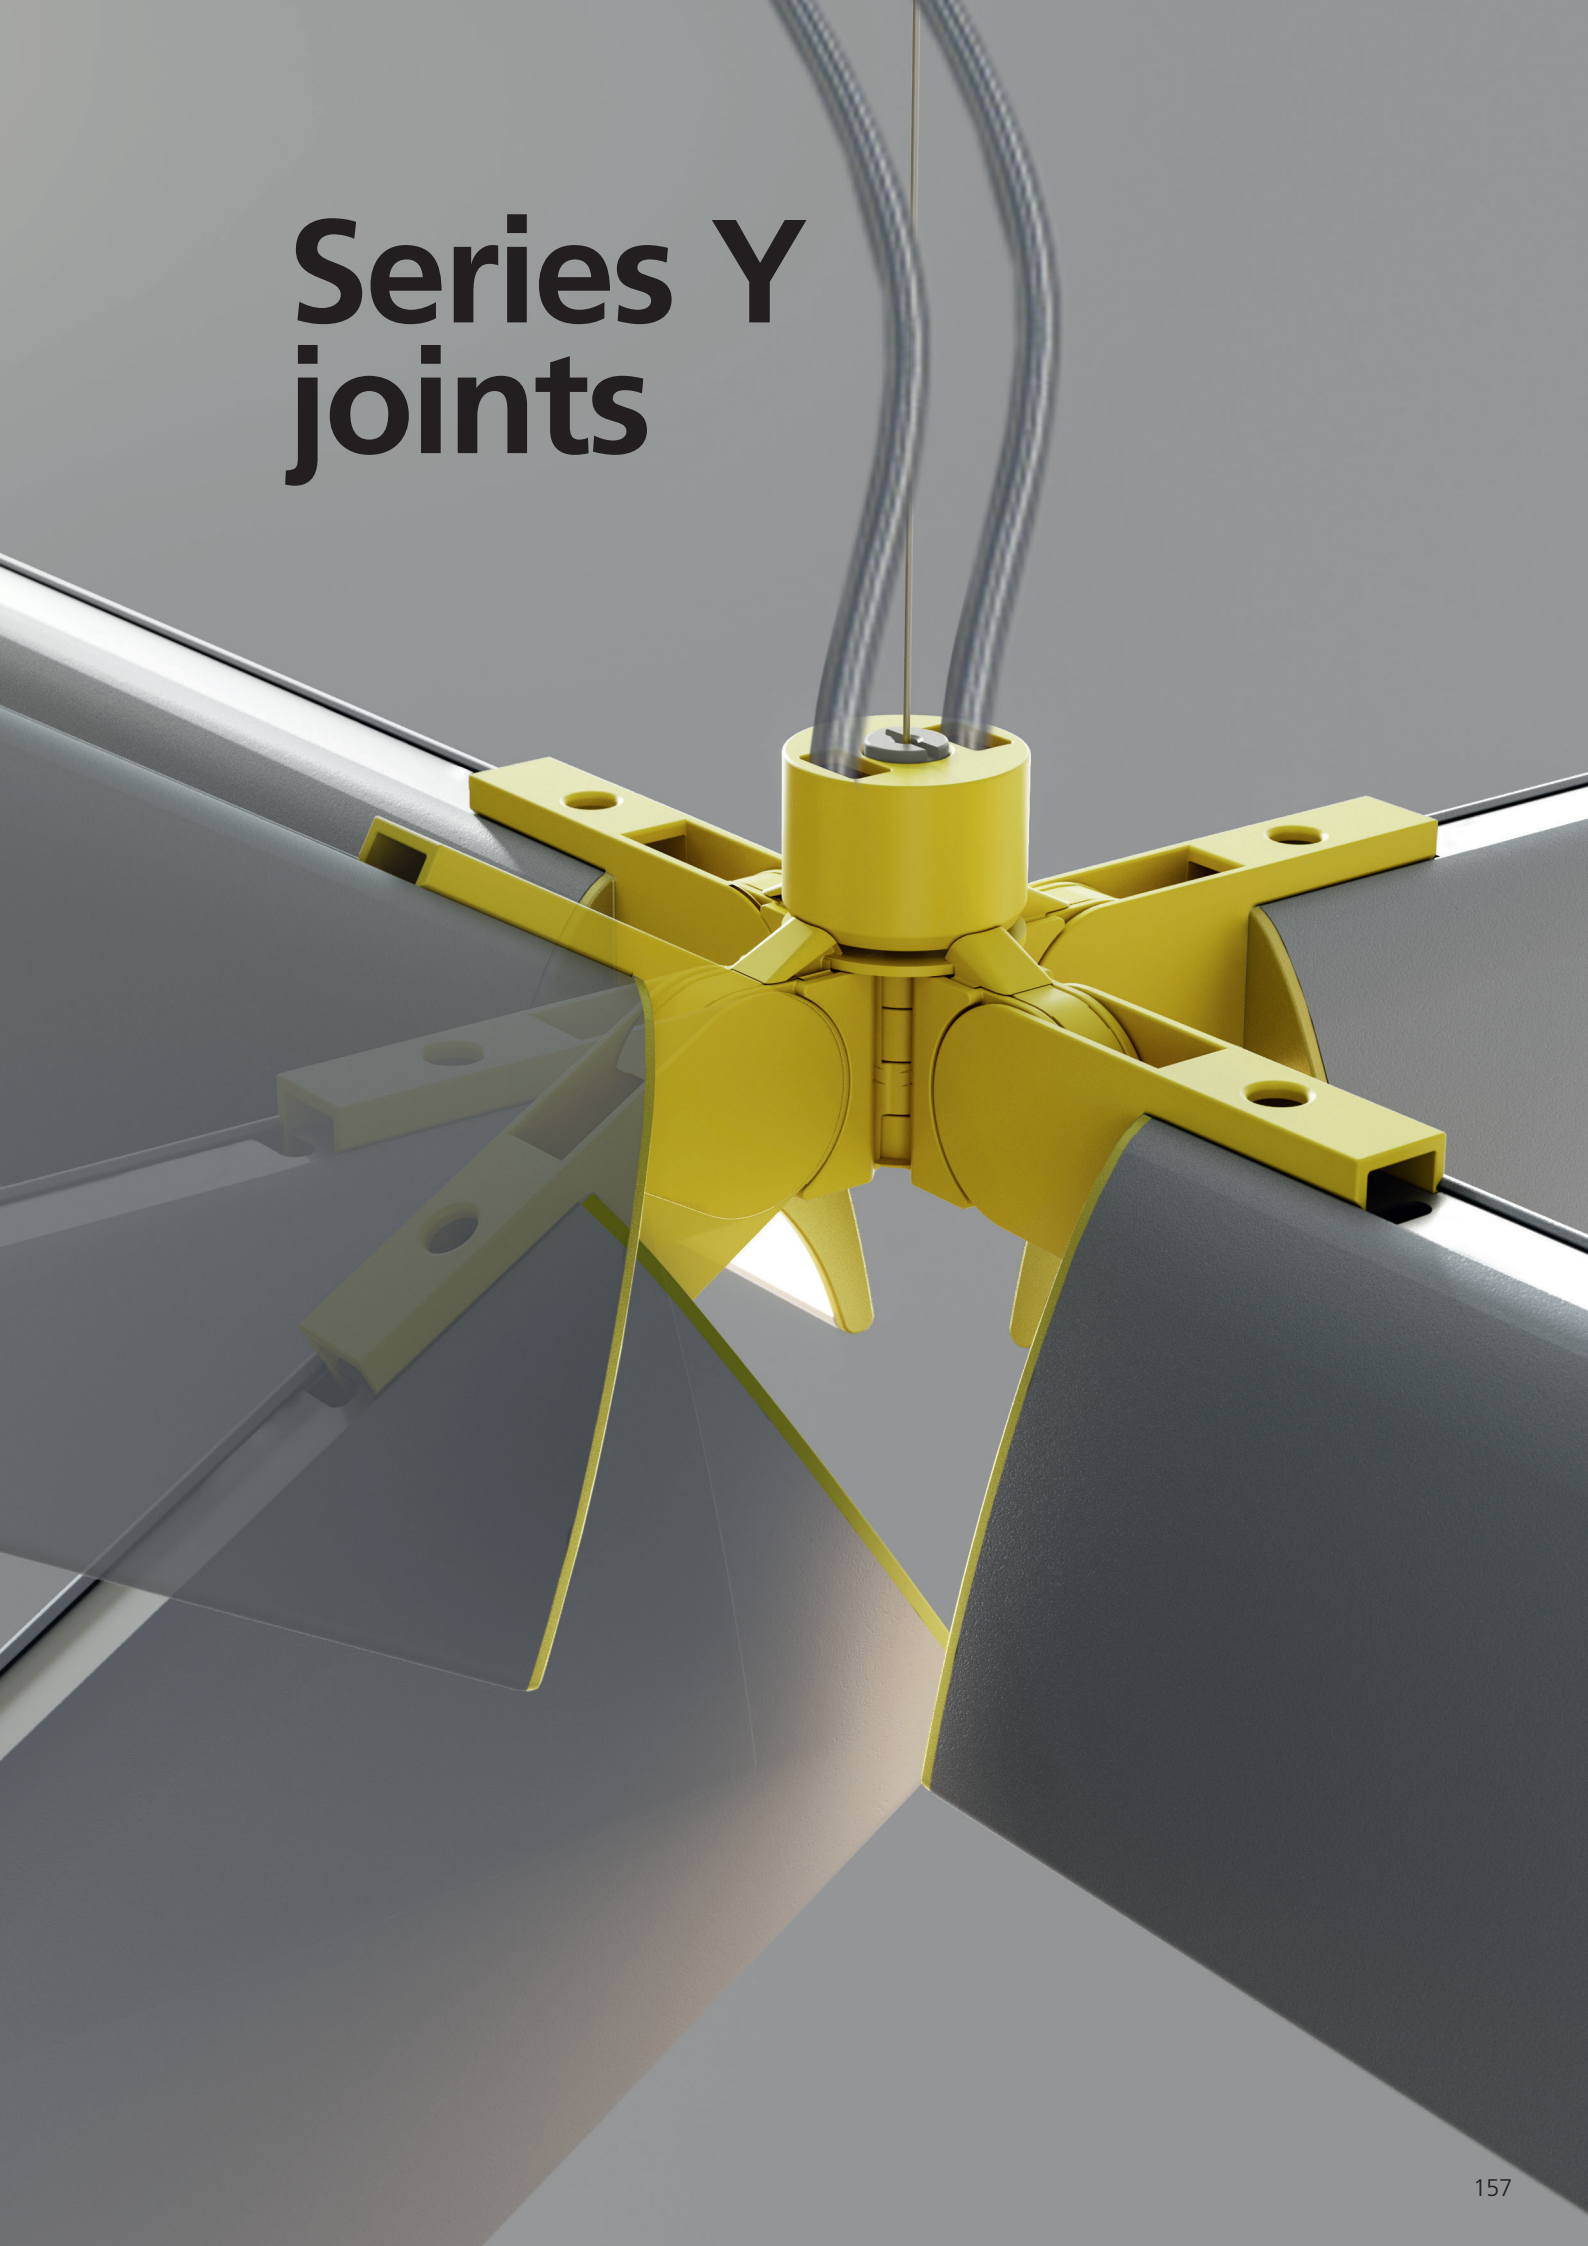


Series Y linear configuration

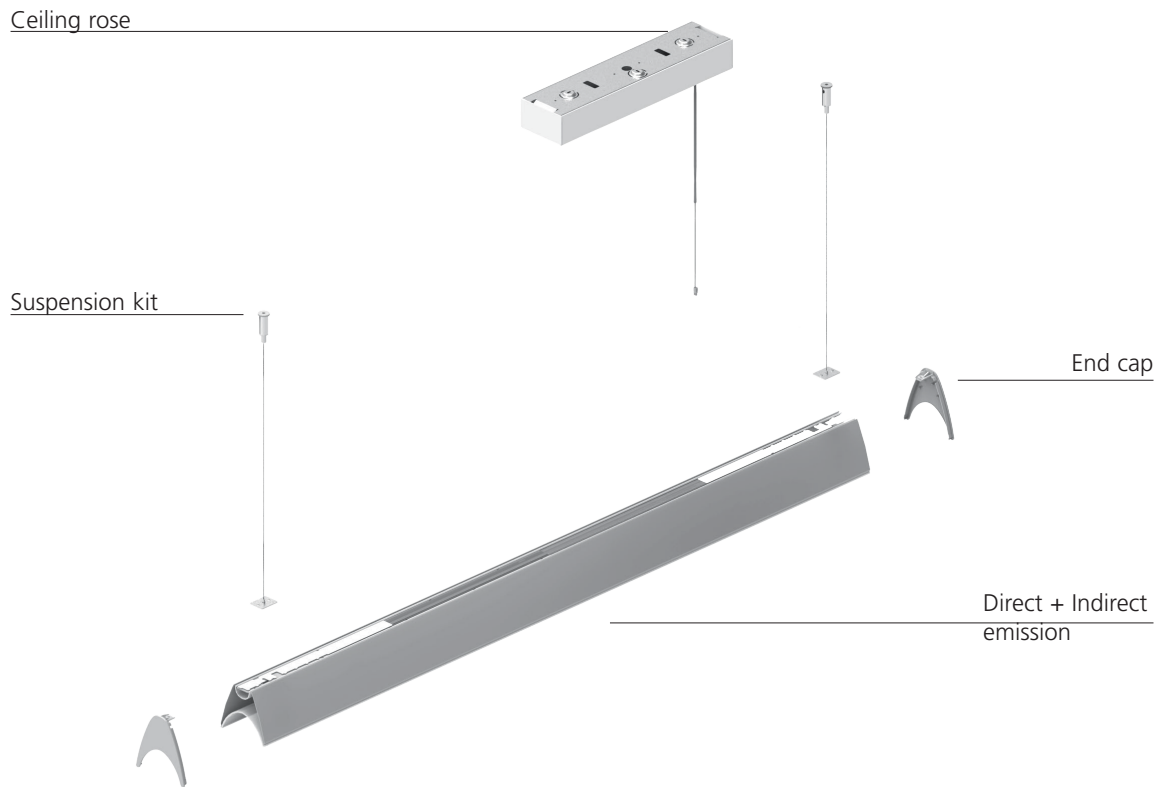

1 Module

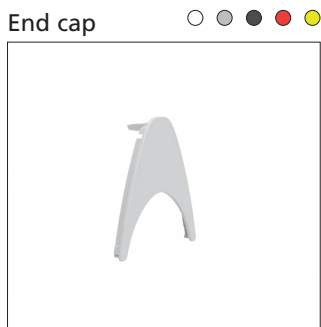

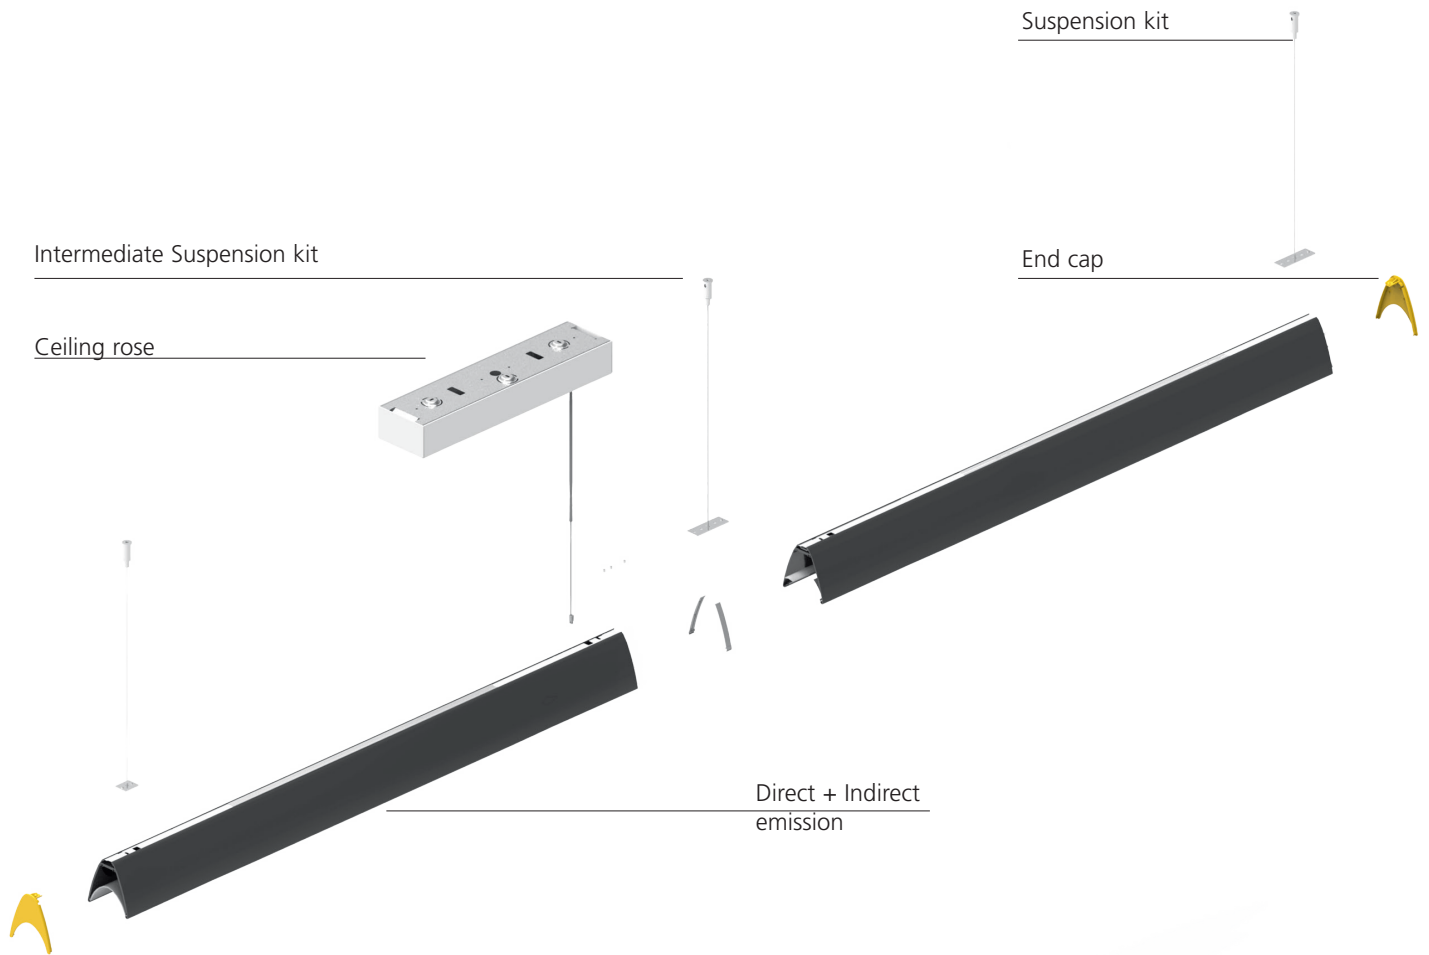

More than 2 Modules

Ceiling rose




Small 416x99x65 mm
 x2, x3, x4 modules
 Undimmable
 x2 modules
 Dimmable DALI



Big 416x139x65 mm
 x3, x4 modules
 Dimmable DALI

Series Y flexible configuration

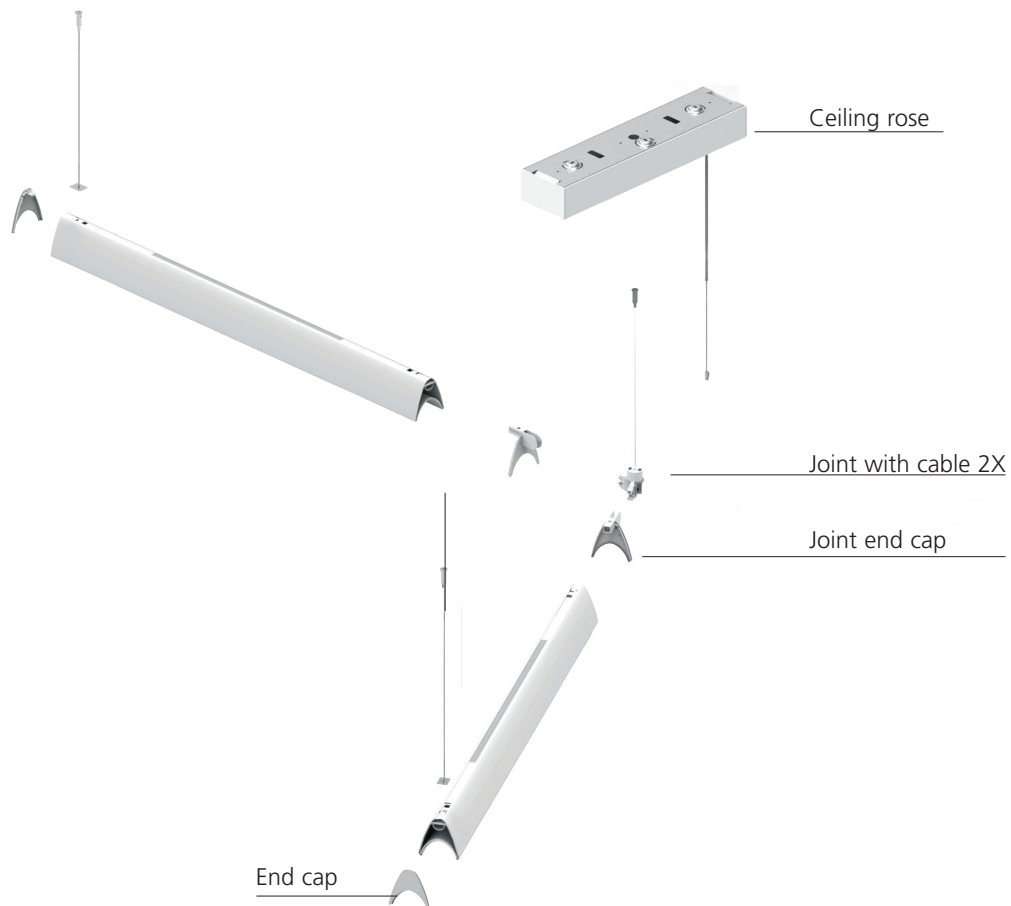

2 Modules

Joint end cap ○ ● ● ● ● Suspension kit




Ceiling rose ○




Small 416x99x65 mm
x2, x3, x4 modules
Undimmable
x2 modules
Dimmable DALI

Big 416x139x65 mm
x3, x4 modules
Dimmable DALI

3 Modules

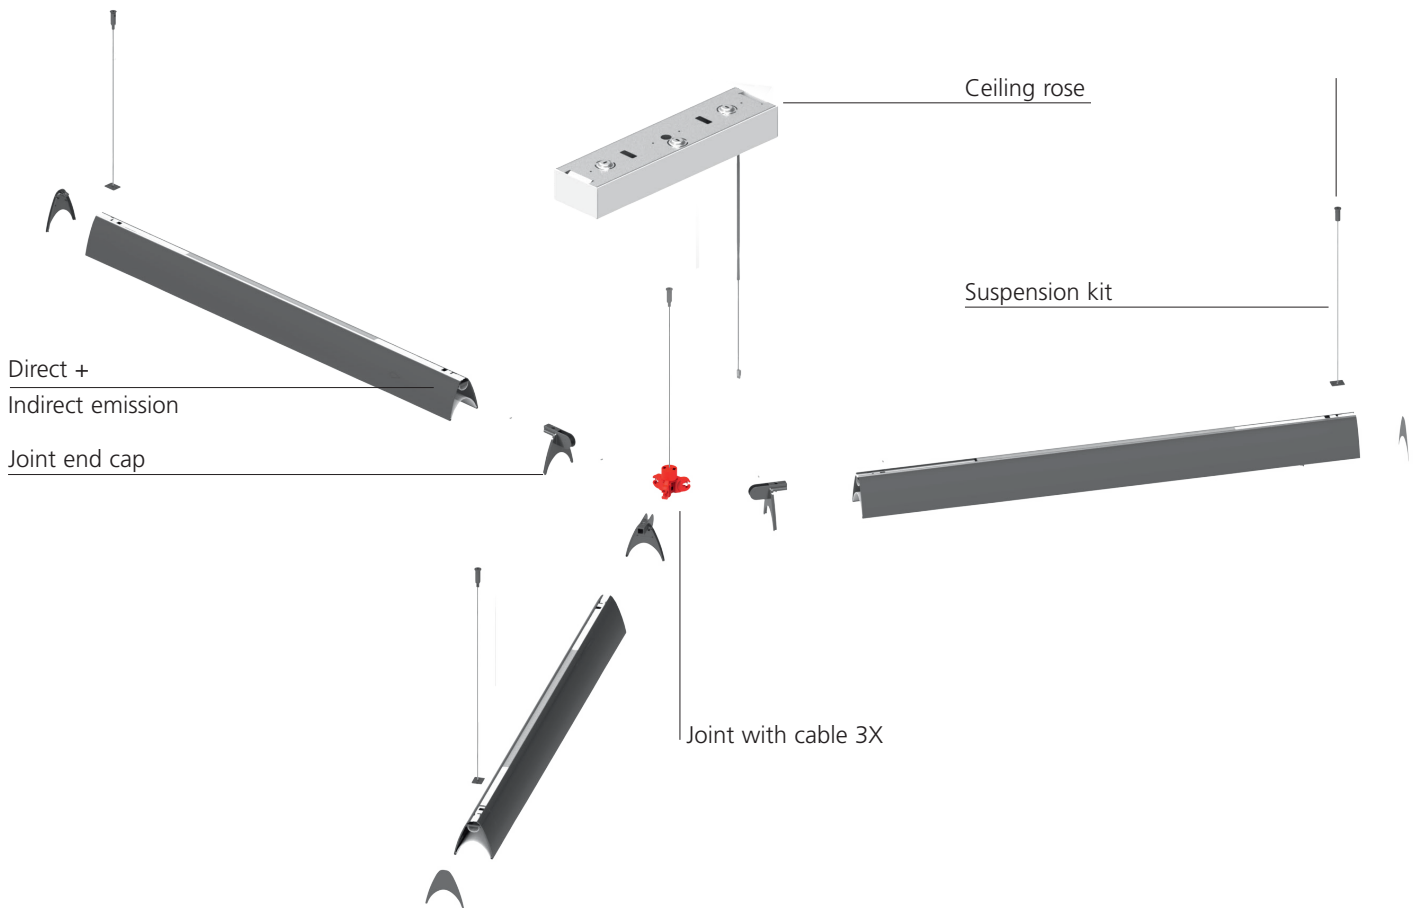

4 Modules

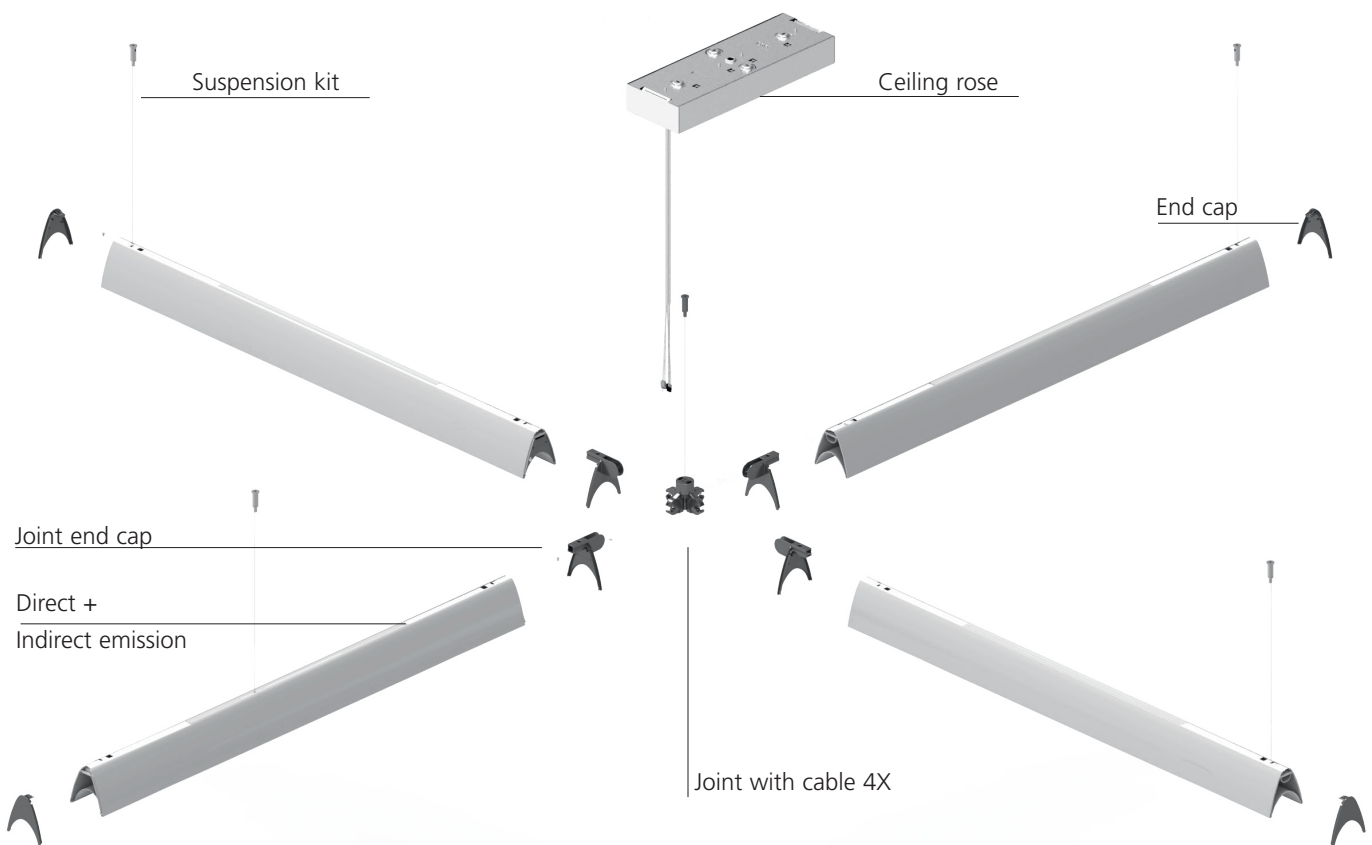

Series Y

White Black Silver



01



04



05

IP20




Diffuse direct emission

| Length | W | CRI | Flux | CCT |
|--------|------|-----|--------|-------|
| 1120mm | 37 W | 90 | 1845lm | 3000K |
| | | | 1942lm | 4000K |

Undimmable

| Code | € |
|------------------------|--------|
| AY000. 01/04/05 | 375,00 |
| AY005. 01/04/05 | 375,00 |



1120

Diffuse direct emission + batwing indirect emission

| Length | W | CRI | Flux | CCT |
|--------|------|-----|--------|-------|
| 1120mm | 55 W | 90 | 3621lm | 3000K |
| | | | 3811lm | 4000K |


Dimmable DALI

| Code | € |
|------------------------|--------|
| AY050. 01/04/05 | 450,00 |
| AY055. 01/04/05 | 450,00 |



89

89



Controlled direct emission

| Length | W | CRI | Flux | CCT |
|--------|------|-----|--------|-------|
| 1120mm | 37 W | 90 | 2143lm | 3000K |
| | | | 2255lm | 4000K |

Undimmable

| Code | € |
|------------------------|--------|
| AY010. 01/04/05 | 550,00 |
| AY015. 01/04/05 | 550,00 |



Controlled direct emission + batwing indirect emission

| Length | W | CRI | Flux | CCT |
|--------|------|-----|--------|-------|
| 1120mm | 55 W | 90 | 3919lm | 3000K |
| | | | 4125lm | 4000K |


Dimmable DALI

| Code | € |
|------------------------|--------|
| AY060. 01/04/05 | 645,00 |
| AY065. 01/04/05 | 645,00 |



89

89



White Black Silver Red Yellow



01



04



05



08



15

Accessories



Suspension Kit

| Code | € |
|----------------|-------|
| AY50000 | 18,00 |



Intermediate Suspension Kit

| | |
|----------------|-------|
| AY51000 | 28,00 |
|----------------|-------|



End cap


| | |
|---------------------|-------|
| AY600. 01/04 | 33,00 |
| 05/08/15 | 33,00 |



Joint End cap


| | |
|---------------------|-------|
| AY610. 01/04 | 33,00 |
| 05/08/15 | 33,00 |

Joint with cable




x 2 modules

| Code | € |
|--------------------|--------|
| AY700 01/04 | 150,00 |
| 05/08/15 | 150,00 |



x 3 modules


| | |
|--------------------|--------|
| AY710 01/04 | 170,00 |
| 05/08/15 | 170,00 |



x 4 modules


| | |
|--------------------|--------|
| AY720 01/04 | 190,00 |
| 05/08/15 | 190,00 |

Joint without cable




x 2 modules

| Code | € |
|--------------------|--------|
| AY730 01/04 | 100,00 |
| 05/08/15 | 100,00 |



x 3 modules

| | |
|--------------------|--------|
| AY740 01/04 | 120,00 |
| 05/08/15 | 120,00 |



x 4 modules

| | |
|--------------------|--------|
| AY750 01/04 | 140,00 |
| 05/08/15 | 140,00 |

Series Y

White



01

IP20




| Ceiling rose | Undimmable | Dimmable DALI |
|---|----------------|----------------|
| | Code | Code |
| Rose x 1 module | AY80101 | AY81101 |
| Rose x 2 modules | AY80201 | AY81201 |
| Rose x 3 modules - linear configuration | AY80301 | AY81301 |
| Rose x 3 modules - joint configuration | AY80401 | AY81401 |
| Rose x 4 modules - linear configuration | AY80501 | AY81501 |
| Rose x 4 modules - joint configuration | AY80601 | AY81601 |




Undimmable rose

Ceiling rose suitable for all undimmable modules configurations.
In case of 2 or more modules configurations, the power cable must be connected to the joint / between the modules.

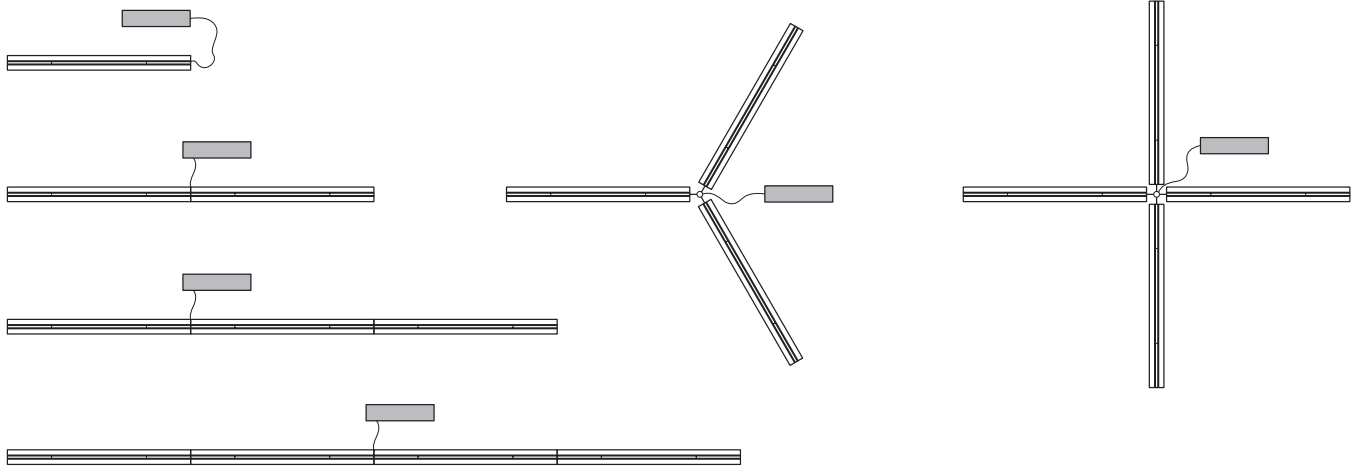


Dimmable rose

Ceiling rose suitable for max 2 dimmable modules configurations.

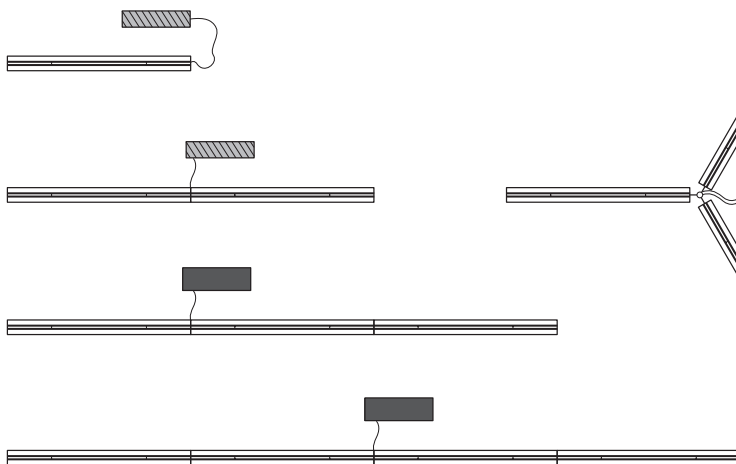


Dimmable rose

Ceiling rose suitable for 3 or 4 dimmable modules configurations.
In case of 2 or more modules configurations, the power cable must be connected to the joint / between the modules.

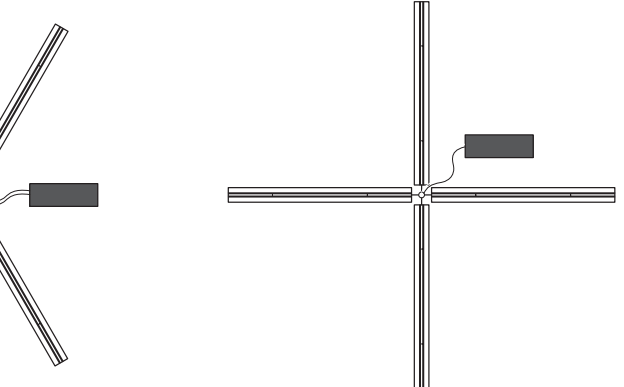



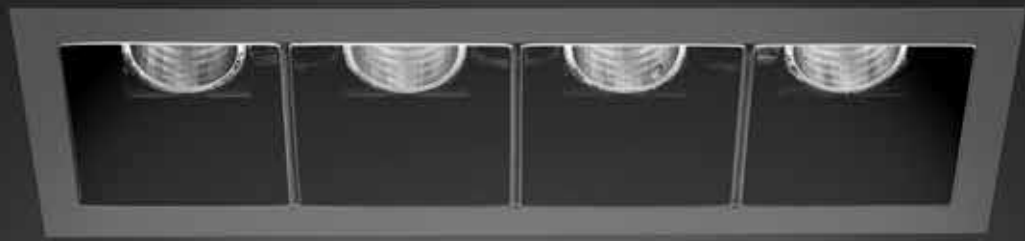

SHARP

Carlotta de Bevilacqua
2016



Sharp typology



RECESSED TRIM - TRIMLESS

A patented high-efficiency optical system combining a polynomial optical unit with geometric screening of the beam's viewing angle.

Highly uniform lighting and full emission control.


Total absence of any lighting defects, such as spots or multiple shadows.

Recess depth 60 mm.

Suited for 1 to 25 mm ceilings.

Available in the trim, trimless and SMD versions.

PATENT PENDING

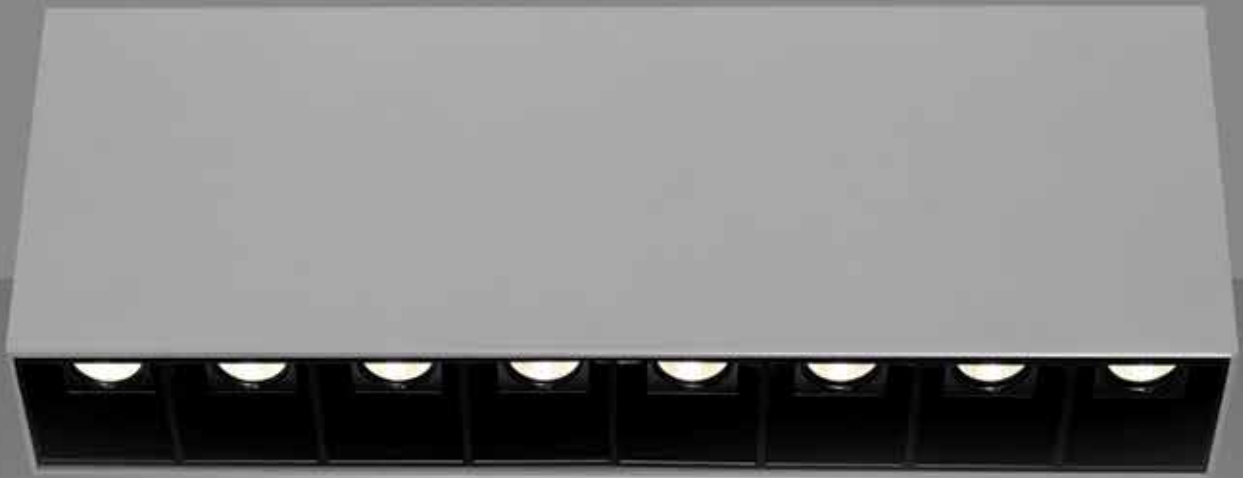

SMD

Sharp color temperatures

4000K




3000K




2700K




Sharp trimless - trim

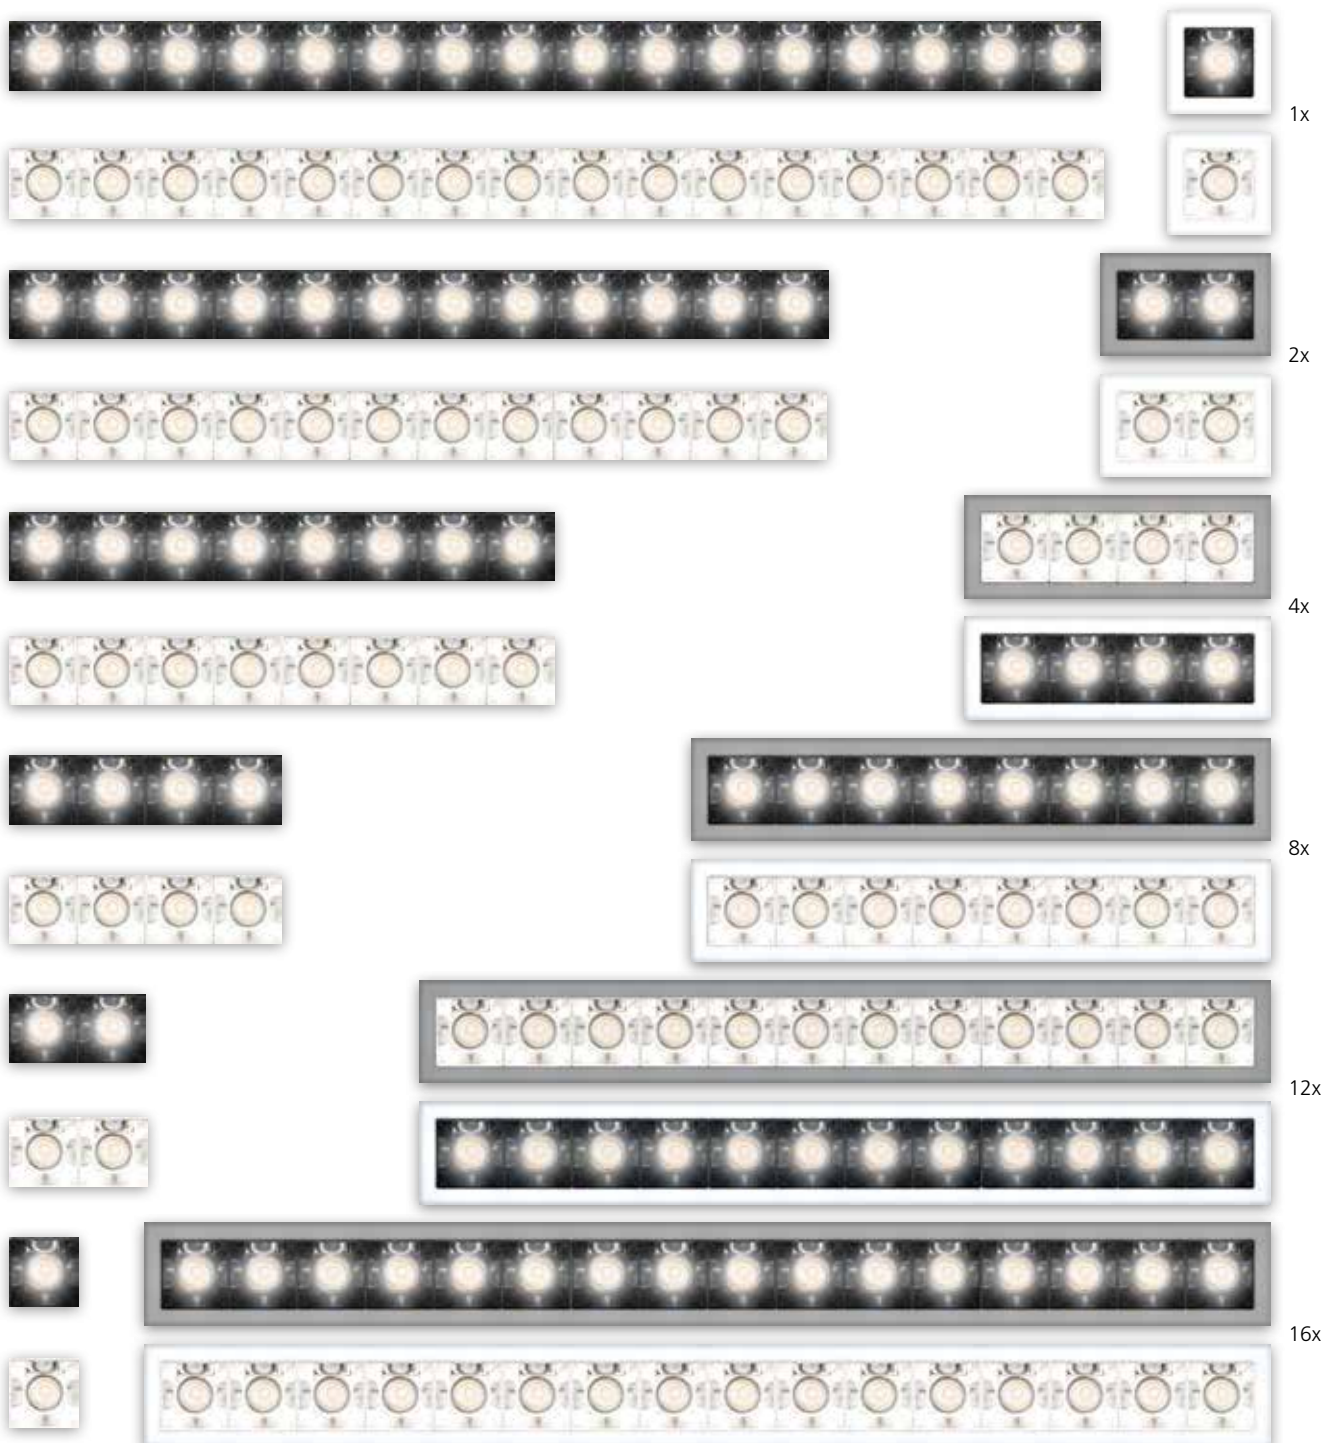



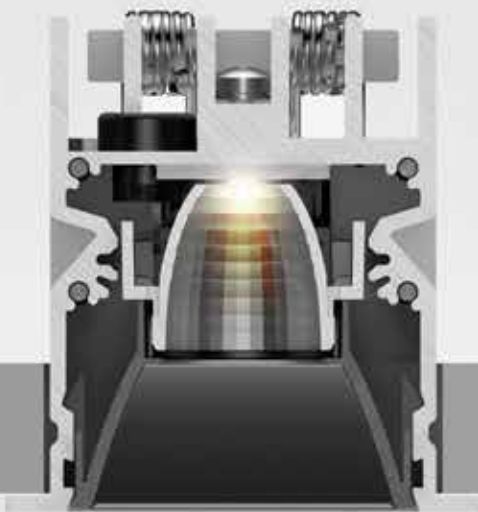


SHARP TRIM

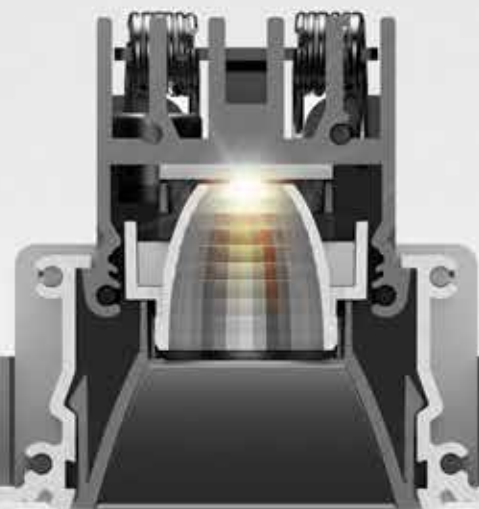


SHARP TRIMLESS

Minimum distance from the wall



Minimum distance between the devices

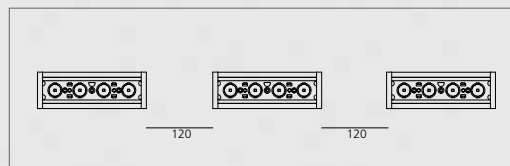



Sharp trim



White Black



01



04

S



F



WF





MacAdam 2SDCM
Life L70 (6K) 50000h

Driver 900mA SELV supplied separately.

IP20



| | W | CRI | Beam | Flux | CCT | Code | € | | | |
|----------------|---------|--------|---------------|---------|---------------------|---------------------|---------|--------|---------------------|--------|
| 1 optic unit | 3 W | >90 | 17° | 200 lm | 2700 K | AF000. 01/05 | 99,00 | | | |
| | | | | 3000 K | AF003. 01/05 | 99,00 | | | | |
| | | | 34° | 215 lm | 2700 K | AF001. 01/05 | 99,00 | | | |
| | | | | 3000 K | AF004. 01/05 | 99,00 | | | | |
| | | | 54° | 210 lm | 2700 K | AF002. 01/05 | 99,00 | | | |
| | | | | 3000 K | AF005. 01/05 | 99,00 | | | | |
| 2 optic units | 5,5 W | >90 | 17° | 400 lm | 2700 K | AF050. 01/05 | 110,00 | | | |
| | | | | 3000 K | AF053. 01/05 | 110,00 | | | | |
| | | | 34° | 431 lm | 2700 K | AF051. 01/05 | 110,00 | | | |
| | | | | 3000 K | AF054. 01/05 | 110,00 | | | | |
| | | | 54° | 420 lm | 2700 K | AF052. 01/05 | 110,00 | | | |
| | | | | 3000 K | AF055. 01/05 | 110,00 | | | | |
| 4 optic units | 11 W | >90 | 17° | 800 lm | 2700 K | AF100. 01/05 | 135,00 | | | |
| | | | | 3000 K | AF103. 01/05 | 135,00 | | | | |
| | | | | 856 lm | 4000 K | AF106. 01/05 | 135,00 | | | |
| | | | | 3000 K | AF101. 01/05 | 135,00 | | | | |
| | | | 34° | 862 lm | 2700 K | AF104. 01/05 | 135,00 | | | |
| | | | | 3000 K | AF107. 01/05 | 135,00 | | | | |
| | | | 54° | 922 lm | 4000 K | AF102. 01/05 | 135,00 | | | |
| | | | | 840 lm | 2700 K | AF105. 01/05 | 135,00 | | | |
| | | | 3000 K | 899 lm | 4000 K | AF108. 01/05 | 135,00 | | | |
| | | | | 3000 K | AF150. 01/05 | 195,00 | | | | |
| | | | 8 optic units | 22 W | >90 | 17° | 1600 lm | 3000 K | AF153. 01/05 | 195,00 |
| | | | | | | | 1713 lm | 4000 K | AF151. 01/05 | 195,00 |
| 34° | 1724 lm | 3000 K | | | | AF154. 01/05 | 195,00 | | | |
| | 1844 lm | 4000 K | | | | AF152. 01/05 | 195,00 | | | |
| 54° | 1681 lm | 3000 K | | | | AF155. 01/05 | 195,00 | | | |
| | 1798 lm | 4000 K | | | | AF200. 01/05 | 255,00 | | | |
| 12 optic units | 33 W | >90 | 17° | 2401 lm | 3000 K | AF203. 01/05 | 255,00 | | | |
| | | | | 2569 lm | 4000 K | AF201. 01/05 | 255,00 | | | |
| | | | 34° | 2585 lm | 3000 K | AF204. 01/05 | 255,00 | | | |
| | | | | 2766 lm | 4000 K | AF202. 01/05 | 255,00 | | | |
| | | | 54° | 2521 lm | 3000 K | AF205. 01/05 | 255,00 | | | |
| | | | | 2698 lm | 4000 K | AF250. 01/05 | 315,00 | | | |
| 16 optic units | 44 W | >90 | 17° | 3201 lm | 3000 K | AF253. 01/05 | 315,00 | | | |
| | | | | 3425 lm | 4000 K | AF251. 01/05 | 315,00 | | | |
| | | | 34° | 3447 lm | 3000 K | AF254. 01/05 | 315,00 | | | |
| | | | | 3688 lm | 4000 K | AF252. 01/05 | 315,00 | | | |
| | | | 54° | 3362 lm | 3000 K | AF255. 01/05 | 315,00 | | | |
| | | | | 3597 lm | 4000 K | | | | | |

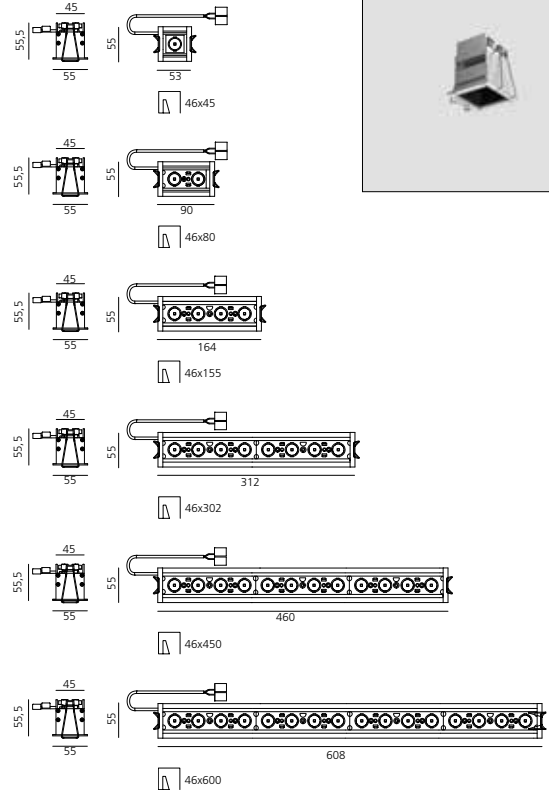

Screen




1X

2X


4X

| Code | € |
|---------------------|------|
| AF950. 01/04 | 6,00 |
| AF951. 01/04 | 7,00 |
| AF952. 01/04 | 8,00 |




| Driver | Vac | L _{mm} | W _{mm} | H _{mm} | Optic units | Size recessed (mm) | | Code | € |
|--------------|---------|-----------------|-----------------|-----------------|-------------------|---------------------|--------------|--------|-------|
| 7,2 W 900mA | 220-240 | 76 | 32 | 22 | 1x / 2x | 80 / 60 | Non dimmable | DV1001 | 20,00 |
| 19,8 W 900mA | 220-240 | 125 | 38 | 23 | 4x | 60 | Non dimmable | DV1002 | 27,00 |
| 32 W 900mA | 220-240 | 129,5 | 42 | 30 | 8x | 80 | Non dimmable | DV1004 | 35,00 |
| 50 W 900mA | 220-240 | 124 | 79 | 22 | 12x / 16x | 80 | Non dimmable | DV1005 | 57,00 |
| 40 W 900mA | 220-240 | 97 | 43 | 30 | 8x / 16x | 80 | Non dimmable | DV1006 | 32,00 |
| 25,2 W 900mA | 220-240 | 164 | 38 | 24,5 | 1x / 2x / 4x / 8x | 150 / 130 / 80 / 60 | DALI | DV1003 | 46,00 |
| 55 W 900mA | 220-240 | 110 | 75 | 25,7 | 12x / 16x | 80 / 80 | DALI | DV1007 | 67,00 |

Sharp trimless

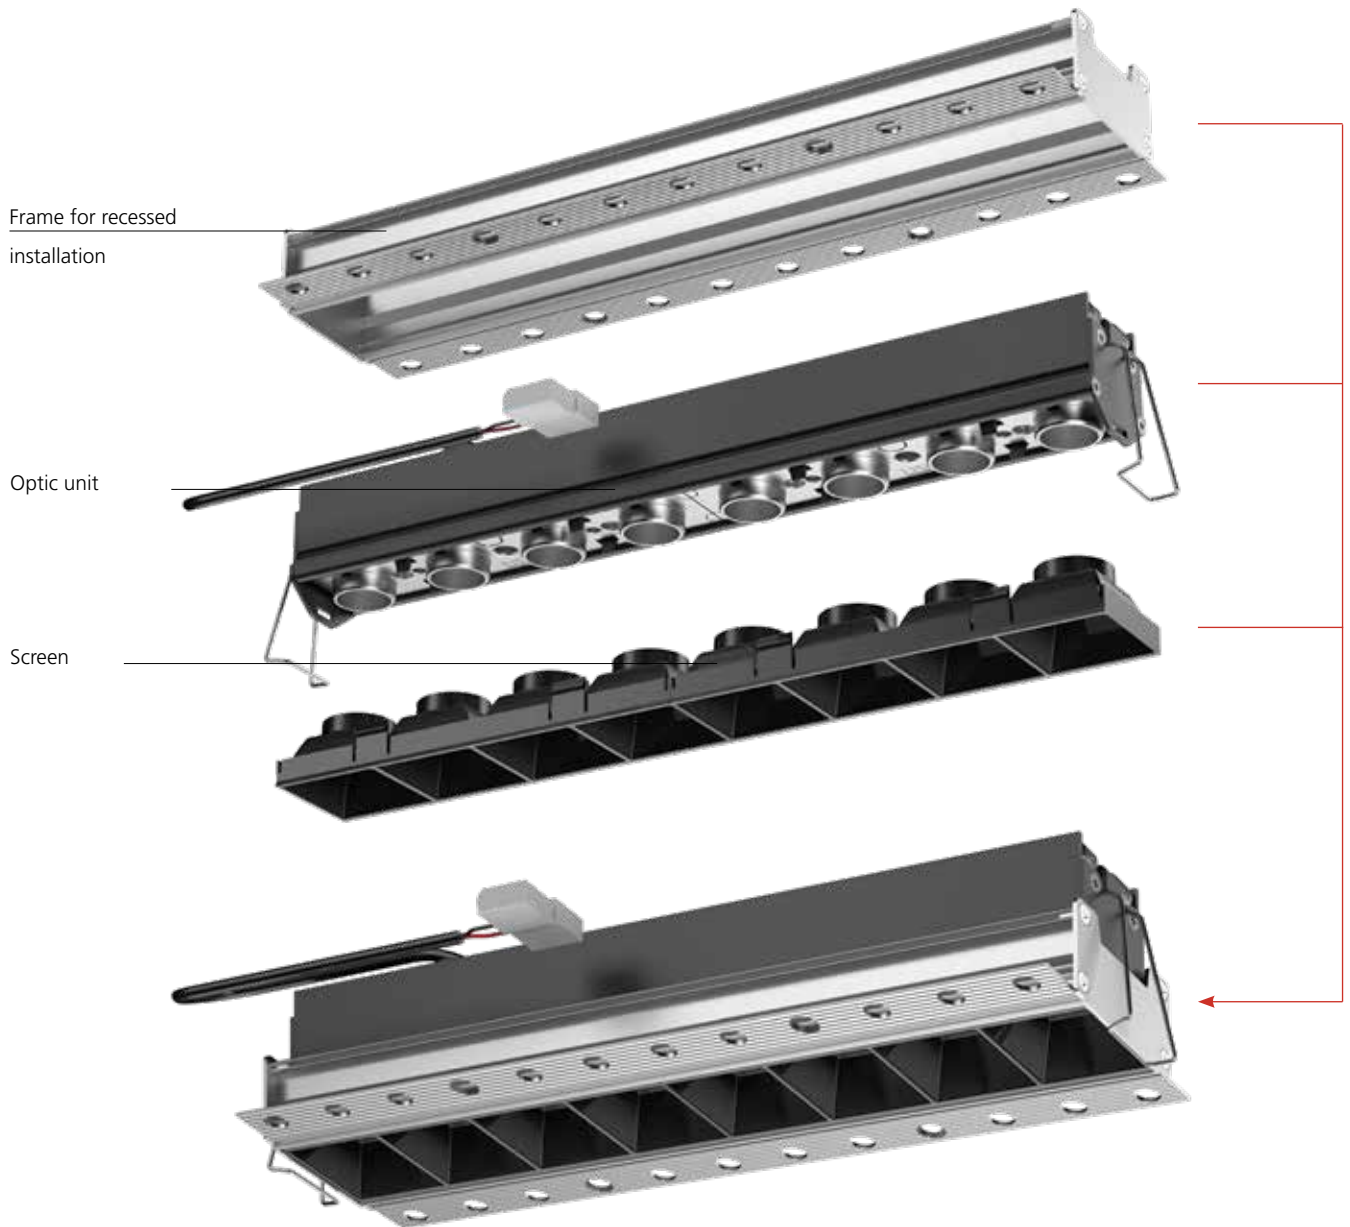

| Driver | Vac | L _{mm} | W _{mm} | H _{mm} | Optic units | Size recessed (mm) | | Code | € |
|--------------|---------|-----------------|-----------------|-----------------|-------------------|---------------------|--------------|---------------|-------|
| 7,2 W 900mA | 220-240 | 76 | 32 | 22 | 1x / 2x | 80 / 60 | Non dimmable | DV1001 | 20,00 |
| 19,8 W 900mA | 220-240 | 125 | 38 | 23 | 4x | 60 | Non dimmable | DV1002 | 27,00 |
| 32 W 900mA | 220-240 | 129,5 | 42 | 30 | 8x | 80 | Non dimmable | DV1004 | 35,00 |
| 50 W 900mA | 220-240 | 124 | 79 | 22 | 12x / 16x | 80 | Non dimmable | DV1005 | 57,00 |
| 40 W 900mA | 220-240 | 97 | 43 | 30 | 8x / 16x | 80 | Non dimmable | DV1006 | 32,00 |
| 25,2 W 900mA | 220-240 | 164 | 38 | 24,5 | 1x / 2x / 4x / 8x | 150 / 130 / 80 / 60 | DALI | DV1003 | 46,00 |
| 55 W 900mA | 220-240 | 110 | 75 | 25,7 | 12x / 16x | 80 / 80 | DALI | DV1007 | 67,00 |



MacAdam 2SDCM
Life L70 (6K) 50000h



IP20

Driver 900mA SELV supplied separately.



LED optic unit

| | W | CRI | Beam | Flux | CCT | Code | € |
|----------------|-------|--------|----------------|---------|--------|----------------|--------|
| 1 optic unit | 3 W | >90 | 17° | 200 lm | 2700 K | AF50000 | 97,00 |
| | | | | | 3000 K | AF50300 | 97,00 |
| | | | 34° | 215 lm | 2700 K | AF50100 | 97,00 |
| | | | | | 3000 K | AF50400 | 97,00 |
| | | | 54° | 210 lm | 2700 K | AF50200 | 97,00 |
| | | 3000 K | AF50500 | 97,00 | | | |
| 2 optic units | 5,5 W | >90 | 17° | 400 lm | 2700 K | AF55000 | 108,00 |
| | | | | | 3000 K | AF55300 | 108,00 |
| | | | 34° | 431 lm | 2700 K | AF55100 | 108,00 |
| | | | | | 3000 K | AF55400 | 108,00 |
| | | | 54° | 420 lm | 2700 K | AF55200 | 108,00 |
| | | 3000 K | AF55500 | 108,00 | | | |
| 4 optic units | 11 W | >90 | 17° | 800 lm | 2700 K | AF60000 | 131,00 |
| | | | | | 3000 K | AF60300 | 131,00 |
| | | | | 856 lm | 4000 K | AF60600 | 131,00 |
| | | | 34° | 862 lm | 2700 K | AF60100 | 131,00 |
| | | | | | 3000 K | AF60400 | 131,00 |
| | | | | 922 lm | 4000 K | AF60700 | 131,00 |
| | | | 54° | 840 lm | 2700 K | AF60200 | 131,00 |
| | | | | | 3000 K | AF60500 | 131,00 |
| | | | | | 3000 K | AF60800 | 131,00 |
| | | | | | 4000 K | AF65000 | 190,00 |
| 8 optic units | 22 W | >90 | 17° | 1600 lm | 3000 K | AF65000 | 190,00 |
| | | | | 1713 lm | 4000 K | AF65300 | 190,00 |
| | | | 34° | 1724 lm | 3000 K | AF65100 | 190,00 |
| | | | | 1844 lm | 4000 K | AF65400 | 190,00 |
| | | | 54° | 1681 lm | 3000 K | AF65200 | 190,00 |
| | | 4000 K | AF65500 | 190,00 | | | |
| 12 optic units | 33 W | >90 | 17° | 2401 lm | 3000 K | AF70000 | 248,00 |
| | | | | 2569 lm | 4000 K | AF70300 | 248,00 |
| | | | 34° | 2585 lm | 3000 K | AF70100 | 248,00 |
| | | | | 2766 lm | 4000 K | AF70400 | 248,00 |
| | | | 54° | 2521 lm | 3000 K | AF70200 | 248,00 |
| | | 4000 K | AF70500 | 248,00 | | | |
| 16 optic units | 44 W | >90 | 17° | 3201 lm | 3000 K | AF75000 | 308,00 |
| | | | | 3425 lm | 4000 K | AF75300 | 308,00 |
| | | | 34° | 3447 lm | 3000 K | AF75100 | 308,00 |
| | | | | 3688 lm | 4000 K | AF75400 | 308,00 |
| | | | 54° | 3362 lm | 3000 K | AF75200 | 308,00 |
| | | 4000 K | AF75500 | 308,00 | | | |

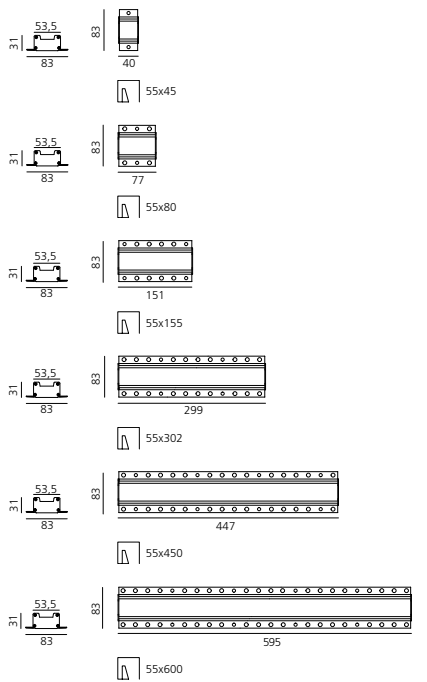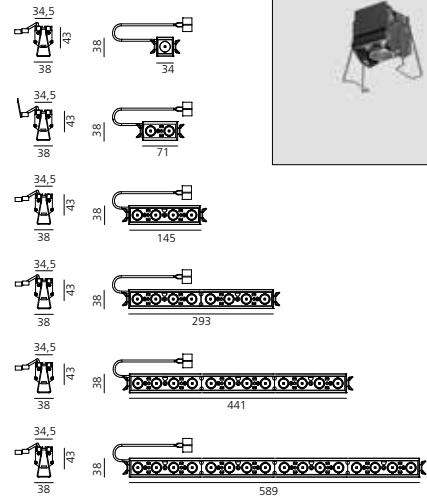

Frame for recessed installation




| | Code | € |
|-----|----------------|-------|
| 1X | AF90000 | 27,00 |
| 2X | AF90100 | 30,00 |
| 4X | AF90200 | 37,00 |
| 8X | AF90300 | 42,00 |
| 12X | AF90400 | 46,00 |
| 16X | AF90500 | 49,00 |

Screen



| | Code | € |
|----|---------------------|------|
| 1X | AF950. 01/04 | 6,00 |
| 2X | AF951. 01/04 | 7,00 |
| 4X | AF952. 01/04 | 8,00 |




Sharp SMD






Sharp SMD

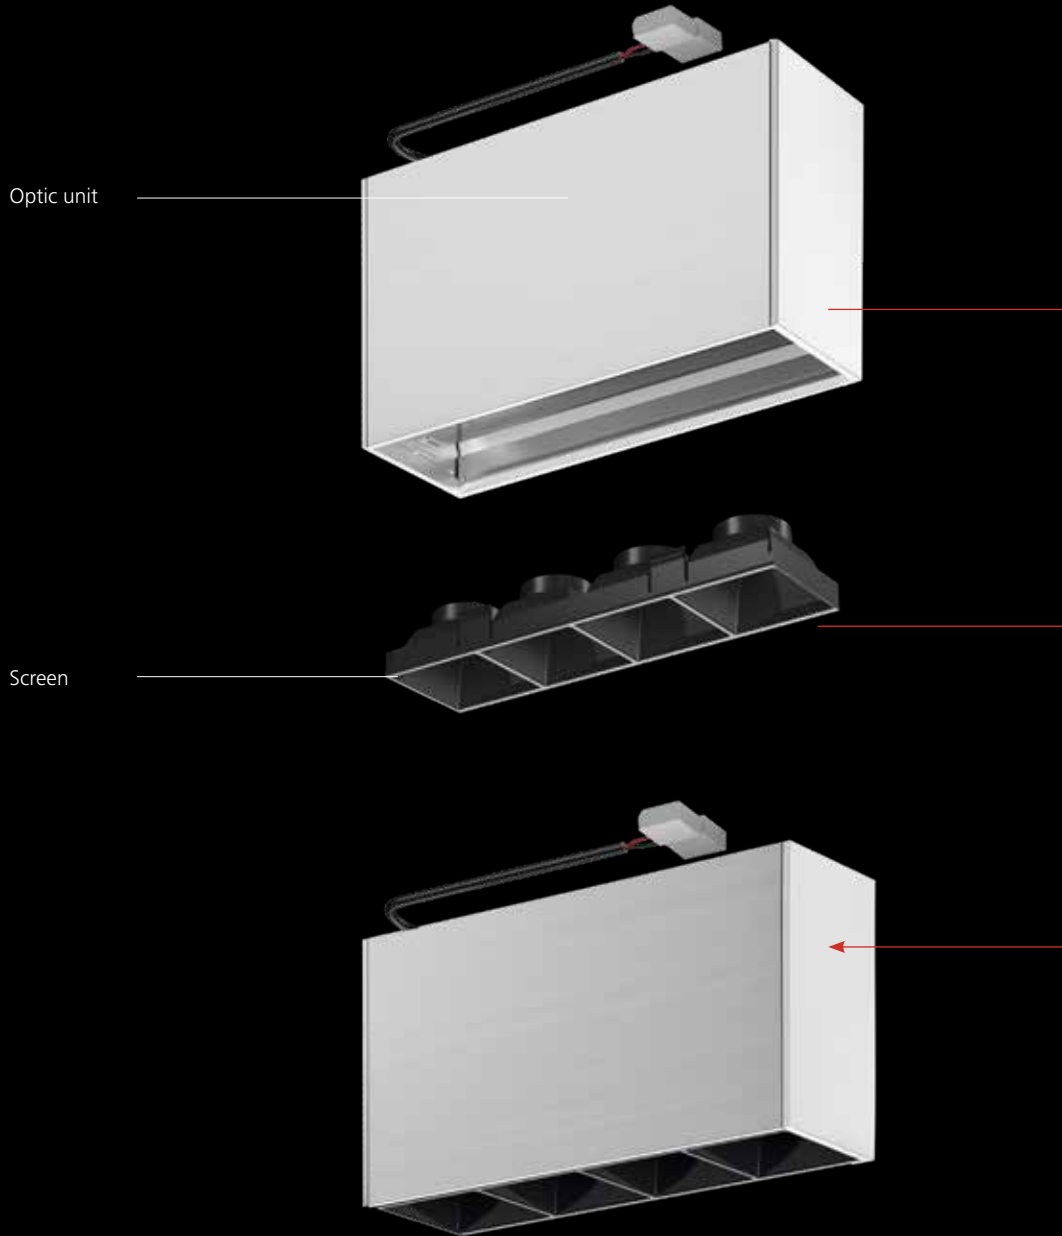

White Black Silver



S F WF







MacAdam 2SDCM
Life L70 (6K) 50000h

Driver 900mA SELV supplied separately.

IP20



| | W | CRI | Beam | Flux | CCT | Code | € |
|---------------|-------|--------|------------------------|--------|--------|------------------------|--------|
| 1 optic unit | 3 W | >90 | 17° | 200 lm | 2700 K | AF310. 01/04/05 | 141,00 |
| | | | | | 3000 K | AF313. 01/04/05 | 141,00 |
| | | | 34° | 215 lm | 2700 K | AF311. 01/04/05 | 141,00 |
| | | | | | 3000 K | AF314. 01/04/05 | 141,00 |
| | | | 54° | 210 lm | 2700 K | AF312. 01/04/05 | 141,00 |
| | | 3000 K | AF315. 01/04/05 | 141,00 | | | |
| 2 optic units | 5,5 W | >90 | 17° | 400 lm | 2700 K | AF360. 01/04/05 | 151,00 |
| | | | | | 3000 K | AF363. 01/04/05 | 151,00 |
| | | | 34° | 431 lm | 2700 K | AF361. 01/04/05 | 151,00 |
| | | | | | 3000 K | AF364. 01/04/05 | 151,00 |
| | | | 54° | 420 lm | 2700 K | AF362. 01/04/05 | 151,00 |
| | | 3000 K | AF365. 01/04/05 | 151,00 | | | |
| 4 optic units | 11 W | >90 | 17° | 800 lm | 2700 K | AF410. 01/04/05 | 171,00 |
| | | | | | 3000 K | AF413. 01/04/05 | 171,00 |
| | | | 34° | 862 lm | 2700 K | AF411. 01/04/05 | 171,00 |
| | | | | | 3000 K | AF414. 01/04/05 | 171,00 |
| | | | 54° | 840 lm | 2700 K | AF412. 01/04/05 | 171,00 |
| | | 3000 K | AF415. 01/04/05 | 171,00 | | | |




Screen




1X
2X
4X

| Code | € |
|---------------------|------|
| AF950. 01/04 | 6,00 |
| AF951. 01/04 | 7,00 |
| AF952. 01/04 | 8,00 |



| Driver | Vac | L _{mm} | W _{mm} | H _{mm} | Optic units | Size recessed (mm) | | Code | € |
|--------------|---------|-----------------|-----------------|-----------------|--------------|--------------------|--------------|--------|-------|
| 7,2 W 900mA | 220-240 | 76 | 32 | 22 | 1x / 2x | 80 / 60 | Non dimmable | DV1001 | 20,00 |
| 19,8 W 900mA | 220-240 | 125 | 38 | 23 | 4x | 60 | Non dimmable | DV1002 | 27,00 |
| 25,2 W 900mA | 220-240 | 164 | 38 | 24,5 | 1x / 2x / 4x | 150 / 130 / 80 | DALI | DV1003 | 46,00 |

Sharp SMD

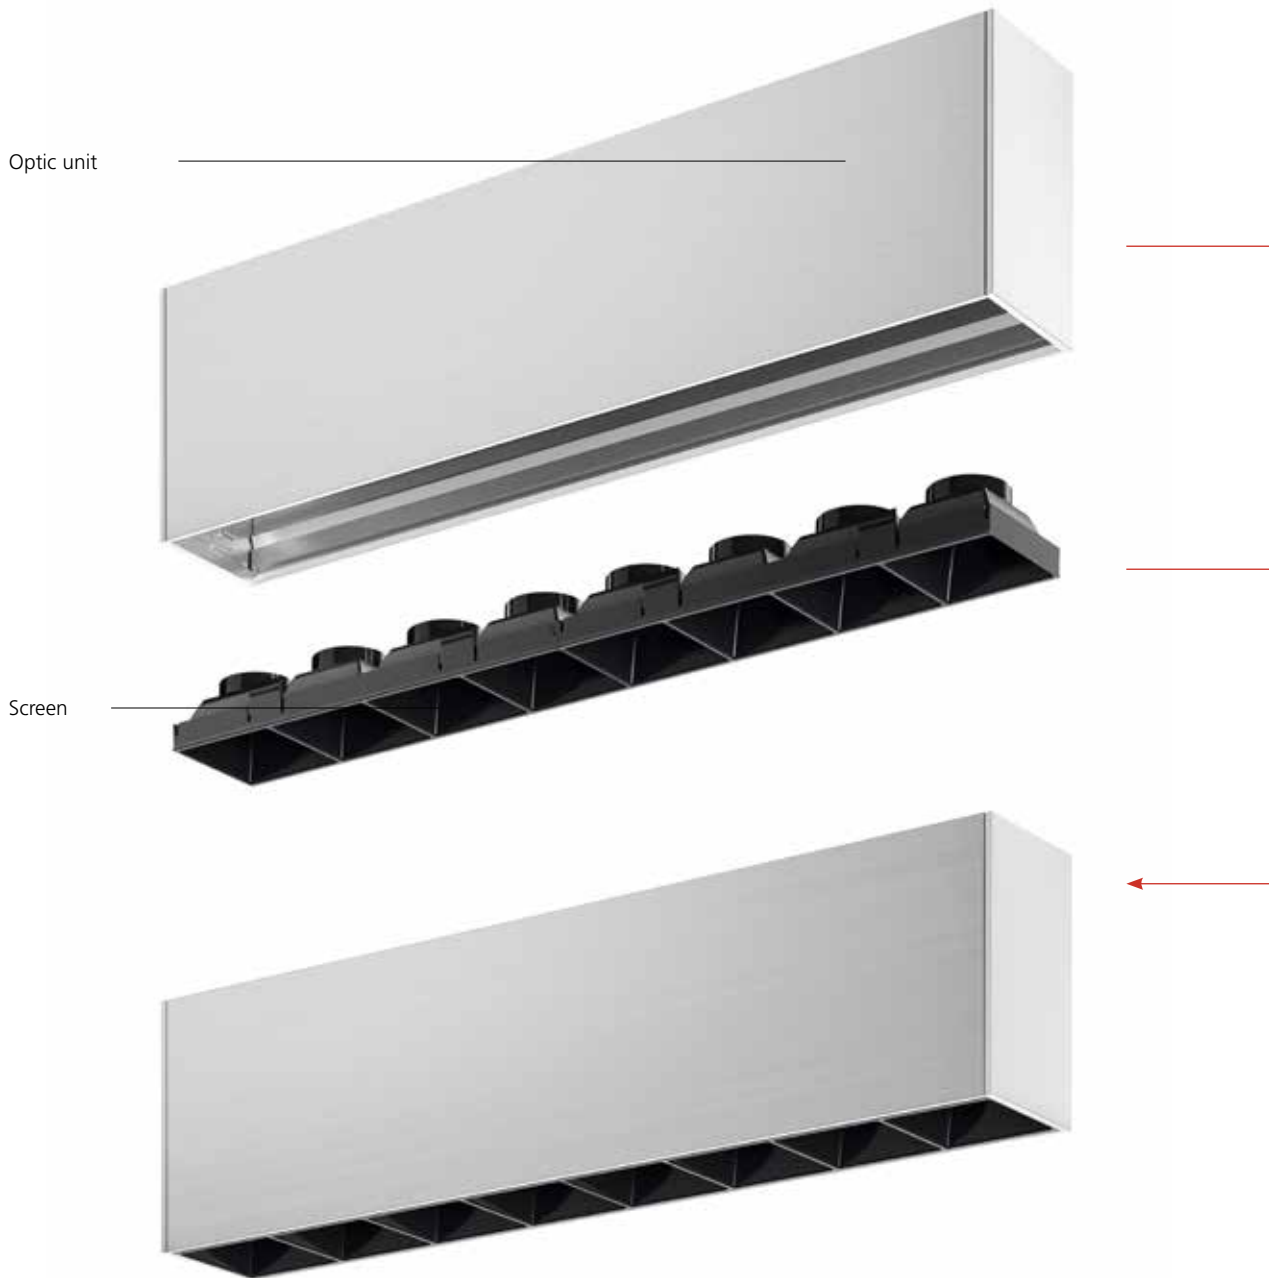

White Black Silver



01



04



05

S



F



WF




MacAdam 2SDCM
Life L70 (6K) 50000h

IP20



| | W | CRI | Beam | Flux | CCT | Undimmable | | Dimmable DALI | |
|----------------|---------|--------|---------------|-----------------|---------------|-----------------|-----------------|---------------|-----------------|
| | | | | | | Code | € | Code | € |
| 8 optic units | 22 W | >90 | 17° | 1600 lm | 3000 K | AF460. | 01/04/05 248,00 | AF470. | 01/04/05 265,00 |
| | | | | 1713 lm | 4000 K | AF463. | 01/04/05 248,00 | AF473. | 01/04/05 265,00 |
| | | | 34° | 1724 lm | 3000 K | AF461. | 01/04/05 248,00 | AF471. | 01/04/05 265,00 |
| | | | | 1844 lm | 4000 K | AF464. | 01/04/05 248,00 | AF474. | 01/04/05 265,00 |
| | | | | 1681 lm | 3000 K | AF462. | 01/04/05 248,00 | AF472. | 01/04/05 265,00 |
| 12 optic units | 33 W | >90 | 17° | 1798 lm | 4000 K | AF465. | 01/04/05 248,00 | AF475. | 01/04/05 265,00 |
| | | | | 2401 lm | 3000 K | AF810. | 01/04/05 318,00 | AF820. | 01/04/05 365,00 |
| | | | 34° | 2569 lm | 4000 K | AF813. | 01/04/05 318,00 | AF823. | 01/04/05 365,00 |
| | | | | 2585 lm | 3000 K | AF811. | 01/04/05 318,00 | AF821. | 01/04/05 365,00 |
| | | | | 2766 lm | 4000 K | AF814. | 01/04/05 318,00 | AF824. | 01/04/05 365,00 |
| 16 optic units | 44 W | >90 | 17° | 2521 lm | 3000 K | AF812. | 01/04/05 318,00 | AF822. | 01/04/05 365,00 |
| | | | | 2698 lm | 4000 K | AF815. | 01/04/05 318,00 | AF825. | 01/04/05 365,00 |
| | | | 34° | 3201 lm | 3000 K | AF860. | 01/04/05 375,00 | AF870. | 01/04/05 425,00 |
| | | | | 3425 lm | 4000 K | AF863. | 01/04/05 375,00 | AF873. | 01/04/05 425,00 |
| | | | | 3447 lm | 3000 K | AF861. | 01/04/05 375,00 | AF871. | 01/04/05 425,00 |
| 54° | 3688 lm | 4000 K | AF864. | 01/04/05 375,00 | AF874. | 01/04/05 425,00 | | | |
| | 3362 lm | 3000 K | AF862. | 01/04/05 375,00 | AF872. | 01/04/05 425,00 | | | |
| | 3597 lm | 4000 K | AF865. | 01/04/05 375,00 | AF875. | 01/04/05 425,00 | | | |




Screen



4X

Code €
AF952. 01/04 8,00



Vector, A.24 and A.39 are compatible with **Artemide App**

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both Design and Architectural Catalogues.





Download Artemide App
and find more information on
[artemide.com](https://www.artemide.com)

Headquarters

Artemide S.p.A.

Via Bergamo, 18
20010 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Communication and Marketing Department

Via Canova, 34
20145 Milan (MI), Italy
Tel. +39 02.349611
communication@artemide.com
artemide.com

For information regarding distributors and
points of sale for Middle East & Africa
countries, please email:
info@artemide.com

Artemide S.p.A.

si riserva la facoltà di modificare, in qualunque
momento e senza preavviso, le caratteristiche
tecniche degli elementi illustrati nel presente
catalogo.

Artemide S.p.A.

reserves the right to change, at any time and
without prior warning, the technical specifications
of any product illustrated in this catalogue.

Artemide S.p.A.

se réserve le droit de modifier, à n'importe
quel moment et sans préavis, les caractéristiques
techniques des éléments illustrés dans ce
catalogue.

Artemide S.p.A.

behält sich das Recht vor jederzeit und ohne
Ankündigung die technischen Daten der im
Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.

se reserva la facultad de modificar, en cualquier
y sin aviso previo, las características técnicas
de los elementos ilustrados en el presente
catálogo.



