



Turn Around family

Carlotta de Bevilacqua

Artemide®

**turn around
family**

Turn Around

Carlotta de Bevilacqua
2019

Turn Around inverts the approach to the light system, starting from the principles of sustainability, reduction, lightness, integration, optoelectronic intelligence, application freedom and interaction.

It is a combination of different structural and lighting solutions that adapt to last-minute space thanks to its minimal section.

It is a composition based on a very small track, with a patented section dictated by the standard thickness of plasterboard, meaning it can be inserted into the available space in any situation. Various linear, 90° angle and curved modules can be combined with electrical and mechanical continuity, availing of the utmost freedom to create ever different shapes.

→ PATENT OF INVENTION: ELECTRO-MECHANICAL SECTION

→ PATENT OF INVENTION: SHARP



Artemide
App



For further information on Turn Around
↪ visit [artemide.com](https://www.artemide.com)



Turn Around is an innovative system

The freedom to design light in space is ensured by the flexibility to combine different geometries within the structure and also by the possibility to integrate different performances.

Indeed, the same track can accommodate a linear module for diffused light, plus sharpening, spot and suspension modules.



Turn Around
is extremely
flexible

The image features a dark, textured background. A prominent, curved, metallic-looking band sweeps across the upper right portion of the frame. On the left side, a small, cylindrical object is positioned, appearing to be part of or attached to the band. The overall aesthetic is sleek and modern.

Geometrical flexibility

Performance flexibility

Management flexibility

Reduce to innovate

Energetic Infrastructure


A single continuous energetic infrastructure that accommodates various light performances.

48V

Powered at 48V, there are no practical length limits of the system but only of installed power.

Electronic Bridge

An “invisible” joint permits to transfer power and D.Art from one section to the following, allowing the possibility to insert endless diffused flexible modules.

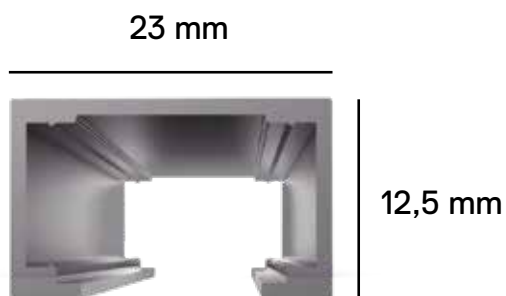



Asserting one's spatial freedom


Challenging the fundamental sustainability

h 12.5 X 23 mm for Recessed version

Profile dimensions can be integrated into the standard plasterboard thickness without interfering with the structural warping.

Recessed / SMD / Suspension

The profile is integrated into the space in the built-in, ceiling and suspension versions.

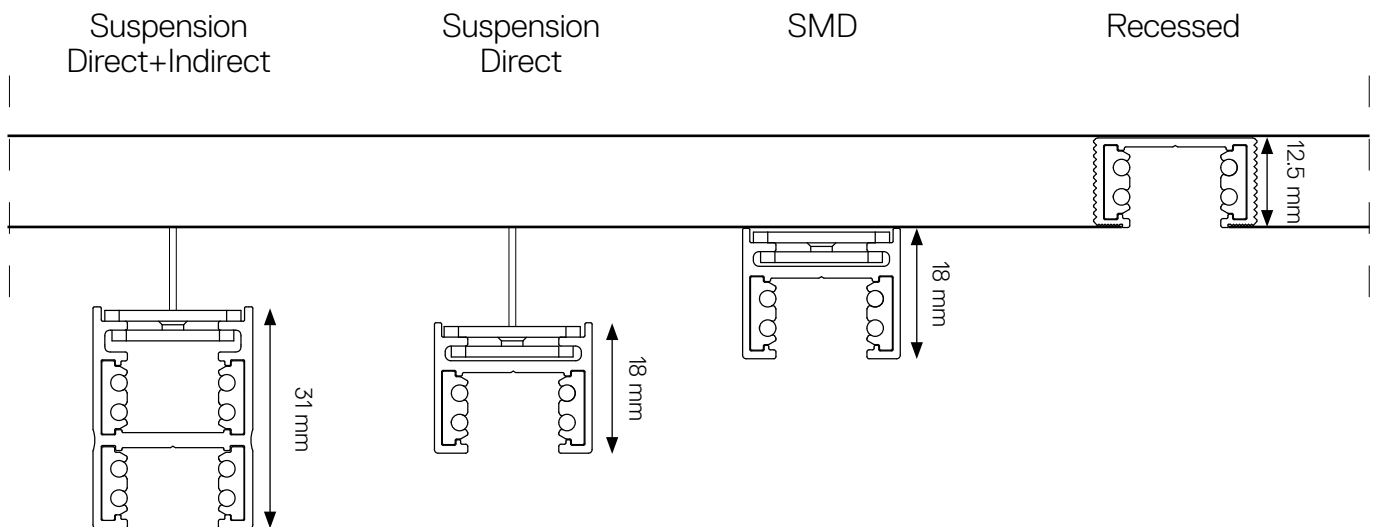


→ False ceiling scheme

Structural Warping

Structural Warping

Plasterboard - 12.5 mm thickness

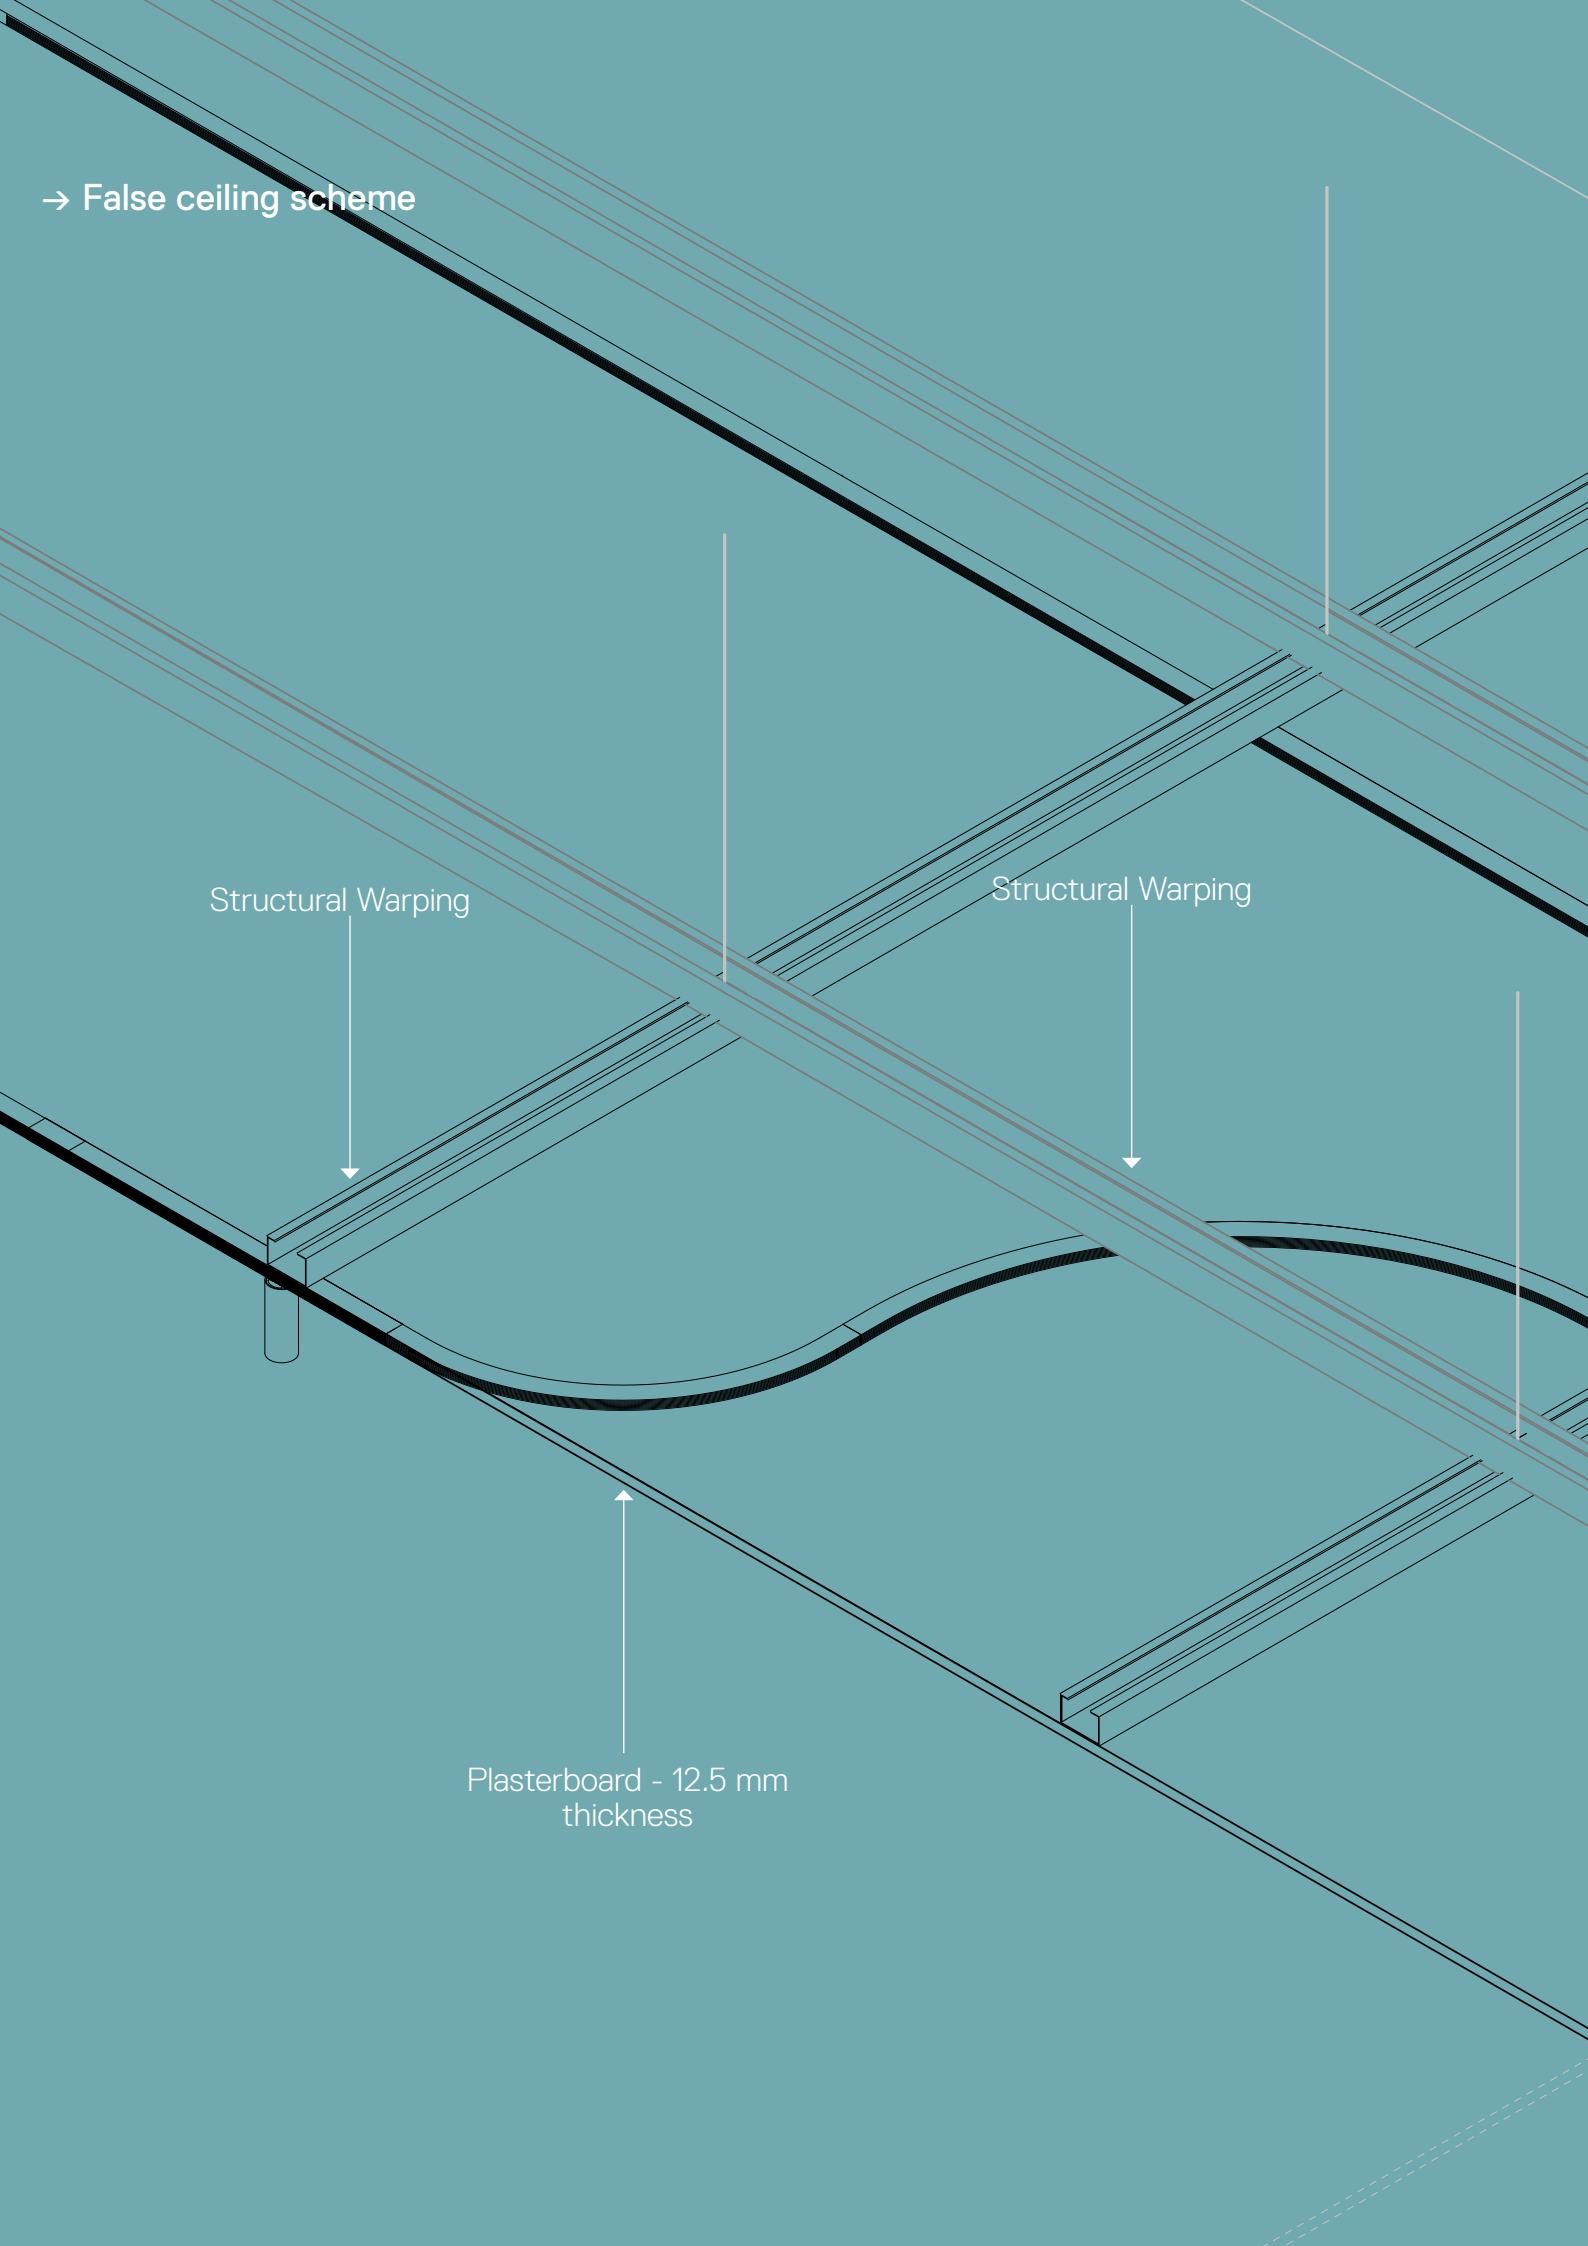

Turn Around infrastructure

Integrating different performances

Track 48V

23 x h 12,5 mm (Recessed)

22 x h 18 mm (SMD, Suspension Direct)

22 x h 31 mm (Suspension Direct+Indirect)


1000/2000/3000 mm

- Black (Recessed)
- Titanium (SMD, Suspended)

Angular and curved elements


Curves: 90°

Rays: 700 mm, 450 mm, 270 mm

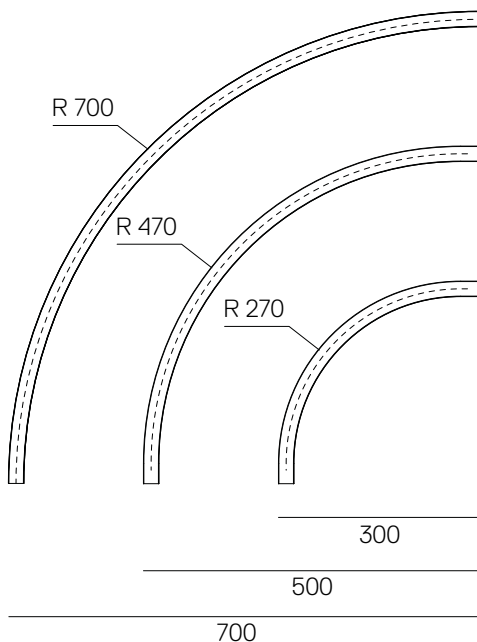

Curves: 60°

Rays: 700 mm, 450 mm, 270 mm

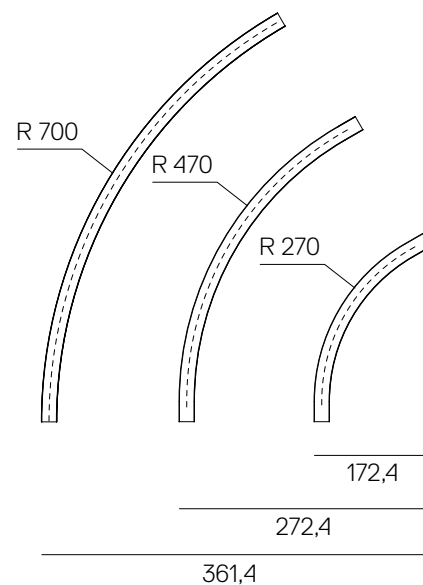

Linear elements Recessed



1000 mm

2000 mm

3000 mm

Linear elements SMD - Suspension direct emission



1000 mm

2000 mm

3000 mm

Linear elements Suspension direct + indirect emission




1000 mm

2000 mm

3000 mm

Curves: 45°

Rays: 700 mm, 450 mm, 270 mm

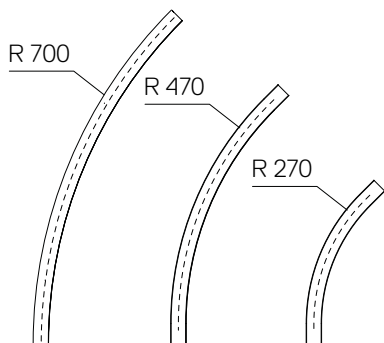


116,4

175

221,2

90° Angle


same plane recessed



50

90° Angle

same plane
suspension direct
emission and SMD



18


75

50

50

90° Angle

same plane
suspension direct +
indirect emission



25

75

50

50


One body for all the light appliances



Vector Track

Vector Pendant

Square

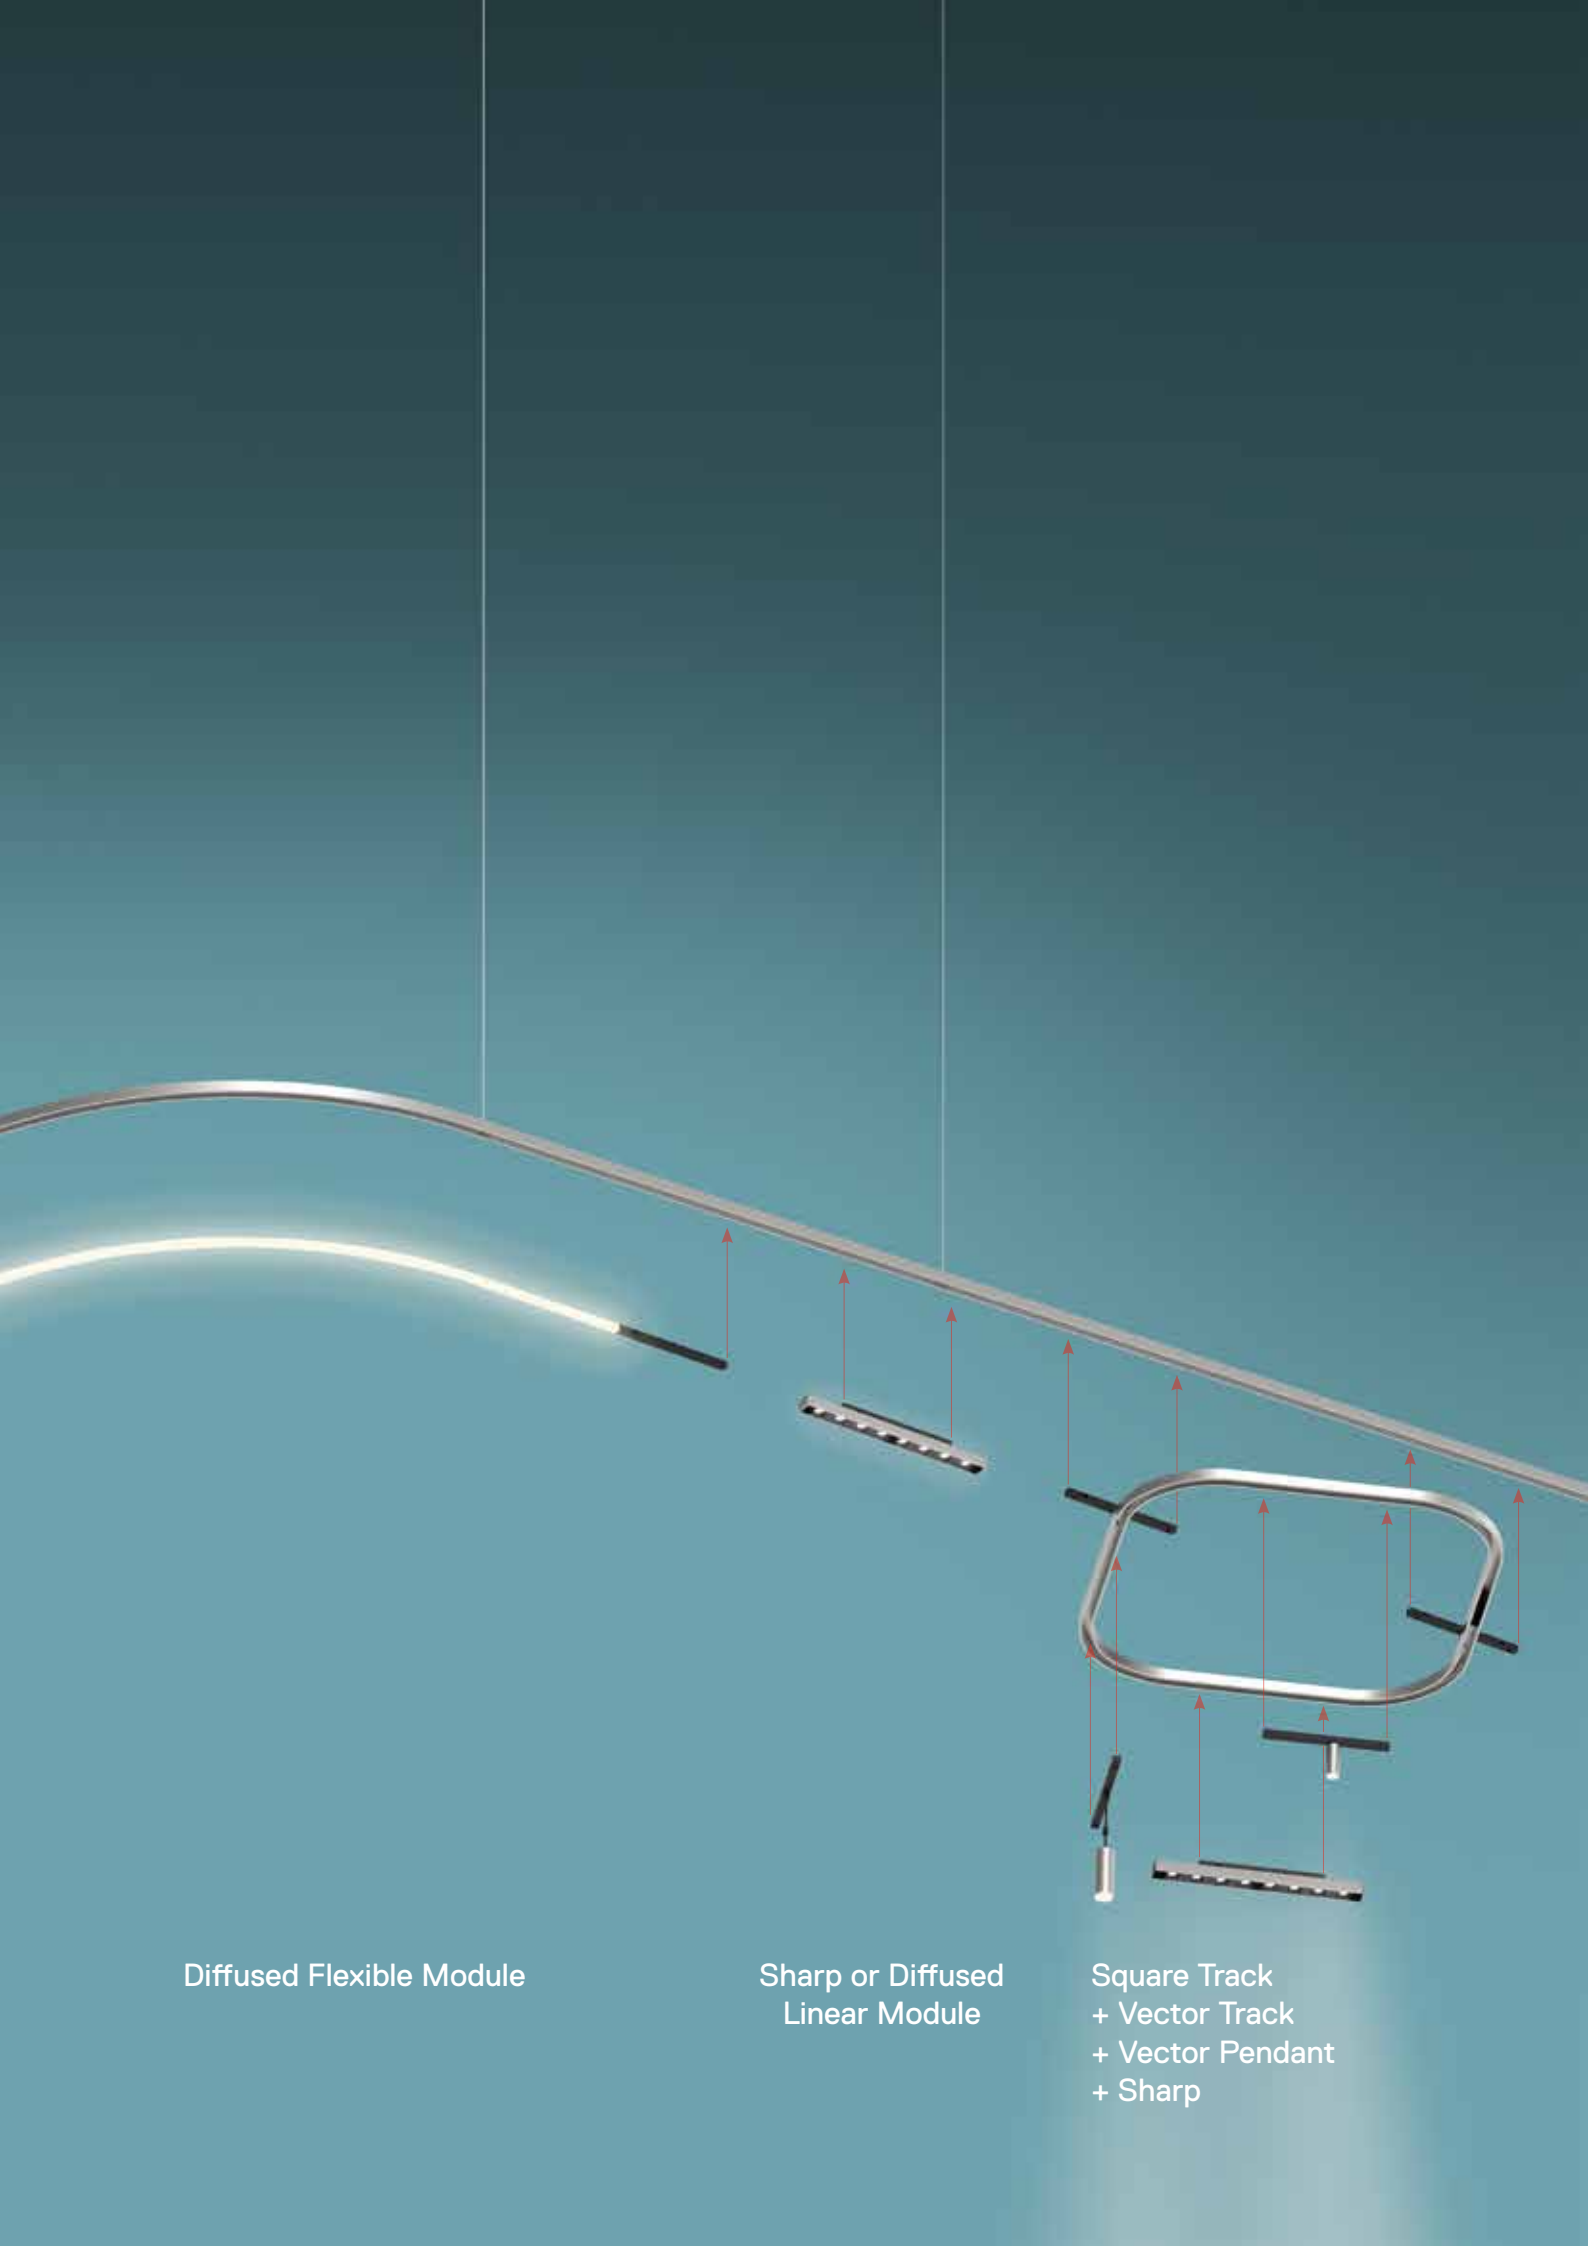

Diffused Flexible Module

Sharp or Diffused
Linear Module


Square Track
+ Vector Track
+ Vector Pendant
+ Sharp

Turn Around light appliances

Integrating different performances

Diffused flexible module

15 x h 10 mm
542 lm/m installed
8,5 W/m
3000 K
Max length 4,5 m

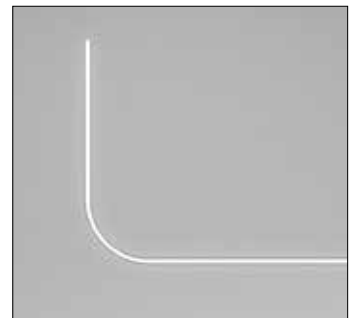


Vector 30 Pendant

Ø 30 x h 77 mm
335 lm* - 7 W

Vector 40 Pendant

Ø 40 x h 103 mm
584 lm* - 10 W

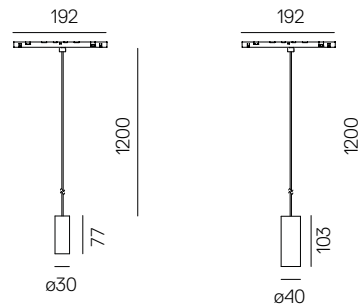

Vector 20


Ø 20 x h 50 mm
180 lm* - 3,5 W

Vector 30

Ø 30 x h 77 mm
335 lm* - 7 W


Vector 40

Ø 40 x h 103 mm
584 lm* - 10 W




Sharp 8

315 x 27 x h 20 mm
1071 lm* - 14 W



Sharp 12

464 x 27 x h 20 mm
1607 lm* - 19 W



* 3000 K values.

Diffused Linear Module 600



599 x 27 x h 20 mm

1313 lm* - 15 W

Diffused Linear Module 1200



1187 x 27 x h 20 mm

2626 lm* - 30 W

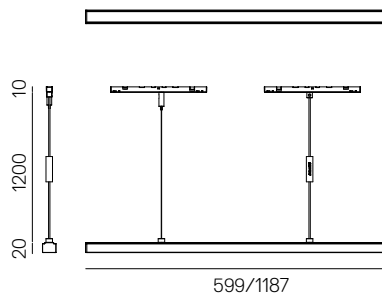

Horizontal Square - Track

590 x 590 x h 18 mm


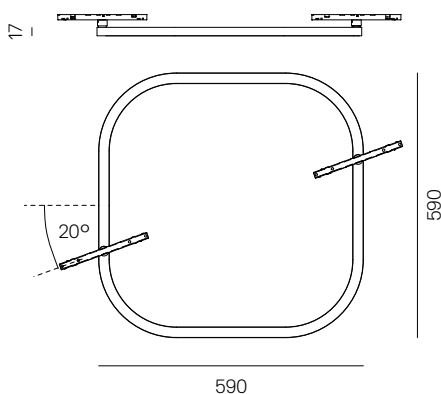


Horizontal Square - Diffused Strip LED

Diffused emission

590 x 590 x h 18 mm

976 lm* - 18 W


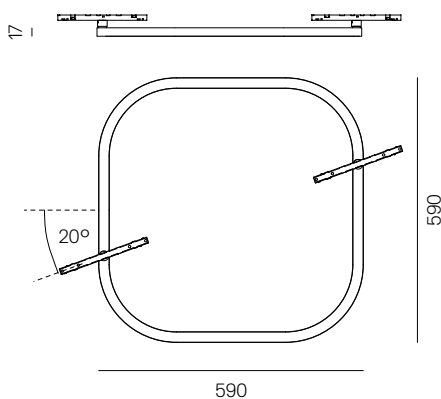


Vertical Square - Diffused Strip LED

Diffused emission

590 x 590 x h 18 mm


976 lm* - 18 W

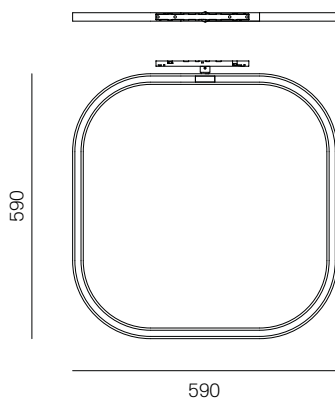

* 3000 K values.

Turn Around is powered at 48 Vdc

ELEVATION

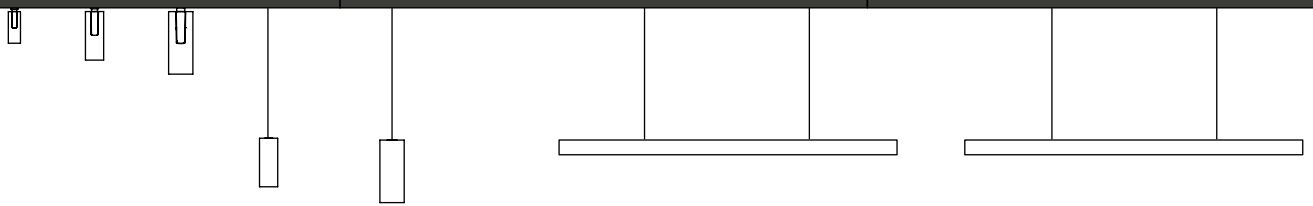

VECTOR 20

max 35 with 1 Power Supply 150W
max 60 with 1 Power Supply 240W
max 77 with 1 Power Supply 320W

VECTOR 30/VECTOR 30 PENDANT

max 17 with 1 Power Supply 150W
max 30 with 1 Power Supply 240W
max 38 with 1 Power Supply 320W

VECTOR 40/VECTOR 40 PENDANT

max 12 with 1 Power Supply 150W
max 21 with 1 Power Supply 240W
max 27 with 1 Power Supply 320W

DIFFUSED LINEAR MODULE 600

max 8 with 1 Power Supply 150W
max 14 with 1 Power Supply 240W
max 18 with 1 Power Supply 320W

DIFFUSED LINEAR MODULE 1200

max 4 with 1 Power Supply 150W
max 7 with 1 Power Supply 240W
max 9 with 1 Power Supply 320W

SHARP 8

max 8 with 1 Power Supply 150W
max 15 with 1 Power Supply 240W
max 19 with 1 Power Supply 320W

SHARP 12

max 6 with 1 Power Supply 150W
max 11 with 1 Power Supply 240W
max 14 with 1 Power Supply 320W

DIFFUSED


FLEXIBLE MODULE 2m

max 7 with 1 Power Supply 150W
max 12 with 1 Power Supply 240W
max 15 with 1 Power Supply 320W

FLEXIBLE MODULE 4,5m

max 3 with 1 Power Supply 150W
max 5 with 1 Power Supply 240W
max 7 with 1 Power Supply 320W


PLAN

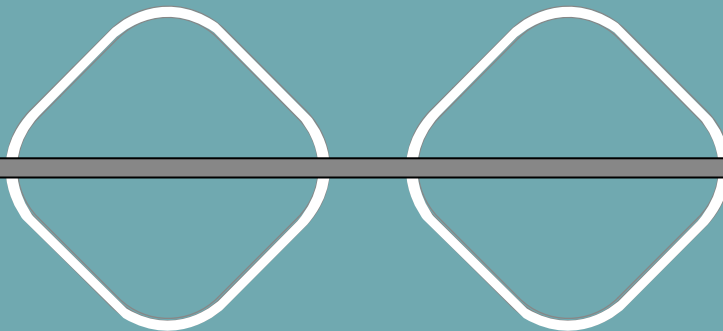

SQUARE INSETS

VECTOR 20, 30, 40
max 3

SHARP 8
max 3







Turn Around is safe

a unique feature developed for a real safe DALI interface.



D.Art is a technology designed by Artemide that overcomes the safety limits of the DALI signal in devices where the same signal is accessible to the touch.

The DALI signal is transformed to a “SELV” safety extra low voltage ensuring the total safety of the appliance.

Turn Around has been designed in compliance with international certifications.



Asserting electronic intelligence

Reduce to innovate


Artemide APP

Real time freedom not only during installation but also in the interaction through Artemide App that manages the Dali addresses present in the system.



**Artemide
App**



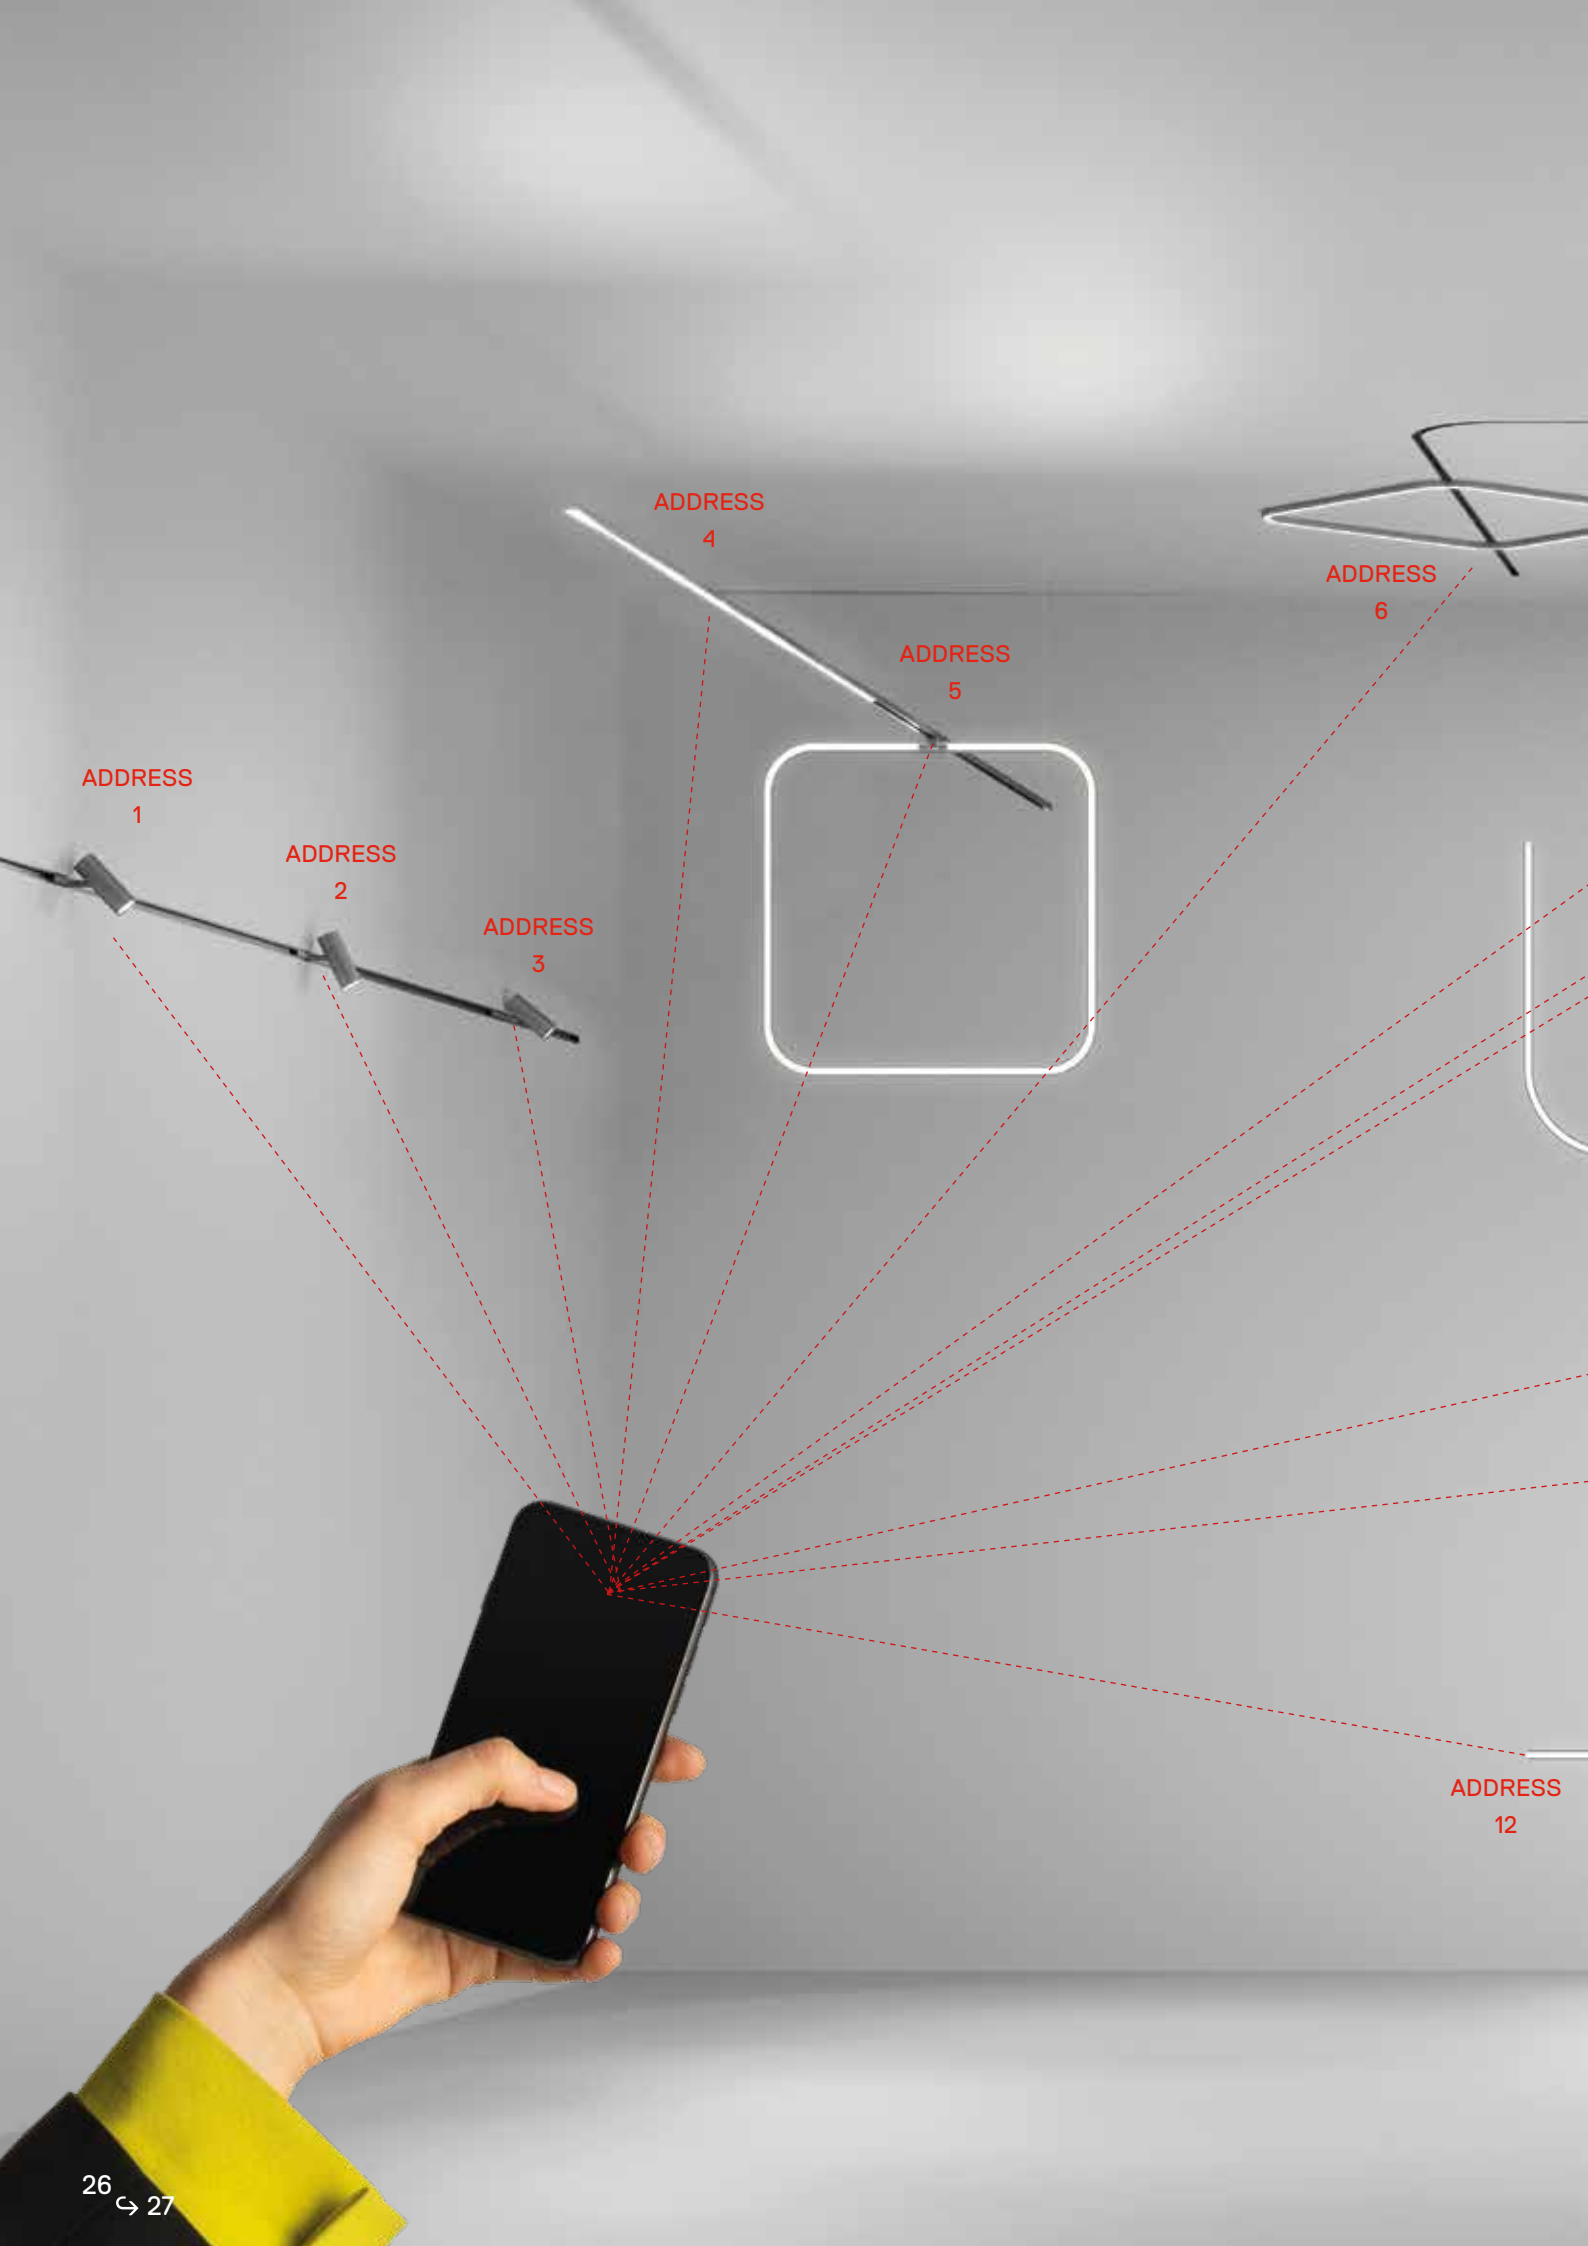

ADDRESS
4

ADDRESS
6


ADDRESS
5

ADDRESS
1

ADDRESS
2

ADDRESS
3

ADDRESS
12

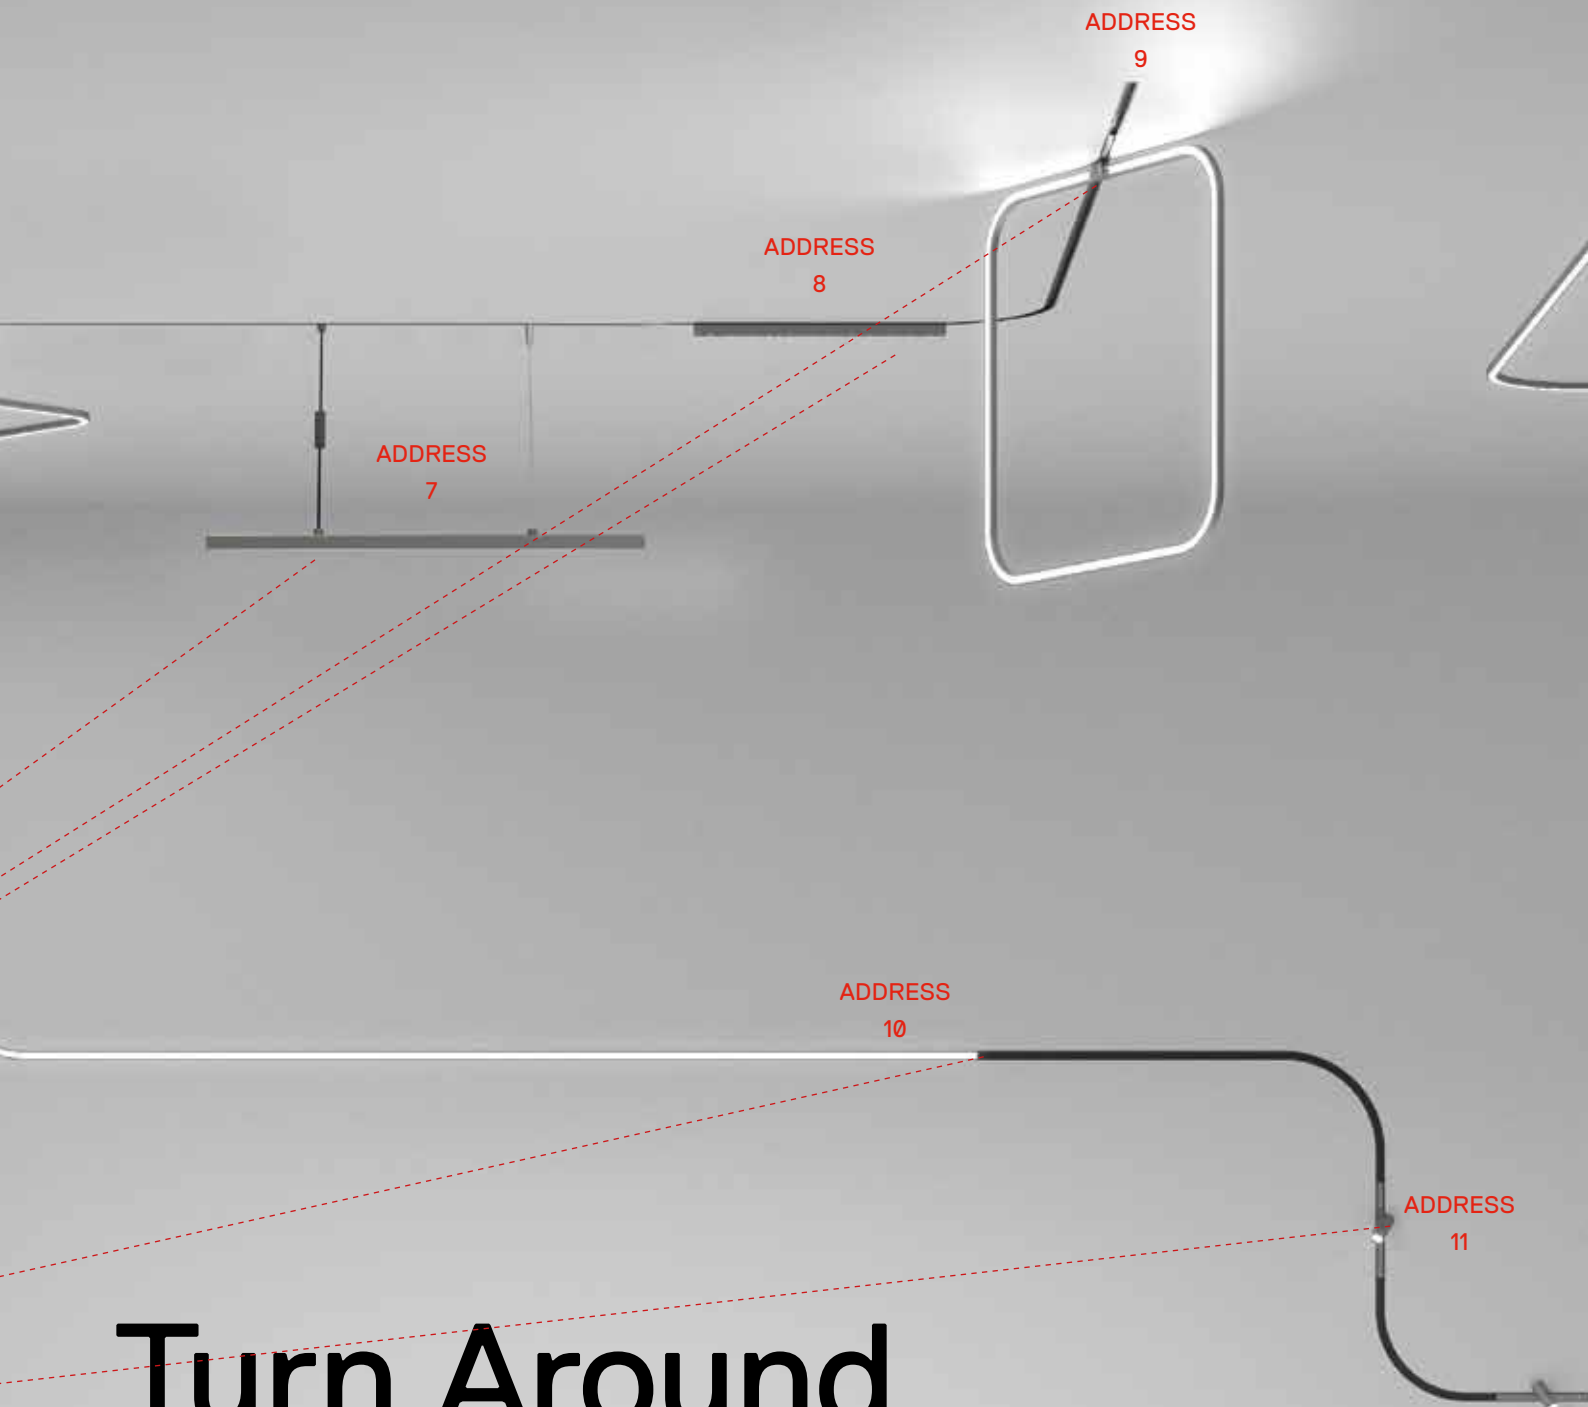

Turn Around is fully addressable

Each lighting appliance can be managed separately by Artemide App or by DALI control.

Turn Around power supply

CEILING
POWER SUPPLY
240W - 150W

RECESSED
POWER SUPPLY
320W - 240W - 150W

REMOTE BARE
POWER SUPPLY
240W - 150W


REMOTE BOX
POWER SUPPLY
320W - 240W

A


B

C


D

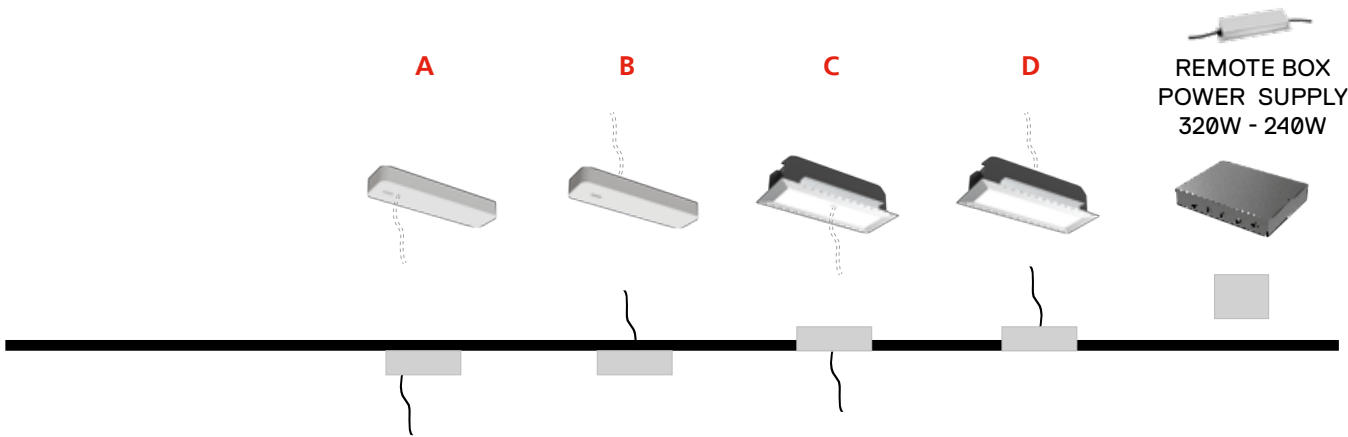


SUSPENSION









SMD




RECESSED



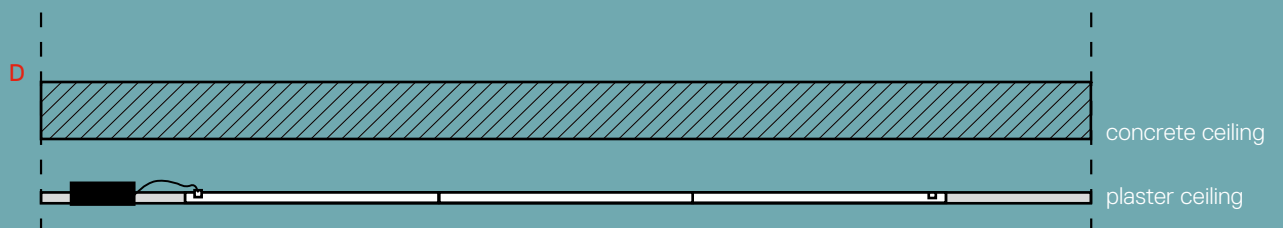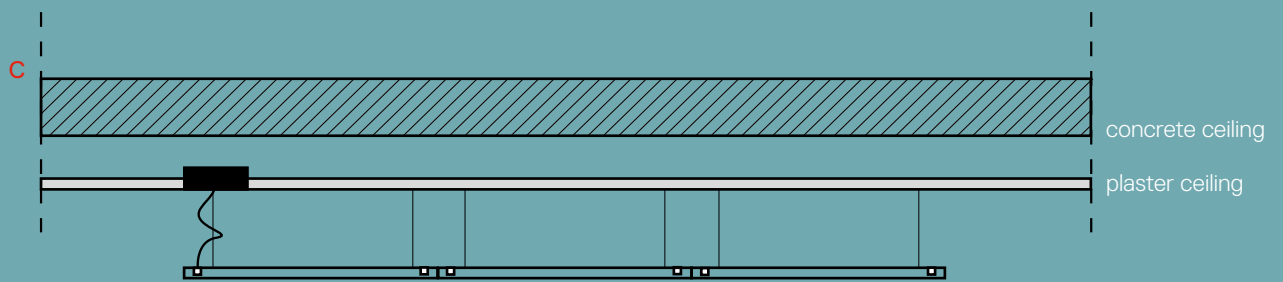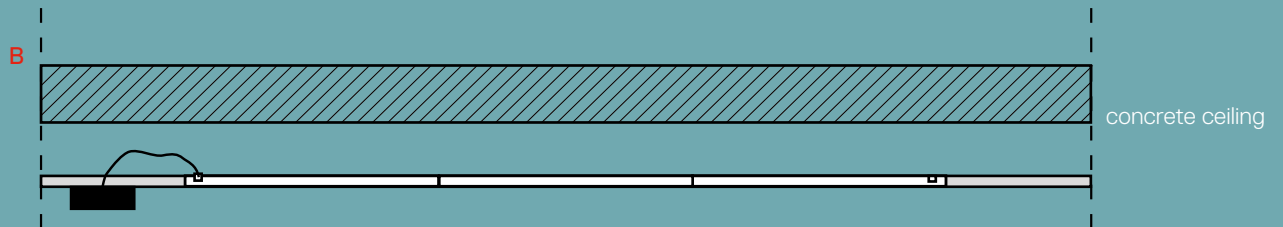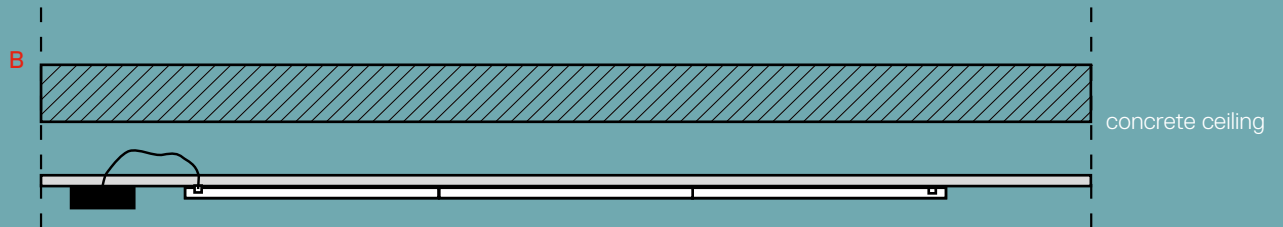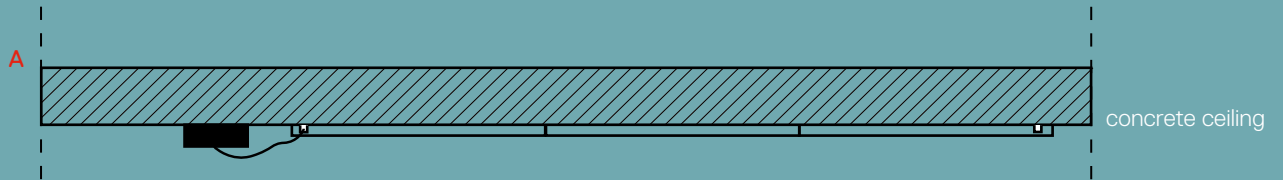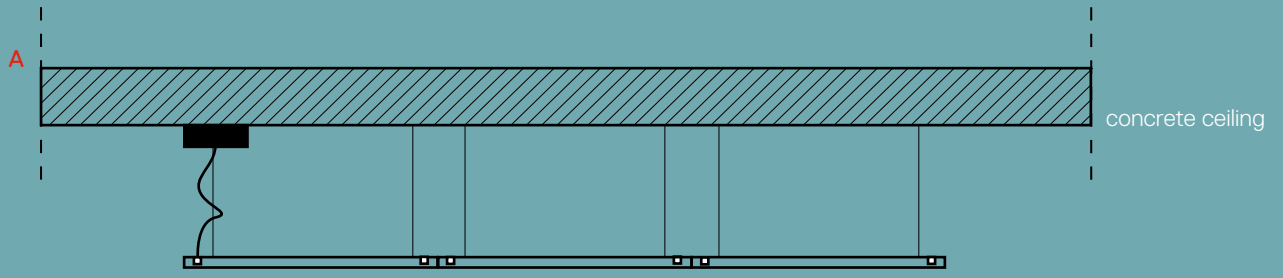

Turn Around structural track

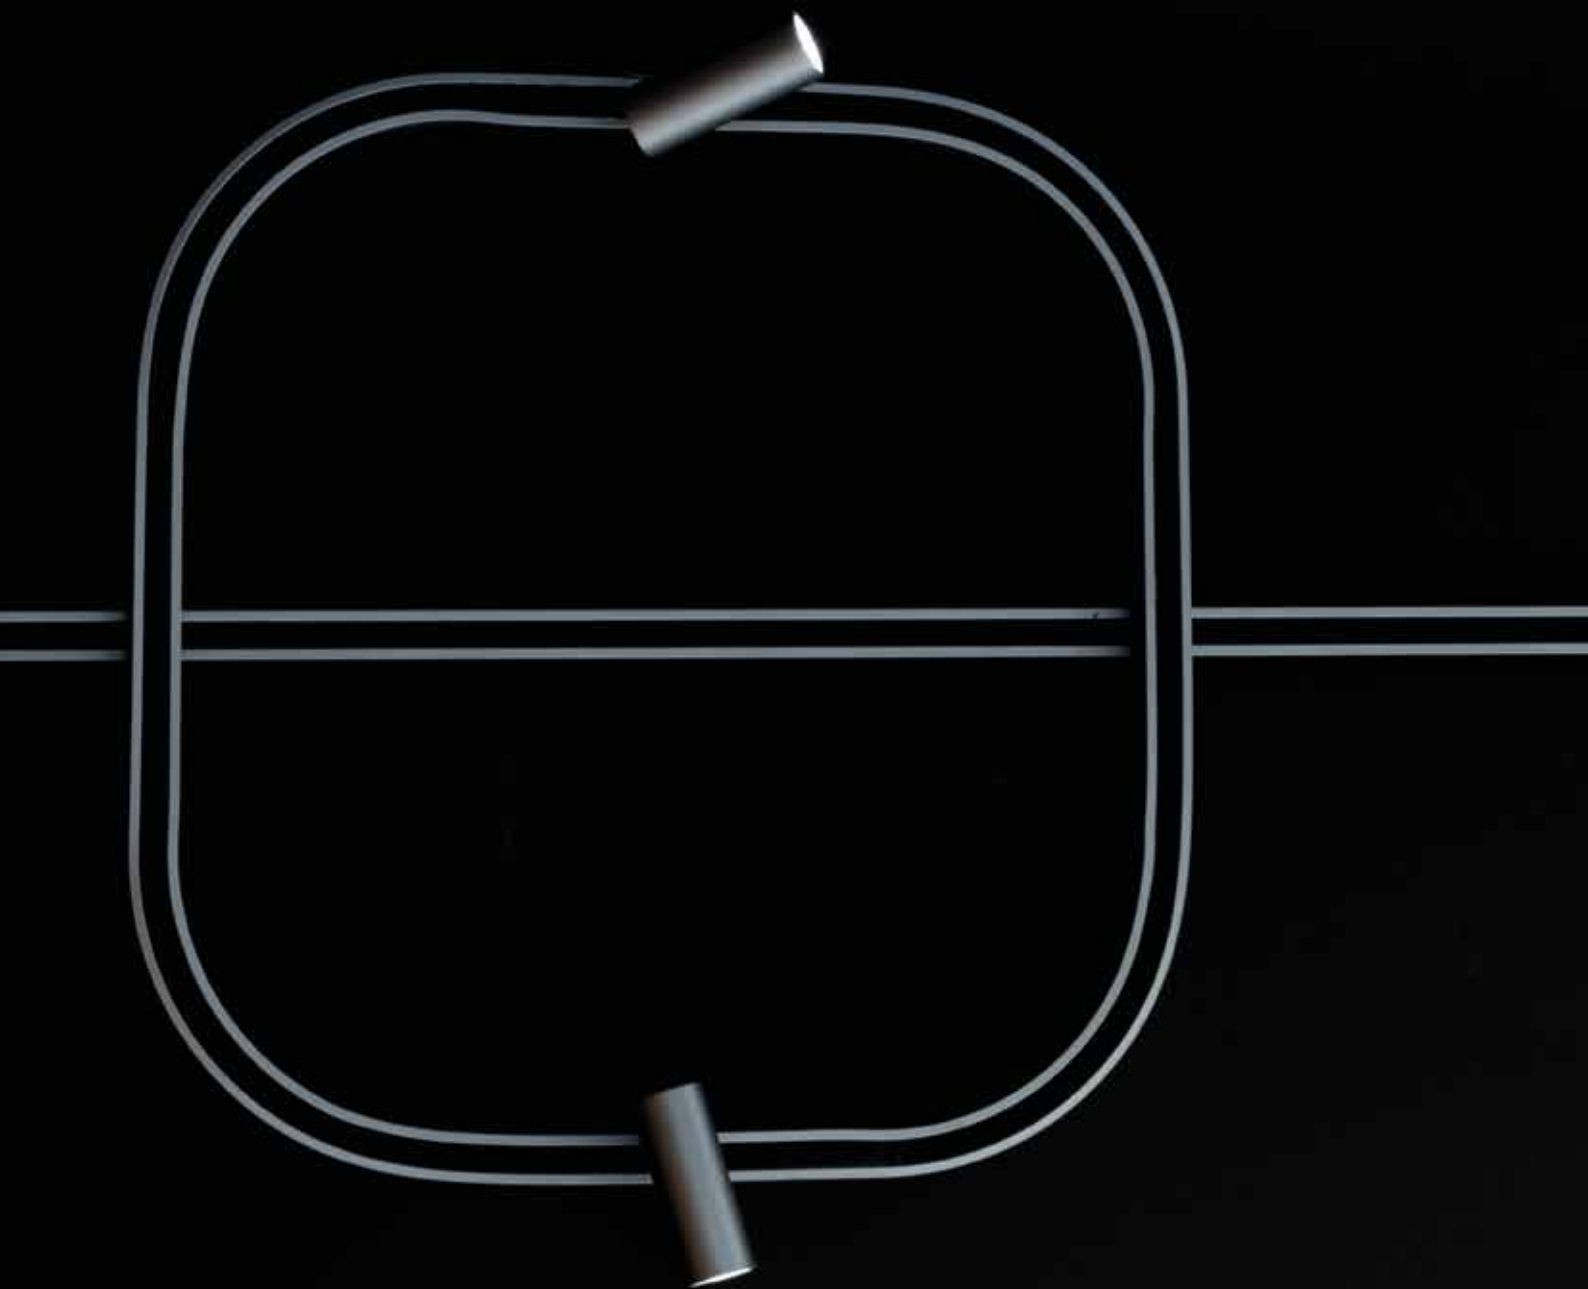

TURN AROUND RECESSED TRACK

Black



IP20



Linear elements

Length

1000 mm
2000 mm
3000 mm

Code

TA00104
TA00204
TA00304





12,5
23

Angle elements

90° on same plane track angle elements
50 x 50 mm

Code

TA80004



Curved joining elements

Radius Angle

300 mm

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Code

TA30004

TA30304

TA30604

TA30104





TA30404

TA30704

TA30204

TA30504

TA30804



Accessories



Fed end cap
Cable L= 2500mm


Code

TA90700



Recessed Fixing Kit (7pcs)
Linear element L= 3000mm uses 7pcs
Linear element L= 2000mm uses 5pcs
Linear element L= 1000mm uses 3pcs

TA90100



Electro-Mechanical Joint Kit

TA90000

Accessories for cutting components of linear elements

Shaping tool: to shape insulating conductor support

Code

TA00000




















Locking tool: to lock insulating conductor spacer into aluminum profile

TA00100

Note: no tools provided to cut aluminum profile.

White Titanium



Power supply	Undimmable	DALI/0-10/1-10/PUSH	Dimmable APP
	Code	Code	Code
 <p>320W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  395x165x107H</p>	TA66001	TA66101	TA66101APP
 <p>240W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  395x165x107H</p>	TA61901	TA62001	TA62001APP
 <p>150W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  395x165x107H</p>	TA61701	TA61801	TA61801APP
 <p>240W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA60501 <input checked="" type="radio"/> TA60722	<input type="radio"/> TA60601 <input checked="" type="radio"/> TA60822	<input type="radio"/> TA60601APP <input checked="" type="radio"/> TA60822APP
 <p>150W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA60101 <input checked="" type="radio"/> TA60322	<input type="radio"/> TA60201 <input checked="" type="radio"/> TA60422	<input type="radio"/> TA60201APP <input checked="" type="radio"/> TA60422APP
 <p>320W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA68000	TA68000APP
 <p>240W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA62500	TA62500APP
 <p>240W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98000		
 <p>150W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98100		
 <p>DALI/0-10/1-10/PUSH SELV Interface 103x67x21H</p>		DV1061	

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

DV1080APP

TURN AROUND SMD TRACK

Titanium



IP20




Linear elements

Length

1000 mm
2000 mm
3000 mm

Code

TA10122
TA10222
TA10322




Angle elements

90° on same plane track angle elements
75 x 75 mm

Code

TA80122



Curved joining elements

Radius Alpha

300 mm

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Code

TA40022

TA40322

TA40622

TA40122




TA40422

TA40722

TA40222

TA40522

TA40822




Accessories



Fed end cap
Cable L= 2500mm

Code

TA90700



Ceiling bracket Kit (4pcs)
Linear element L= 3000mm uses 4pcs
Linear element L= 2000mm uses 3pcs
Linear element L= 1000mm uses 1pcs

TA90400




















Electro-Mechanical Joint Kit

TA90200

White Titanium



Power supply	Undimmable Code	DALI/0-10/1-10/PUSH Code	Dimmable APP Code
 <p>240W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA61301 <input checked="" type="radio"/> TA61522	<input type="radio"/> TA61401 <input checked="" type="radio"/> TA61622	<input type="radio"/> TA61401APP <input checked="" type="radio"/> TA61622APP
 <p>150W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA60901 <input checked="" type="radio"/> TA61122	<input type="radio"/> TA61001 <input checked="" type="radio"/> TA61222	<input type="radio"/> TA61001APP <input checked="" type="radio"/> TA61222APP
 <p>240W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA60501 <input checked="" type="radio"/> TA60722	<input type="radio"/> TA60601 <input checked="" type="radio"/> TA60822	<input type="radio"/> TA60601APP <input checked="" type="radio"/> TA60822APP
 <p>150W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA60101 <input checked="" type="radio"/> TA60322	<input type="radio"/> TA60201 <input checked="" type="radio"/> TA60422	<input type="radio"/> TA60201APP <input checked="" type="radio"/> TA60422APP
 <p>320W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA68000	TA68000APP
 <p>240W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA62500	TA62500APP
 <p>240W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98000		
 <p>150W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98100		
 <p>DALI/0-10/1-10/PUSH SELV Interface 103x67x21H</p>		DV1061	

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

DV1080APP

TURN AROUND SUSPENSION DIRECT TRACK

Titanium



IP20



Linear elements

Length

1000 mm
2000 mm
3000 mm

Code

TA10122
TA10222
TA10322




Angle elements

90° on same plane track angle elements
75 x 75 mm

Code

TA80122



Curved joining elements

Radius Alpha

300 mm

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Code

TA40022

TA40322

TA40622

TA40122




TA40422

TA40722

TA40222

TA40522

TA40822



Accessories



Fed end cap
Cable L= 2500mm

Code

TA90600



Suspension Kit (3pcs)
Linear element L= 3000mm uses 3pcs
Linear element L= 2000mm uses 2pcs
Linear element L= 1000mm uses 2pcs

TA90500






















Electro-Mechanical Joint Kit

TA90300

White Titanium



Power supply	Undimmable	DALI/0-10/1-10/PUSH	Dimmable APP
	Code	Code	Code
 <p>320W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107H</p>	TA67001	TA67101	TA67101APP
 <p>240W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107H</p>	TA62301	TA62401	TA62401APP
 <p>150W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107H</p>	TA62101	TA62201	TA62201APP
 <p>240W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA61301 <input checked="" type="radio"/> TA61522	<input type="radio"/> TA61401 <input checked="" type="radio"/> TA61622	<input type="radio"/> TA61401APP <input checked="" type="radio"/> TA61622APP
 <p>150W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA60901 <input checked="" type="radio"/> TA61122	<input type="radio"/> TA61001 <input checked="" type="radio"/> TA61222	<input type="radio"/> TA61001APP <input checked="" type="radio"/> TA61222APP
 <p>320W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA68000	TA68000APP
 <p>240W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA62500	TA62500APP
 <p>240W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98000		
 <p>150W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98100		
 <p>DALI/0-10/1-10/PUSH SELV Interface 103x67x21H</p>		DV1061	

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

DV1080APP

TURN AROUND SUSPENSION DIRECT+INDIRECT TRACK

Titanium



*Delivery time on demand

IP20



Linear elements


Length

1000 mm
2000 mm
3000 mm

Direct + Indirect

Code

TA20122
TA20222
TA20322




Angle elements

90° on same plane track angle elements
75 x 75 mm

Direct + Indirect

Code

TA80222



Curved joining elements*

Radius Alpha

300 mm

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Direct + Indirect

Code

TA50022

TA50322

TA50622

TA50122




TA50422

TA50722

TA50222

TA50522

TA50822



Accessories



Fed end cap
Cable L= 2500mm

Code

TA90800



Suspension Kit (3pcs)

Linear element L= 3000mm uses 3pcs
Linear element L= 2000mm uses 2pcs
Linear element L= 1000mm uses 2pcs

TA90500






















Electro-Mechanical Joint Kit

TA90300

White Titanium



Power supply	Undimmable	DALI/0-10/1-10/PUSH	Dimmable APP
	Code	Code	Code
 <p>320W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 </p> <p>395x165x107H</p>	TA67001	TA67101	TA67101APP
 <p>240W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 </p> <p>395x165x107H</p>	TA62301	TA62401	TA62401APP
 <p>150W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 </p> <p>395x165x107H</p>	TA62101	TA62201	TA62201APP
 <p>240W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20 </p> <p>400x110x50H</p>	<input type="radio"/> TA61301 <input checked="" type="radio"/> TA61522	<input type="radio"/> TA61401 <input checked="" type="radio"/> TA61622	<input type="radio"/> TA61401APP <input checked="" type="radio"/> TA61622APP
 <p>150W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20 </p> <p>400x110x50H</p>	<input type="radio"/> TA60901 <input checked="" type="radio"/> TA61122	<input type="radio"/> TA61001 <input checked="" type="radio"/> TA61222	<input type="radio"/> TA61001APP <input checked="" type="radio"/> TA61222APP
 <p>320W Remote box power supply kit 230VAC-48VDC IP20 </p> <p>313x243x57,5H</p>		TA68000	TA68000APP
 <p>240W Remote box power supply kit 230VAC-48VDC IP20 </p> <p>313x243x57,5H</p>		TA62500	TA62500APP
 <p>240W Bare power supply ON-OFF 230VAC-48VDC IP20 </p> <p>(for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98000		
 <p>150W Bare power supply ON-OFF 230VAC-48VDC IP20 </p> <p>(for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98100		
 <p>DALI/0-10/1-10/PUSH SELV Interface 103x67x21H</p>		DV1061	

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

DV1080APP



Turn Around lighting appliances



Vector Turn Around





VECTOR TURN AROUND

Titanium



S

F

WF



MacAdam 3SDCM
CRI = 90

IP20



Vector 20


W	Beam	Flux	CCT
3,5 W	S 16°	179 lm	2700K
		188 lm	3000K
3 W		184 lm	4000K
3,5 W	F 23°	171 lm	2700K
		180 lm	3000K
		189 lm	4000K
	WF 35°	168 lm	2700K
		177 lm	3000K
		186 lm	4000K

Dimmable¹

Code
TB00122
TB01122
TB03122
TB00222
TB01222
TB03222
TB00322
TB01322
TB03322



Life L90 (6K) >36300h



Vector 30


W	Beam	Flux	CCT
6,5 W	S 12°	329 lm	2700K
		329 lm	3000K
		329 lm	4000K
7 W	F 16°	335 lm	2700K
		335 lm	3000K
		335 lm	4000K
	WF 30°	292 lm	2700K
		292 lm	3000K
		292 lm	4000K

Dimmable¹

Code
TB10122
TB11122
TB13122
TB10222
TB11222
TB13222
TB10322
TB11322
TB13322



Life L90 (10K) >60500h



¹ Use of Artemide power units is mandatory.

VECTOR TURN AROUND

Titanium



S F WF



MacAdam 3SDCM
*MacAdam 2SDCM
CRI = 90

IP20



Vector 40


W	Beam	Flux	CCT	
10 W	S 14°	544 lm	2700K	
		541 lm	3000K	
		541 lm	4000K	
		*F 21°	543 lm	2700K
		584 lm	3000K	
		626 lm	4000K	
	*WF 28°	491 lm	2700K	
		529 lm	3000K	
		566 lm	4000K	





Dimmable¹

Code
TB20122
TB21122
TB23122
TB20222
TB21222
TB23222
TB20322
TB21322
TB23322



Life L90 (10K) 60500h



		Vector 40
		Code
	Accessories holder	AP90100
	Lens for elliptical emission	AP90200
	Soft filter	AP90300
	Anti-dazzle louvre	AP90400
		Code

¹ Use of Artemide power units is mandatory.

VECTOR PENDANT TURN AROUND

Titanium



S F WF




MacAdam 3SDCM
* MacAdam 2SDCM
CRI = 90



Vector 30 Pendant


W	Beam	Flux	CCT	Dimmable ¹ Code
6,5 W	S 12°	329 lm	2700K	TB30122
		329 lm	3000K	TB31122
		329 lm	4000K	TB33122
7 W	F 16°	335 lm	2700K	TB30222
		335 lm	3000K	TB31222
		335 lm	4000K	TB33222
	WF 30°	292 lm	2700K	TB30322
		292 lm	3000K	TB31322
		292 lm	4000K	TB33322



Life L90 (10K) 60500h

Vector 40 Pendant

W	Beam	Flux	CCT	Dimmable ¹ Code
10 W	S 14°	544 lm	2700K	TB40122
		541 lm	3000K	TB41122
		541 lm	4000K	TB43122
	*F 21°	543 lm	2700K	TB40222
		584 lm	3000K	TB41222
		626 lm	4000K	TB43222
*WF 28°	491 lm	2700K	TB40322	
	529 lm	3000K	TB41322	
	566 lm	4000K	TB43322	



Life L90 (10K) 60500h



** No cuttable wire.
Clips included to adjust the length.

¹ Use of Artemide power units is mandatory.



SHARP TURN AROUND

Titanium



F WF



MacAdam 2SDCM
CRI = 90

IP20

Sharp 8x

	W	Beam	Flux	CCT
8 LED	14 W	F 26°	1071 lm	2700K
			1071 lm	3000K
			1147 lm	4000K
		XF 62°	1139 lm	2700K
			1139 lm	3000K
			1219 lm	4000K

Dimmable

Code

TB50222



TB51222

TB53222

TB50422

TB51422

TB53422



Sharp 12x

	W	Beam	Flux	CCT
12 LED	19 W	F 26°	1607 lm	2700K
			1607 lm	3000K
			1720 lm	4000K
		XF 62°	1708 lm	2700K
			1708 lm	3000K
			1829 lm	4000K

Dimmable

Code

TB60222


TB61222

TB63222

TB60422

TB61422

TB63422



Sharp Turn Around



DIFFUSED LINEAR MODULES TURN AROUND

Titanium



MacAdam 2SDCM
CRI = 90



IP20

Diffused linear module

	W	Flux	CCT
600 mm	15 W	1255 lm	2700K
		1421 lm	3000K
		1374 lm	4000K
1200 mm	30 W	2510 lm	2700K
		2843 lm	3000K
		2748 lm	4000K

Dimmable

Code
TD21022
TD22022
TD24022
TD31022
TD32022
TD34022



** No cuttable wire.
Clips included to adjust the length.

A modern lighting fixture is shown against a plain white background. The fixture consists of a dark, curved track that runs across the top of the frame. A thin, vertical wire is suspended from the track, leading down to a long, thin, rectangular linear light module. The module is positioned horizontally and appears to be part of the track system. The overall aesthetic is clean and minimalist.

**Diffused linear
modules
Turn Around**

Diffused flexible modules Turn Around

Diffused flexible modules*				Dimmable
	W	Flux	CCT	Code
2000mm	18 W	1000 lm	3000K	TB91922
4500 mm	39 W	2252 lm	3000K	TB90922



* The adapter of the diffused flexible module can be fixed only in linear module.



Square modules


Turn Around

Horizontal square diffused

W	Flux	CCT
18 W	1000 lm	3000K

Dimmable

Code
TB81922

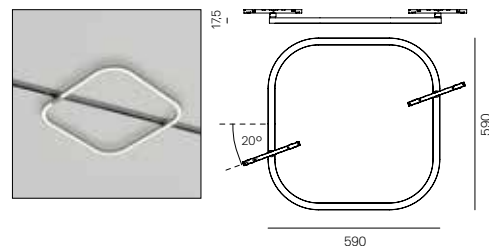


Vertical square diffused

W	Flux	CCT
18 W	1000 lm	3000K


Dimmable

Code
TB71922

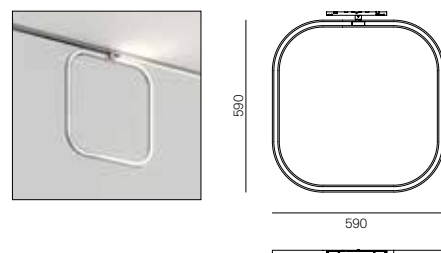


Horizontal square track*

Code
TB99922

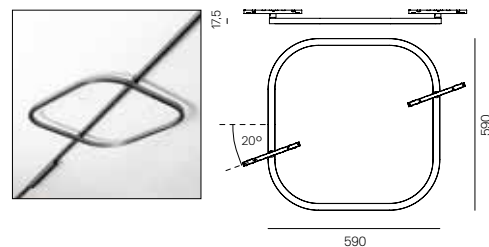

*Insets horizontal square track



Insets


Vector 20 Track
Vector 30 Track
Vector 40 Track
Vector 30 Pendant Track
Vector 40 Pendant Track
Sharping 8x
Sharping 12x
Strip LED

N° Max

3
3
3
3
3
3
X
X
X





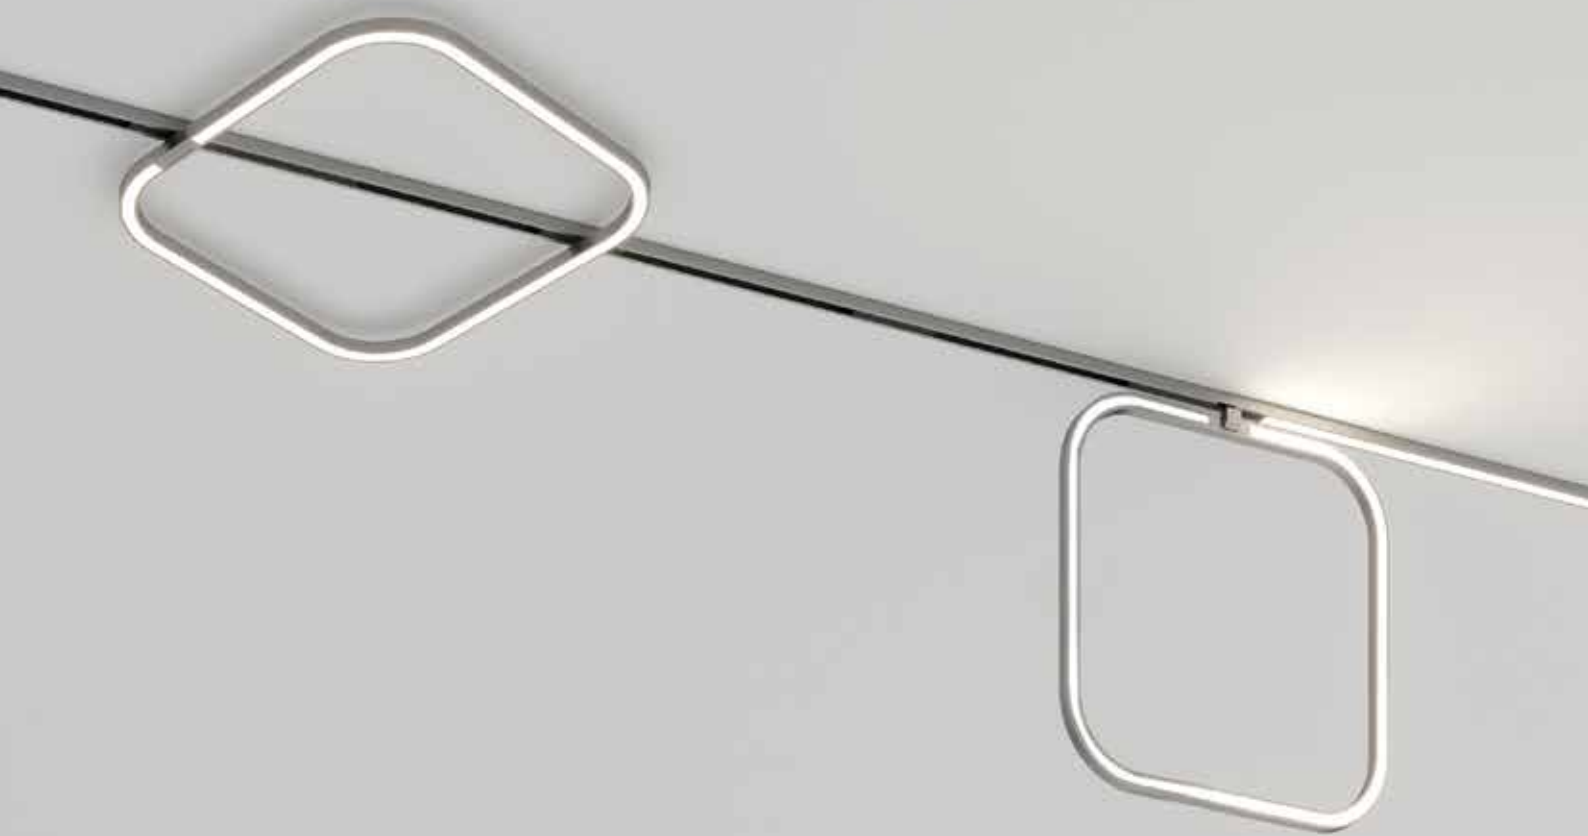



Turn Around is inclusive




LIGHTING APPLIANCES TURN AROUND

Black White
S F WF
IP20


GOPLE MINI PENDANT TURN AROUND, BIG - BJARKE INGELS GROUP

W	Flux	CCT	Dimmable Code
9 W	836 lm	2700K	TC10401
	850 lm	3000K	TC11401

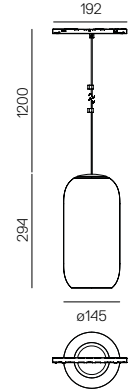


GOPLE 60 PENDANT TURN AROUND, BIG - BJARKE INGELS GROUP

W	Colour	Beam	Flux	CCT	Dimmable Code
10 W	Black	S 13°	557 lm	2700K	TC50104
			557 lm	3000K	TC51104
			557 lm	4000K	TC53104
		F 20°	556 lm	2700K	TC50204
			598 lm	3000K	TC51204
			641 lm	4000K	TC53204
		WF 28°	503 lm	2700K	TC50304
			542 lm	3000K	TC51304
			580 lm	4000K	TC53304



GOPLE 80 PENDANT TURN AROUND, BIG - BJARKE INGELS GROUP

W	Colour	Beam	Flux	CCT	Dimmable Code
19 W	Black	S 16°	1698 lm	2700K	TC40104
			1771 lm	3000K	TC41104
			1795 lm	4000K	TC43104
		F 22°	1716 lm	2700K	TC40204
			1811 lm	3000K	TC41204
			1488 lm	4000K	TC43204
		WF 32°	1782 lm	2700K	TC40304
			1878 lm	3000K	TC41304
			1883 lm	4000K	TC43304



** No cuttable wire.
Clips included to adjust the length.



LIGHTING APPLIANCES TURN AROUND

White




IP20




SPHERE 9 PENDANT TURN AROUND

W	Flux	CCT	Dimmable Code
4 W	346 lm	2700K	TC30406
	373 lm	3000K	TC31406

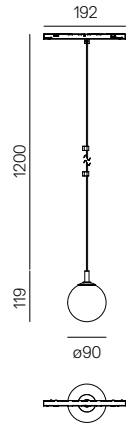

SPHERE 14 PENDANT TURN AROUND

W	Flux	CCT	Dimmable Code
8,5 W	628 lm	2700K	TC20406
	677 lm	3000K	TC21406

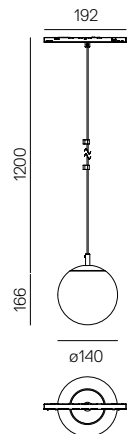

** No cuttable wire.
Clips included to adjust the length.



LIGHTING APPLIANCES TURN AROUND

Aluminium

Brass




IP20




ORSA 21 PENDANT TURN AROUND, FOSTER + PARTNERS

W	Flux	CCT	Dimmable Code
8 W	525 lm	2700K	TC60404
	562 lm	3000K	TC61404

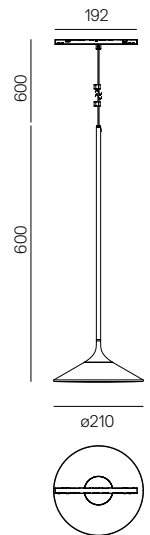

UNTERLINDEN PENDANT TURN AROUND, HERZOG & DE MEURON

W	Colour	Flux	CCT	Dimmable Code
7 W	Brass	339 lm	2700K	TC70406
	Aluminum			TC70407
	Brass	349 lm	3000K	TC71406
	Aluminum			TC71407

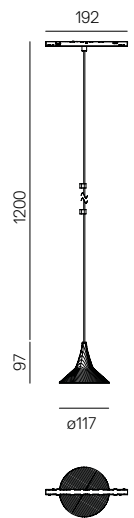

** No cuttable wire.
Clips included to adjust the length.



LIGHTING APPLIANCES TURN AROUND

Black




IP20



DISCOVERY 70 VERTICAL PENDANT TURN AROUND, ERNESTO GISMONDI

W	Colour	Flux	CCT	Dimmable Code
29 W	Black	2317 lm	3000K	TC01404

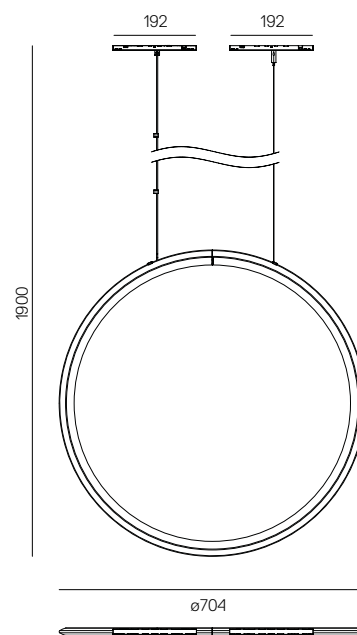



** No cuttable wire.
Clips included to adjust the length.



LIGHTING APPLIANCES TURN AROUND


Anthracite Blue Red White/Grey Yellow



IP20 


IXA 132 TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN

W	Flux	CCT	Colour	Dimmable Code
14 W	465 lm	3000K	Anthracite	TC81004
			Blue	TC81007
			Red	TC81008
			White/Grey	TC81001
			Yellow	TC81006

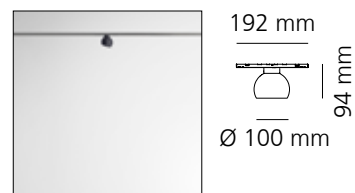


IXA 663 TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN

W	Flux	CCT	Colour	Dimmable Code
14 W	465 lm	3000K	Anthracite	TC81104
			Blue	TC81107
			Red	TC81108
			White/Grey	TC81101
			Yellow	TC81106

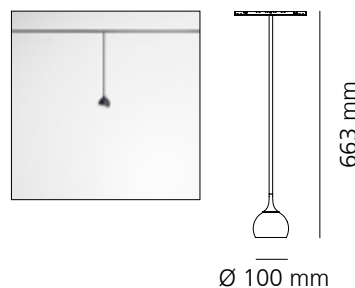

IXA 1140 TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN

W	Flux	CCT	Colour	Dimmable Code
14 W	465 lm	3000K	Anthracite	TC81204
			Blue	TC81207
			Red	TC81208
			White/Grey	TC81201
			Yellow	TC81206

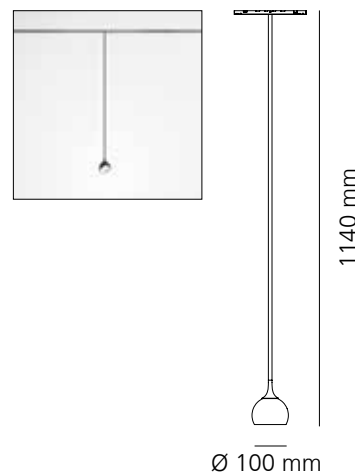



Turn Around Floor

Carlotta de Bevilacqua
2023

Turn Around Floor shares the same design principles of Turn Around system starting from parameters of sustainability, reduction, lightness, optoelectronic intelligence and interaction. Like the system it is perfect for a last-minute choice able to add dynamic light quality to the space. The slender and minimal structure integrates two different lighting performances to meet the needs of any space, from office workstations to meeting rooms, hospitality or residential spaces.

Turn Around Floor combines to the direct controlled emission also an indirect diffuse emission which can be managed separately both from the luminaire body.


The high efficiency and the flexibility of emissions management make Turn Around Floor an optimal solution for intelligent energy saving that enhances the experience and the awareness of the user.




For further information on Turn Around Floor
↳ visit [artemide.com](https://www.artemide.com)




Refractive emission

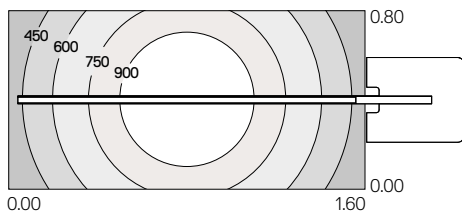

Refractive Direct
Head h 2015 mm - Desk h 750 mm
 $E_{av} = 708 \text{ lx}$ $u_0 = 0,444$

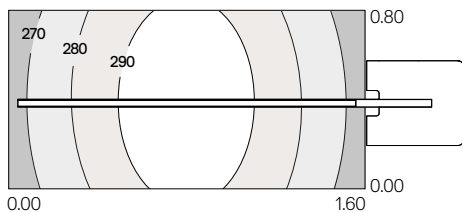

Refractive Indirect
Head h 2015 mm - Desk h 750 mm
 $E_{av} = 281 \text{ lx}$ $u_0 = 0,942$

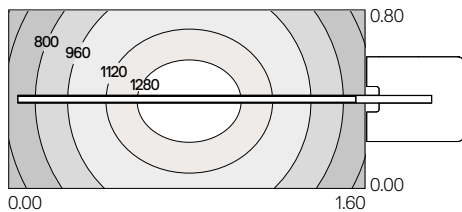

Refractive Direct + Indirect
Head h 2015 mm - Desk h 750 mm
 $E_{av} = 989 \text{ lx}$ $u_0 = 0,584$

Refractive lens

Collects 100% of the luminous flux

High Efficiency

more than 90%

High Efficacy

up to 130 lm/W

High Glare Control

UGR < 16

CRI 90

Lighting calculation parameters used for Isolux diagrams: office with a single workstation.

Length x width x height: 5.00 x 5.00 x 2.70 m

Reflection factor ceiling/wall/floor: 70/50/20%

Desk: 1.60 x 0.80 x 0.75 m

Maintenance factor: 0.90 WF



Capacitive board for light management



Indirect emission

On/Off

Dimming



Direct + Indirect emission

On/Off

Intensity setting



Direct emission

On/Off

Dimming

Sensor

Intensity setting and daylight

PIR (proximity)





Workplace

Direct and indirect emission
Direct emission
Indirect emission



TURN AROUND FLOOR

Titanium



MacAdam 3SDCM
CRI = 90

IP20

Turn Around Floor, direct + indirect emission


Weight	W	Flux	CCT
20 Kg	17W direct	1940 lm	3000K
	52W indirect	7500 lm	3000K
	17W direct	1940 lm	4000K
	52W indirect	7500 lm	4000K

Dimmable

Code
TE22022
TE23022


Dimmable + sensor*

Code
TE22122
TE23122

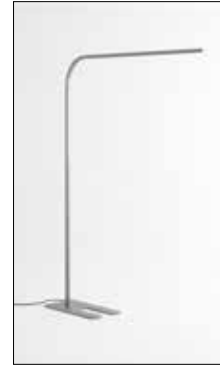

*Sensor functionalities:

- Intensity setting and daylight (touching for 3 seconds the central part of the controller)
- PIR (proximity)

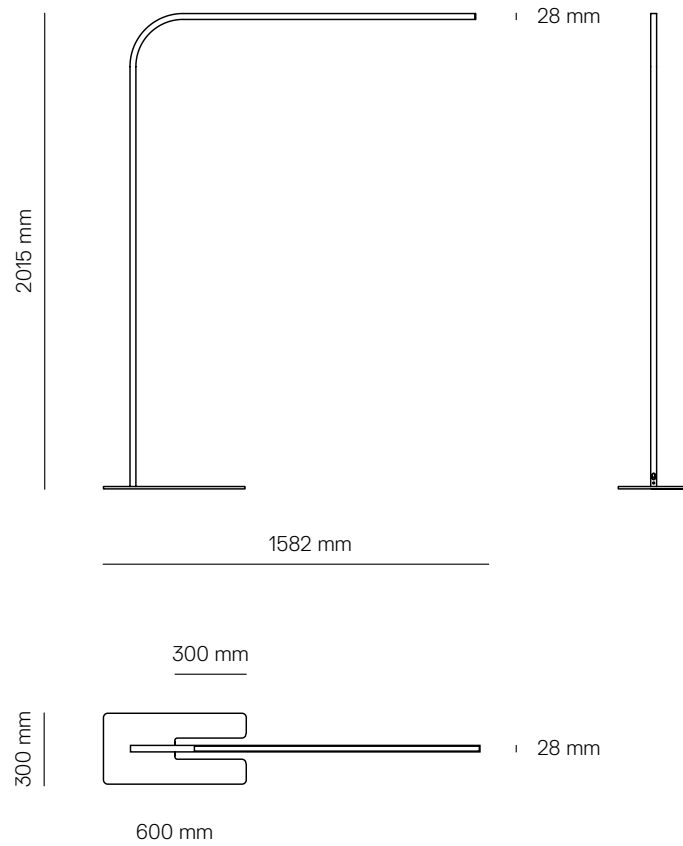










Turn Around Suspension

Carlotta de Bevilacqua
2024

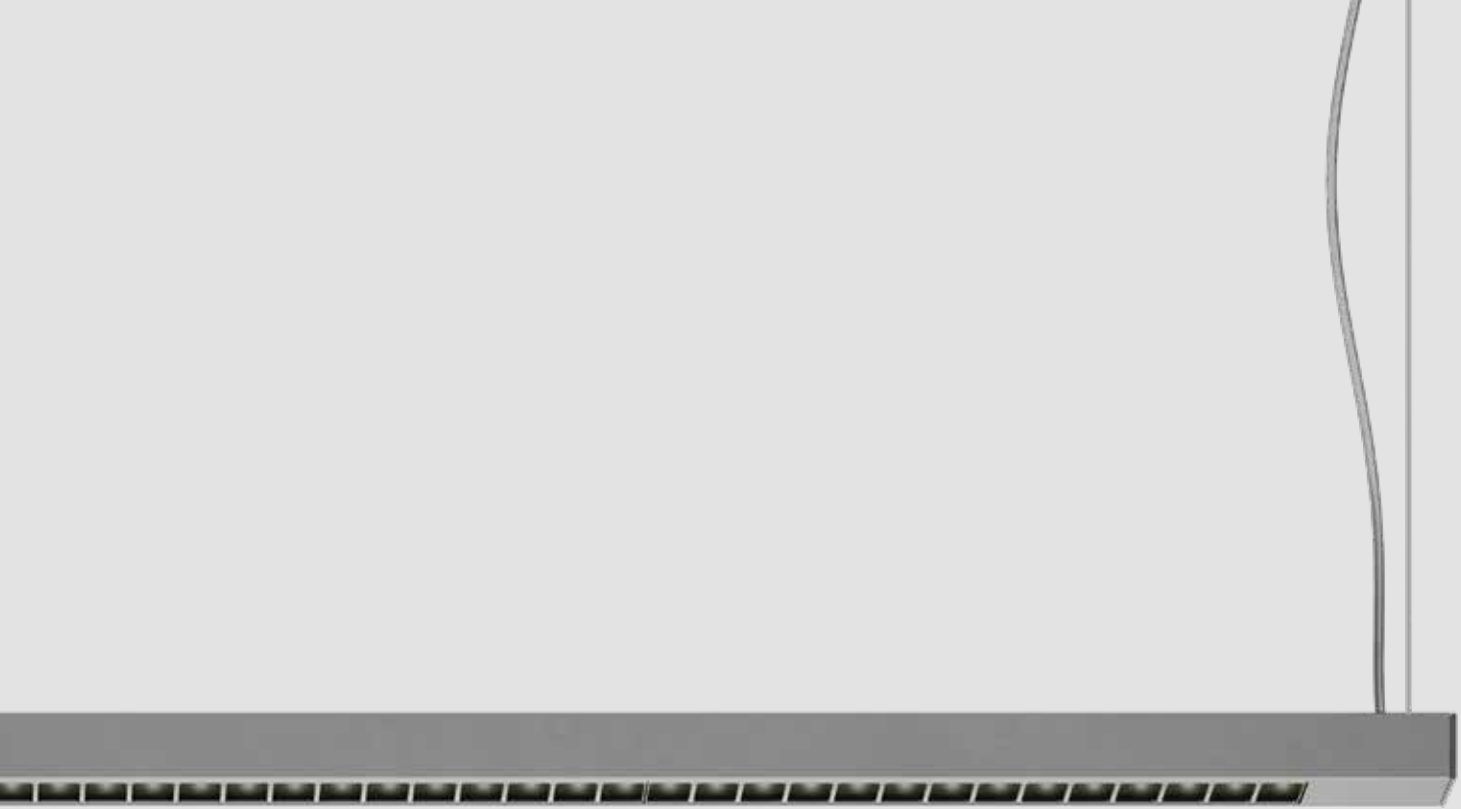

Turn Around Suspension shares the same design principles of Turn Around system starting from parameters of sustainability, reduction, lightness, integration, optoelectronic intelligence, application freedom and interaction. It also shares the same components of Turn Around Floor, integrating in the minimal structure two different lighting performances.

Turn Around Suspension combines a direct controlled emission to an indirect diffused emission manageable together. The high efficiency and the perfect control of the lighting emission make Turn Around Suspension an optimal solution for workplaces.

Controlled direct emission



Refractive emission

Refractive lens
collects 100% of the LED luminous flux

High Efficacy
up to 135 lm/W


Extreme glare control
UGR < 19

Diffused indirect emission



Combined management



Direct and Indirect emission
DALI/Push

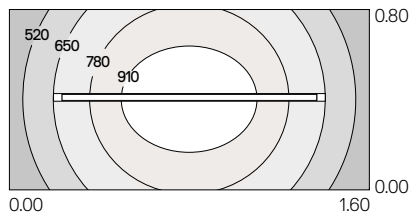

Refractive Direct + Diffused Indirect
 Head h 2100 mm - Desk h 750 mm
 $E_{av} = 732 \text{ lx}$ $u_0 = 0,526$
 Power: 17W Direct + 17W Indirect
 Flux: 1940 lm + 7500 lm (3000K)

Lighting calculation parameters used for Isolux diagrams:
 Office with a single workstation.
 Length x width x height: 5.00 x 5.00 x 2.70m
 Reflection factor ceiling/wall/floor: 70/50/20%
 Desk: 1.60 x 0.80 x 0.75m
 Maintenance factor: 0.90 WF

Turn Around Suspension

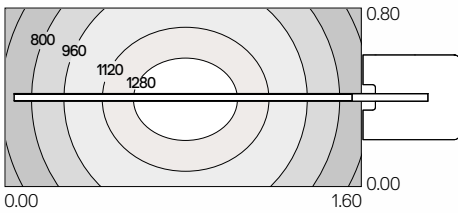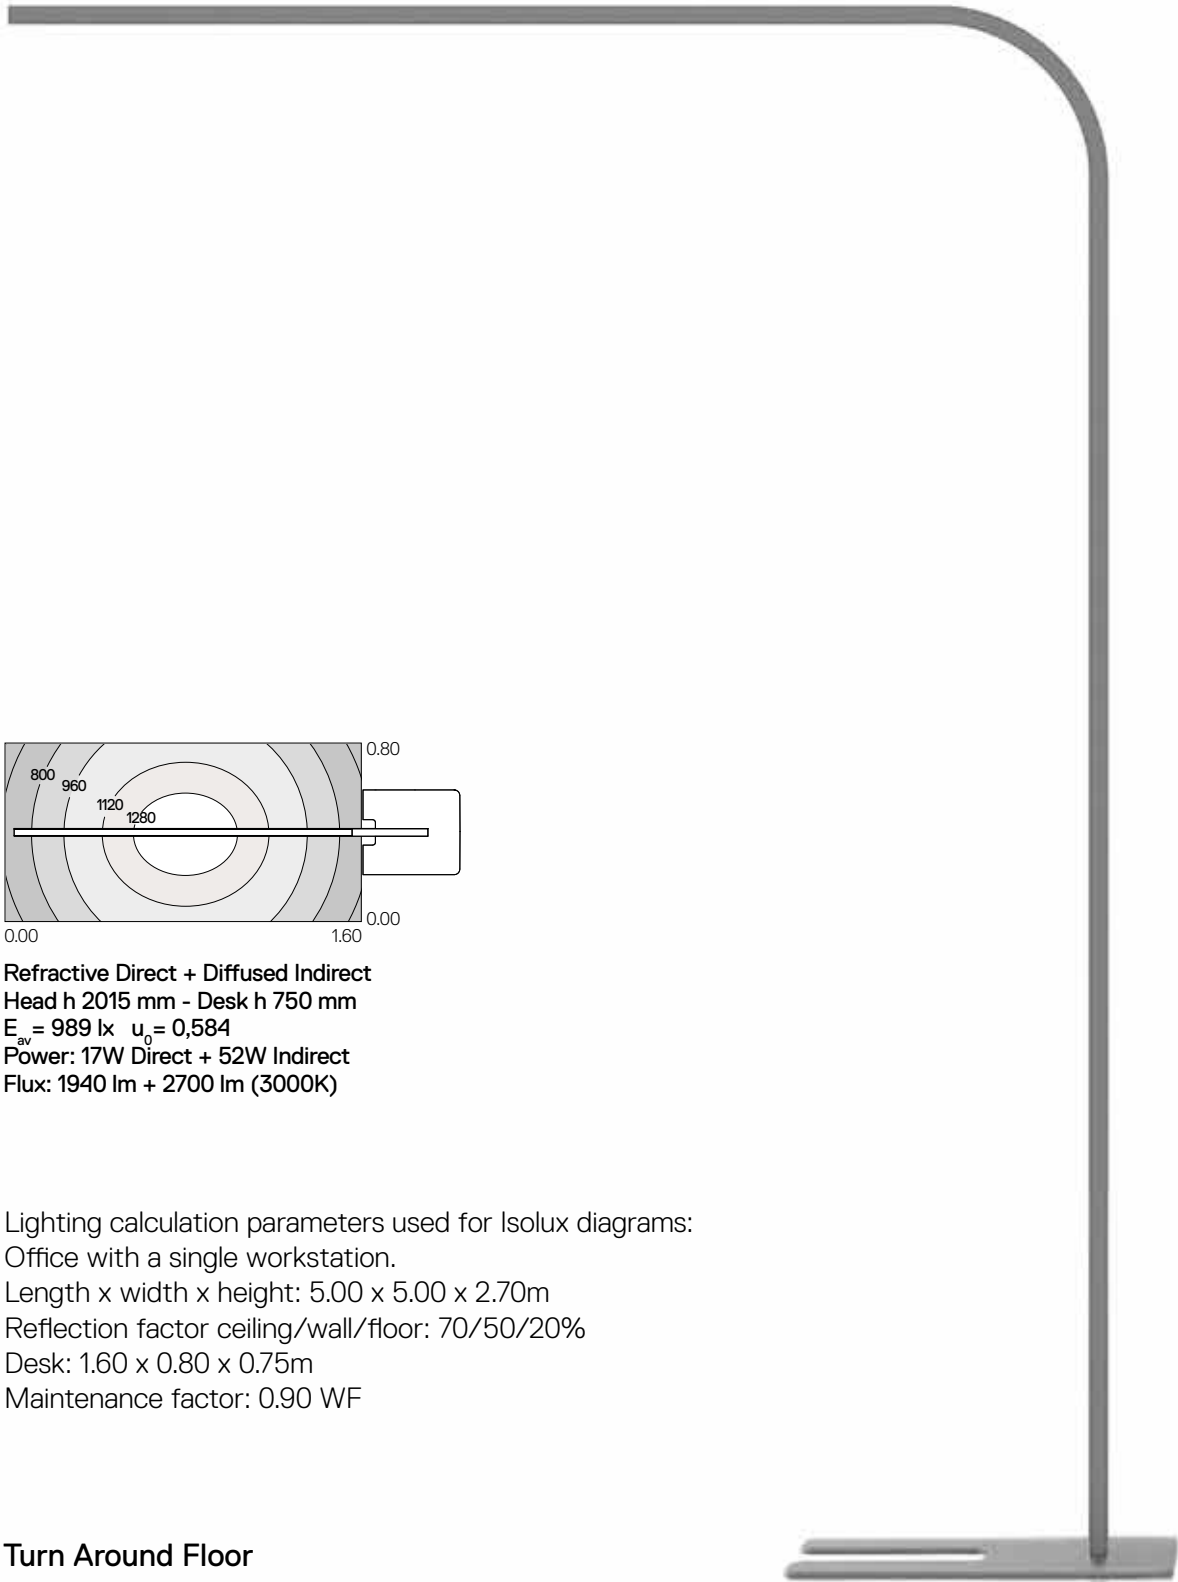

Refractive Direct + Diffused Indirect
Head h 2015 mm - Desk h 750 mm
 $E_{av} = 989 \text{ lx}$ $u_0 = 0,584$
Power: 17W Direct + 52W Indirect
Flux: 1940 lm + 2700 lm (3000K)

Lighting calculation parameters used for Isolux diagrams:
Office with a single workstation.
Length x width x height: 5.00 x 5.00 x 2.70m
Reflection factor ceiling/wall/floor: 70/50/20%
Desk: 1.60 x 0.80 x 0.75m
Maintenance factor: 0.90 WF

Turn Around Floor



TURN AROUND SUSPENSION

Titanium



MacAdam 3SDCM
CRI = 90



IP20

Turn Around Suspension, direct + indirect emission

W	Flux	CCT
17W direct	1820 lm	2700K
17W indirect	2540 lm	2700K
17W direct	1940 lm	3000K
17W indirect	2700 lm	3000K
17W direct	1940 lm	4000K
17W indirect	2700 lm	4000K

Dimmable DALI/Push

Code
TF21022
TF22022
TF23022

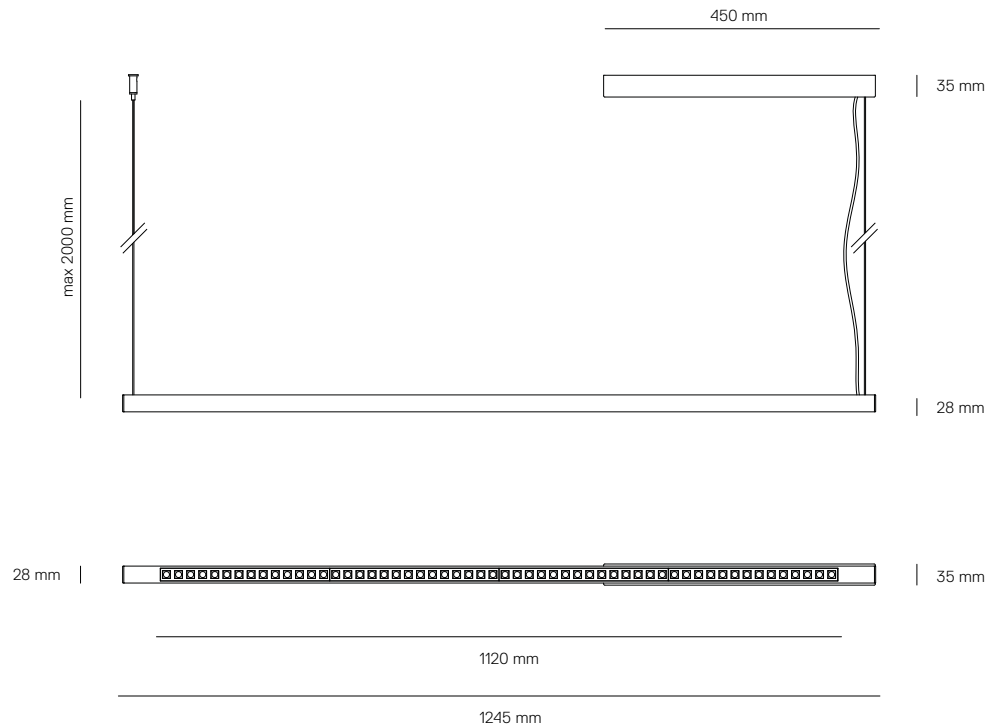





ATTIMI

BY HEINZ BECK

COFFEE & AROUND BISTROT APERITIVO DINING





↑ DINING

↑ APERITIVO

↑ BISTROT













Ristorante Olmo, Comaredo, Italy, ph. Michele Nasasi | 202

Headquarters

Artemide S.p.A.
Via Bergamo, 18
20006 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Artemide S.p.A.
si riserva la facoltà di modificare, in qualunque
momento e senza preavviso, le caratteristiche
tecniche degli elementi illustrati nel presente
catalogo.

Artemide S.p.A.
reserves the right to change, at any time and
without prior warning, the technical specifications
of any product illustrated in this catalogue.

Artemide S.p.A.
se réserve le droit de modifier, à n'importe
quel moment et sans préavis, les caractéristiques
techniques des éléments illustrés dans ce
catalogue.

Artemide S.p.A.
behält sich das Recht vor jederzeit und ohne
Ankündigung die technischen Daten der im
Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.
se reserva la facultad de modificar, en cualquier
y sin aviso previo, las características técnicas
de los elementos ilustrados en el presente
catálogo.

2024 updated version. V.7