

B202D -TL40 - S3050 - B1 - M 750W - B

型號
Model

孔型與每轉移動量
Hole type and movement per revolution

行程
Stroke

馬達方向
Motor direction

馬達廠牌及出力
Motor brand and output

煞車
Brake

T 底部通孔
Through hole
Y 底部牙孔
Thread hole

馬達方向 Motor direction

B1 馬達左折上端 Motor leftward,upper position
B2 馬達右折上端 Motor rightward,upper position
B3 馬達左折水平 Motor leftward,horizontal position
B4 馬達右折水平 Motor rightward,horizontal position
B5 馬達左折下端 Motor leftward,lower position
B6 馬達右折下端 Motor rightward,lower position



馬達廠牌及出力 Motor brand and output

H 上銀 Hiwin
X 西門子 Siemens
M 三菱 Mitsubishi
Y 安川 Yaskawa
P 松下 Panasonic
F 富士 Fuji
T 台達 Delta

B202D規格表(B202D Specification):

馬達出力 AC Servo motor output(W)	750W
重覆定位精度 Repeatability(mm)	±0.04
每轉移動量 Equivalent to lead(mm)	39.9515
最大載重 Maximun payload(kg)	55
最快速度 Maximun speed(mm/sec)	2000
行程 Stroke(mm)	150~3050 100間隔 (interval)

線性滑軌23x22-2支 (Linear Guide23x22-2 個)



水平安裝應用(單位:mm)
Horizontal use


	90°	45°	0°
25kg	2158	1831	581
40kg	1488	1211	339
55kg	1052	730	278

牆面安裝應用(單位:mm)
Wall installation use

	90°	45°	0°
25kg	583	745	2010
40kg	408	446	1705
55kg	315	388	1052


*滑塊表面中心到搬送物重心的距離(僅供參考)
Distance center of slider top to center of gravity of object being transported (For reference only)

靜態容許負載慣量
Static Loading Moment




(單位:N.m) (Unit:N.m)
水平使用時 Static Loading Moment


MY	2052
MP	2052
MR	1810




B1




B2

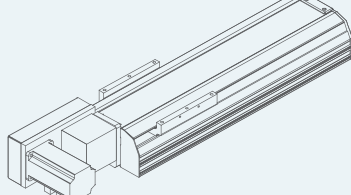


B3



B4




B5



B6


B1

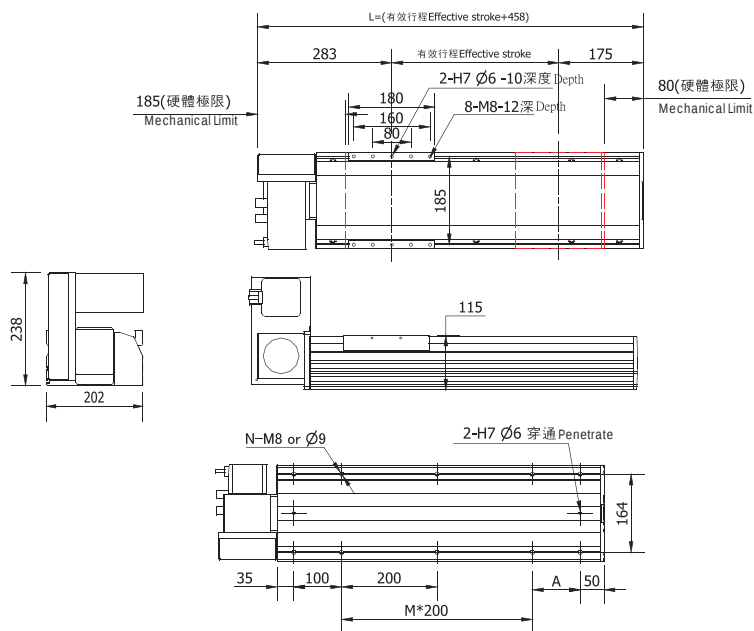

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	608	708	808	908	1008	1108	1208	1308	1408	1508	1608	1708	1808	1908	2008	2108	2208	2308	2408	2508	2608	2708	2808	2908	3008	3108	3208	3308	3408	3508
A	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34
重量(kg)	22.2	24.4	26.6	28.8	31.0	33.3	35.4	37.6	39.8	42.0	44.2	46.4	48.6	50.8	53.0	55.2	57.4	59.6	61.8	64.0	66.2	68.4	70.6	72.8	75.0	77.2	79.4	81.6	83.8	86.0

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


B2

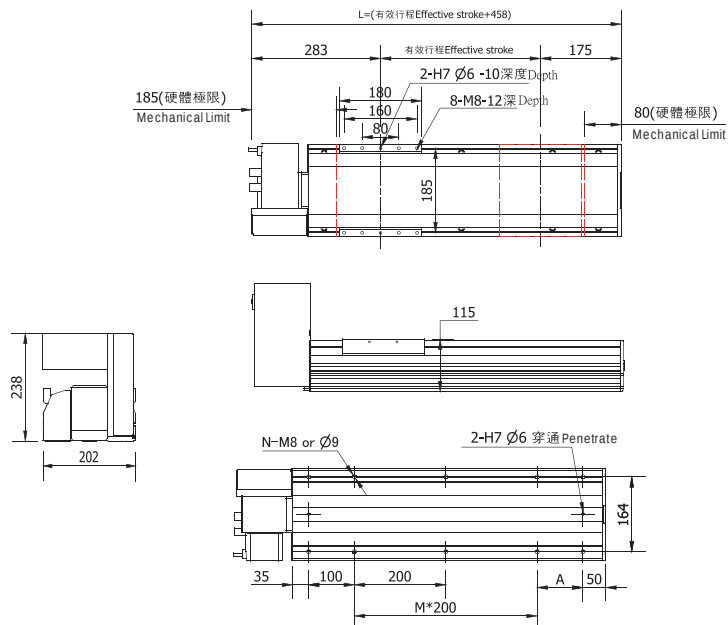

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	608	708	808	908	1008	1108	1208	1308	1408	1508	1608	1708	1808	1908	2008	2108	2208	2308	2408	2508	2608	2708	2808	2908	3008	3108	3208	3308	3408	3508
A	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34
重量(kg)	22.2	24.4	26.6	28.8	31.0	33.3	35.4	37.6	39.8	42.0	44.2	46.4	48.6	50.8	53.0	55.2	57.4	59.6	61.8	64.0	66.2	68.4	70.6	72.8	75.0	77.2	79.4	81.6	83.8	86.0

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


B3

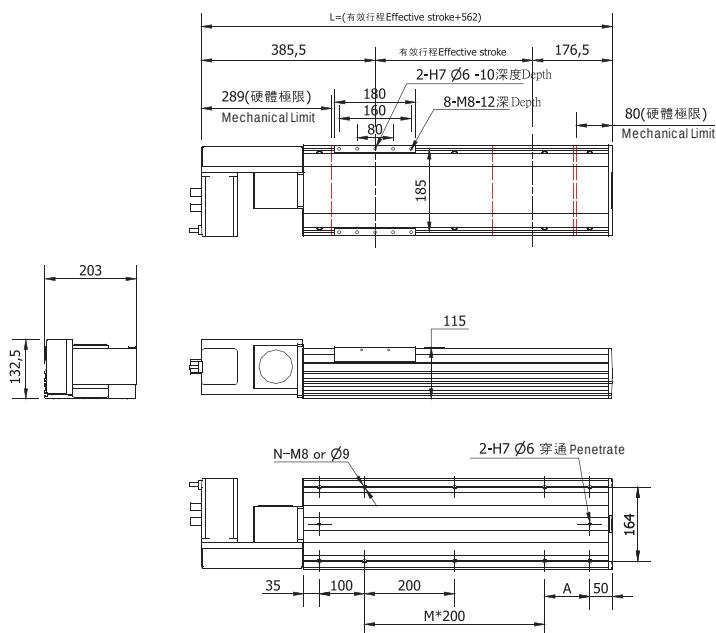

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	713	813	913	1013	1113	1213	1313	1413	1513	1613	1713	1813	1913	2013	2113	2213	2313	2413	2513	2613	2713	2813	2913	3013	3113	3213	3313	3413	3513	3613
A	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34
重量(kg)	22.2	24.4	26.6	28.8	31.0	33.3	35.4	37.6	39.8	42.0	44.2	46.4	48.6	50.8	53.0	55.2	57.4	59.6	61.8	64.0	66.2	68.4	70.6	72.8	75.0	77.2	79.4	81.6	83.8	86.0

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


B4

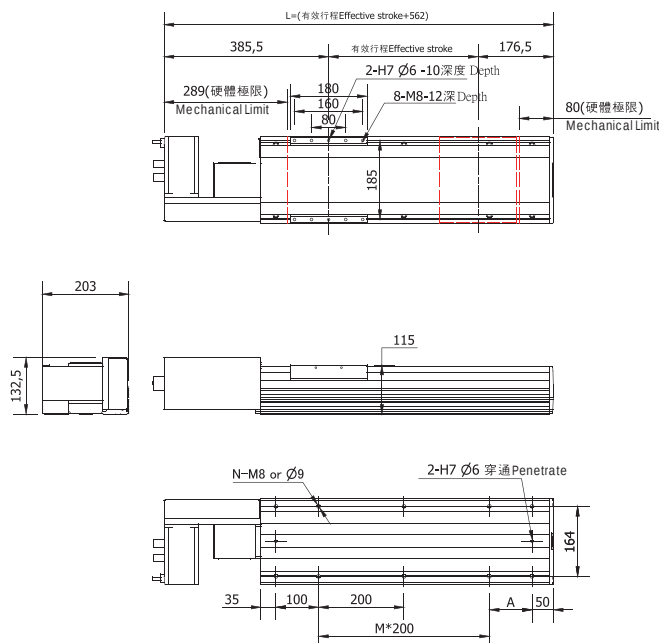

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	713	813	913	1013	1113	1213	1313	1413	1513	1613	1713	1813	1913	2013	2113	2213	2313	2413	2513	2613	2713	2813	2913	3013	3113	3213	3313	3413	3513	3613
A	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34
重量(kg)	22.2	24.4	26.6	28.8	31.0	33.3	35.4	37.6	39.8	42.0	44.2	46.4	48.6	50.8	53.0	55.2	57.4	59.6	61.8	64.0	66.2	68.4	70.6	72.8	75.0	77.2	79.4	81.6	83.8	86.0

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


B5

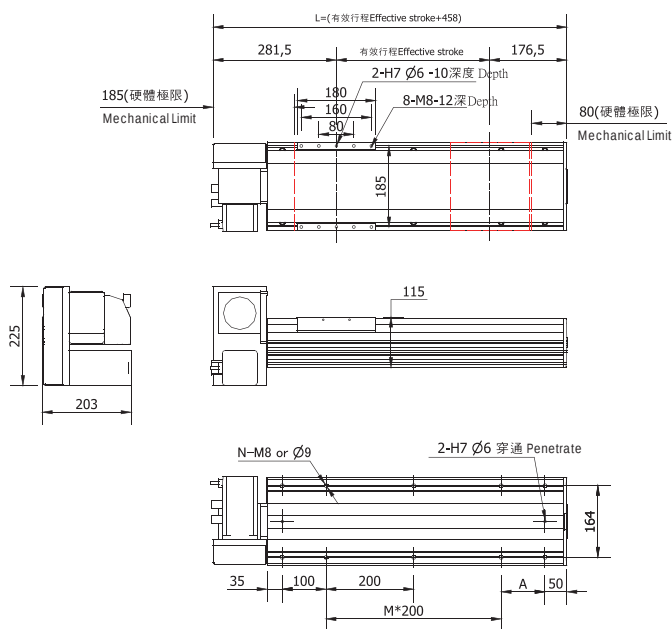

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	608	708	808	908	1008	1108	1208	1308	1408	1508	1608	1708	1808	1908	2008	2108	2208	2308	2408	2508	2608	2708	2808	2908	3008	3108	3208	3308	3408	3508
A	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34
重量(kg)	22.2	24.4	26.6	28.8	31.0	33.3	35.4	37.6	39.8	42.0	44.2	46.4	48.6	50.8	53.0	55.2	57.4	59.6	61.8	64.0	66.2	68.4	70.6	72.8	75.0	77.2	79.4	81.6	83.8	86.0

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.

B6

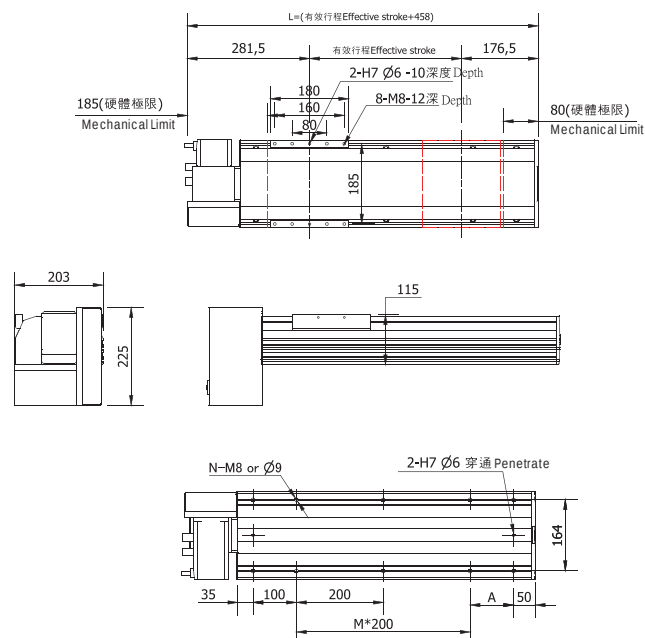

行程 Stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050
L	608	708	808	908	1008	1108	1208	1308	1408	1508	1608	1708	1808	1908	2008	2108	2208	2308	2408	2508	2608	2708	2808	2908	3008	3108	3208	3308	3408	3508
A	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200	100	200
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34
重量(kg)	22.2	24.4	26.6	28.8	31.0	33.3	35.4	37.6	39.8	42.0	44.2	46.4	48.6	50.8	53.0	55.2	57.4	59.6	61.8	64.0	66.2	68.4	70.6	72.8	75.0	77.2	79.4	81.6	83.8	86.0

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.