




**LPQ 6600 TE DUCTED SYSTEM  
CONSISTS OF:**

Air cooled condensing unit with system parameters for 6600 btu when:  
@ 38°F suction & 90°F ambient temperature with a 10° temperature differential of air flow over fan coil

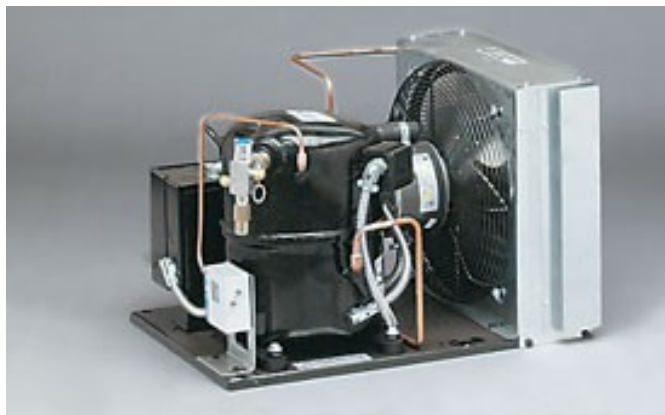

<b>Condensing Unit:</b>	CU66
<b>Horsepower:</b>	1/2
<b>Refrigerant:</b>	R134a
<b>Voltage:</b>	115/1/60
<b>MCA (Amps):</b>	15.5
<b>Length (In.):</b>	20.6
<b>Width (In.):</b>	13.9
<b>Height (In.):</b>	13.2
<b>Connection Suction (In.):</b>	1/2 S
<b>Connection Liquid (In.):</b>	1/4 S
<b>Connection Type:</b>	Flare
<b>Compressor:</b>	AKA4476YXA
<b>Oil:</b>	Polyol Ester
<b>Receiver Cap. 90 % Full (Lbs.):</b>	3.5
<b>Shipping Weight (Lbs.):</b>	83
<b>Features:</b>	Dual Pressure
<b>LTL Only:</b>	Yes
<b>Oil_short:</b>	POE



<b>Evaporator:</b>	
<b>Part No.:</b>	2/ LPA27-23Q
<b>Voltage:</b>	115v
<b>MCA (Amps):</b>	0.4a
<b>Length (In.):</b>	40.5"
<b>Width (In.):</b>	14.5"
<b>Height (In.):</b>	4.75"
<b>Shipping Weight (Lbs.):</b>	29 lbs.
<b>Connection Suction (In.):</b>	0.50"
<b>Connection Liquid (In.):</b>	0.38"
<b>Drain Line (In.):</b>	0.50"
<b>CFM:</b>	275 each

**System Line Set:**

**Between Coils:**

<b>Suction (In.):</b>	3/8"
<b>Liquid (In.):</b>	1/4"

**After "T"**

<b>Suction:</b>	1/2"
<b>Liquid:</b>	3/8"