

M6

Outdoor SMD Rental Screen
















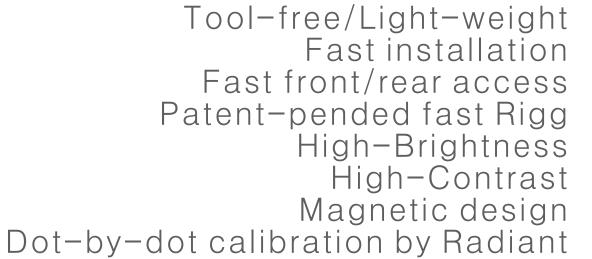
















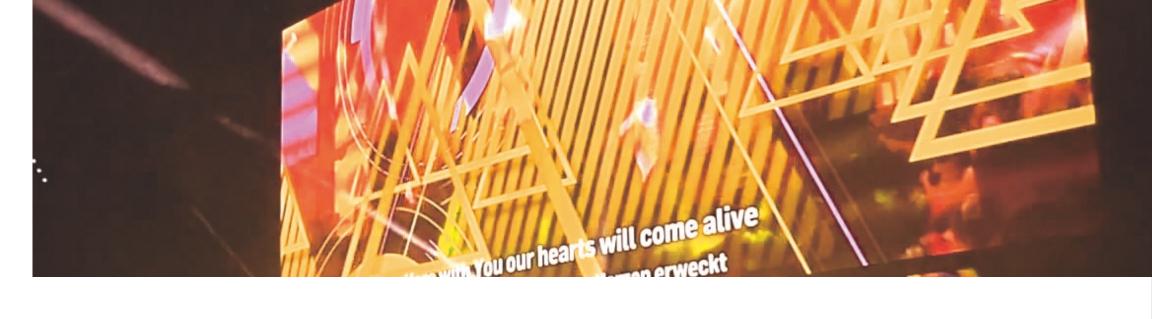

Pitch: 6.25mm

≥5000nit after calibrating **Brightness:**

LED type: Nationstar 2727 3-in-1 black body SMD

SMD feature: Black-frame, High-Brightness, High-Contrast IC driver: MBI5151, high grayscale at low brightness,

also good for indoor

Scan mode: 1/4

Refresh rate: ≥3000Hz +80°/-80° Horiz. angle: +60°/-60° Vert. angle: >3000:1 Contrast:

Power: Max.550W/m²,Rated190W/m²

Volt./Freq: AC $110\sim240\text{V}/50\sim60\text{Hz}$ Panel size: 800x900x65mm(WxHxD)G.W: 22kg/m²,light-weight

IP(front/rear): IP65/IP54 Temperature: **-20°**℃ ~60°€

Features: Fast installation, Tool-free, Fast front/rear

maintenance, Patent-pended fast Rigg,

Special mask against sunshine,

Floor-stacking setup optional for panel

Certificate: CE, EMC, TUV, RHoS, UL