SPECIFICATION SHEET

S É U R A



SÉURA OUTDOOR TVS

Storm

For shaded locations, Séura Storm[™] Outdoor TVs provide optimized picture calibration complete with anti-glare glass, displaying a beautiful picture, even in ambient outdoor light. Storm is the perfect choice for covered patios and cabanas.

IDEAL SPACES

Covered Patios Shaded Decks Cabanas

DISPLAY SIZES 42 inch 55 inch 65 inch 84 inch

PROTECTIVE GLASS

Anti-reflective and anti-glare safety glass

TEMPERATURE RANGE -24°F to 122°F



FULLY WEATHERPROOF Séura Outdoor TVs are carefully designed and tested to thrive outside year-round, no matter how brutal the climate or conditions.



TRIPLE-LOCK SEAL™


Séura's Triple-Lock Seal provides three barriers of protection against dust, moisture, ice, and insects. It is so durable, that your Séura will thrive, whatever the weather.



ANTI-REFLECTIVE AND ANTI-GLARE Séura utilizes an anti-reflective coating on the inside of the glass to reduce reflections, and a satinlike matte finish on the outside of the glass to cut glare and diffuse light. Remarkable picture clarity shines through and provides outdoor entertainment without distraction.



65 AND 84 INCH CONNECTIONS

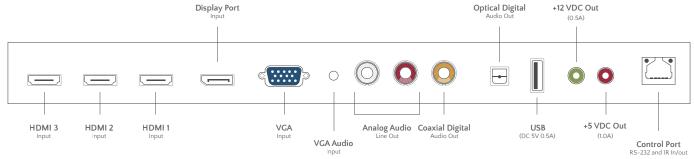

		42 INCH TV Model: 42-S, Version: 3	55 INCH TV Model: 55-S, Version: 3	65 INCH TV Model: 65-S, Version: 4	84 INCH TV Model: 84-S, Version: 4
GENERAL	PROTECTIVE GLASS	Anti-reflective and anti-glare safety glass			
	OPERATING TEMPERATURE RANGE	-24°F to 122°F*			
	OPERATING HUMIDITY RANGE	20–80% RH, non-condensing			
	WATERPROOF RATING	IP Rated†			
	ISOTROPIC PREVENTION	High TNI panels prevent screen blackout			
	UV PROTECTION	Anti-reflective and anti-glare safety glass reflects UV rays			
VIDEO	VIEWABLE SCREEN SIZE	36.6" w x 20.6" h	47.6" w x 26.8" h	55.5" w x 31.5" h	73.25" w x 41.2" h
	DISPLAY RESOLUTION	1920 x 1080	1920 x 1080	3840 x 2160	3840 x 2160
	DISPLAY BRIGHTNESS	700 cd/m2	700 cd/m2	450 cd/m2	450 cd/m2
	ASPECT RATIO	16:9	16:9	16:9	16:9
	CONTRAST RATIO	Typical 4000:1	Typical 4000:1	Typical 5000:1	Typical 5000:1
	TUNER	ATSC	ATSC	N/A	N/A
	RESPONSE TIME	8 ms	8 ms	8 ms	12 ms
	VIEWING ANGLE	178° Horizontal/Vertical	178° Horizontal/Vertical	178° Horizontal/Vertical	178° Horizontal/Vertical
	POWER CONSUMPTION	0.4W Standby, 99.6W Max	0.4W Standby, 133W Max	0.4 W Standby, 183W Max	0.4 W Standby, 465 W Max
INTEGRATION	HDMI	3	3	3	3
	COMPONENT YPBPR	1	1	0	0
	COMPOSITE (AV)	2	2	0	0
	VGA	1	1	1	1
	COAX	1	1	0	0
	DISPLAY PORT	0	0	1	1
	USB	1	1	1	1
	IR IN/OUT RS-232	RJ-45	RJ-45	RJ-45	RJ-45
	+12 VDC OUT	1	1	1	1
	+5 VCD OUT	1	1	1	1
INSTALLATION AUDIO	AUDIO: VGA/PC INPUT	1	1	1	1
	AUDIO: ANALOG AUDIO LINE OUT	2	2	1	1
	AUDIO: OPTICAL DIGITAL OUT	1	1	1	1
	AUDIO: COAXIAL DIGITAL OUT	1	1	1	1
	INTERNAL SPEAKERS	2 x 10W	2 x 10W	2 x 10W	2 x 10W
	PRODUCT DIMENSIONS	39.7" w x 23.7" h x 2.7" d	50.8" w x 30.0" h x 2.7" d	59.3" w x 34.8" h x 2.7" d	77.5" w x 45.7" h x 2.7" d (3.5" d with handles)
	PRODUCT WEIGHT	54 lbs.	89 lbs.	114 lbs.	200 lbs.
	VESA PATTERN	400mm x 400mm	400mm x 400mm	400mm x 400mm	600mm x 400mm
OTHER	CERTIFICATIONS AND COMPLIANCE	FCC, MET	FCC, MET	FCC, MET	FCC, MET
	WARRANTY	Séura's labor for three (3) years; glass, structure, frame, and assembly for three (3) years; TV including remote and power supply for two (2) years.			
	REMOTE	Séura IR Remote Control			

 \star Installation in sunlight reduces the maximum permitted air temperature.

+ IP Rating is an international standard that specifies the degree of protection against dust and water ingress. Séura Outdoor TVs are IP rated and designed to protect against rain, snow, ice, dust, and other outdoor elements.

