





SÉURA OUTDOOR TVS

Ultra Bright

For sunny locations, Séura Ultra Bright™ Outdoor Displays provide industry-leading image quality and 1000-nit brightness for a remarkable picture in any lighting condition, including full-sun viewing.

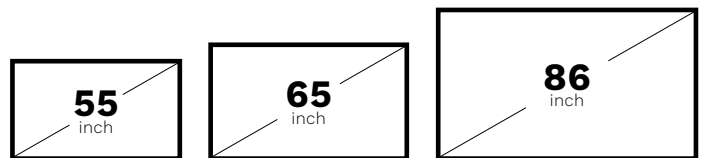

Extreme Temperature Protection™

Our proprietary active heating and cooling system provides the necessary temperature control you need to protect your TV's delicate electronic components in temperatures from -40°F to 140°F.



Weatherproof

IP54 rated and fully sealed to keep out rain, snow, ice and dust, Séura outdoor TVs are safe for year-round use.



Adaptive Picture Technology™

Séura's own proprietary Adaptive Picture Technology continuously adjusts multiple settings as lighting conditions change so you always see the optimal picture, whether the sun is out or behind the clouds.



Brightest In Class

With 1,000-nit brightness that is 30% brighter than competitive full sun TVs, you'll catch your favorites, even when viewing in direct sunlight.



Lifelike Shades and Hues

Equipped with High Dynamic Range, Séura outdoor TVs provide sharp contrast between bright and dark colors for the best outdoor picture.



Stunning Definition

4K UHD picture clarity — four times the resolution of regular HD — has amazingly sharp details that immerse you in the moment.



UV Protected


UV and isotropic blackout protection mean your picture will never go dark from exposure to sunlight.



2-Year Warranty

2-year warranty provides peace-of-mind for reliable and safe entertainment in any environment.

CONNECTIONS

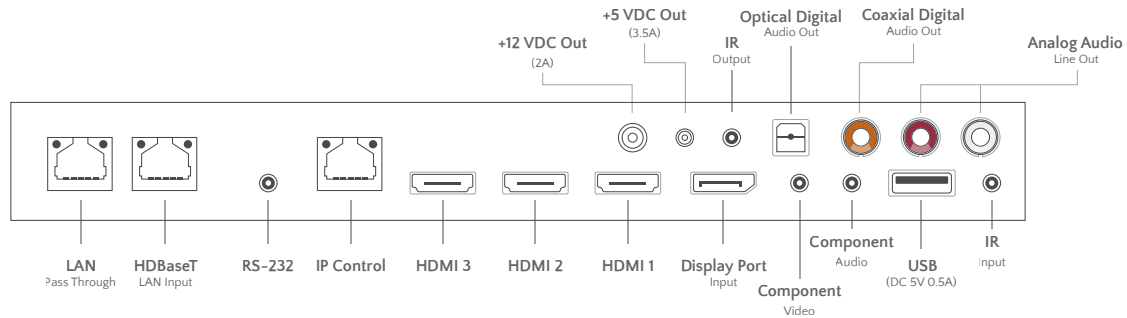

55 INCH 4K UHD
Model: STM3-55-U

65 INCH 4K UHD
Model: STM3-65-U

86 INCH 4K UHD
Model: STM3-86-U

	55 INCH 4K UHD Model: STM3-55-U	65 INCH 4K UHD Model: STM3-65-U	86 INCH 4K UHD Model: STM3-86-U	
GENERAL	OPERATING TEMPERATURE RANGE	-40°F to 140°F*		
	IDEAL OPERATING TEMPERATURE	32°F to 122°F		
	NON-OPERATING TEMPERATURE	-40°F to 140°F		
	OPERATING HUMIDITY RANGE	10-90% RH, non-condensing		
	WATERPROOF RATING	IP54 Minimum Rating [†]		
	ISOTROPIC PREVENTION	High TNi panels help to prevent screen blackout		
VIDEO	DISPLAY RESOLUTION	3840 x 2160		
	FRAME RATE	60Hz		
	DISPLAY BRIGHTNESS	1000 cd/m2	800 cd/m2	
	ASPECT RATIO	16:9	16:9	16:9
	CONTRAST RATIO	Typical 1000:1	Typical 1100:1	Typical 1200:1
	TUNER	N/A	N/A	N/A
	RESPONSE TIME	8 ms	8 ms	8 ms
	VIEWING ANGLE	178° Horizontal/Vertical	178° Horizontal/Vertical	178° Horizontal/Vertical
	POWER CONSUMPTION, DISPLAY	Standby: 3.5W Heating: 200W Normal: 175W Max	Standby: 3.5W Heating: 200W Normal: 200W Max	Standby: 3.5W Heating: 345W Normal: 425W Max
	POWER CONSUMPTION, AC OUTLET	Max 200W		
	DC OUTPUT	Max 41.5W (12V 2A, 5V 3.5A)		
INTEGRATION	HDMI	3		
	HDBaseT™	1 Port with LAN Out		
	COMPONENT YPbPr	1		
	DISPLAY PORT	1		
	LAN PORT	1 (IP Control)		
	RS-232C	1		
	IR INPUT	1		
	IR OUTPUT	1		
	Service Port	1 (USB Type)		
	DC OUT	12V-Max 2A, 5V-Max 3.5A		
AC OUT	100-240V~, 50/60Hz, Max 200W Outlet			
AUDIO	AUDIO: COMPONENT AUDIO INPUT	1		
	AUDIO: ANALOG LINE OUT	1		
	AUDIO: OPTICAL DIGITAL OUT	1		
	AUDIO: COAXIAL DIGITAL OUT	1		
	INTERNAL SPEAKERS	N/A		
INSTALLATION	PRODUCT DIMENSIONS	50.0" w x 29.1" h	58.6" w x 34.0" h	77.0" w x 44.4" h
	PRODUCT DEPTH	3.7"	3.7"	3.7"
	PRODUCT WEIGHT	70.5 lbs.	96.1 lbs.	154.3 lbs.
	COMPARTMENT DIMENSIONS	11" w x 8" h x 1.5" d	11" w x 8" h x 1.5" d	11" w x 8" h x 1.5" d
	VESA PATTERN	400 x 400mm		600 x 400mm
OTHER	CERTIFICATIONS AND COMPLIANCE	FCC, MET		
	WARRANTY	Séura warrants Outdoor Displays with respect to Séura's labor, structure, assembly, display including remote, and power supply for two (2) years.		
	REMOTE	Séura Water Resistant IR Remote Control		

* The screen is most optimally viewed at ambient temperatures of 32°F to 122°F. Installation in sunlight reduces the maximum permitted air temperature.

† IP Rating is an international standard that specifies the degree of protection against dust and water ingress. Séura Outdoor TVs are IP rated and designed to protect against rain, snow, ice, dust, and other outdoor elements.



1230 Ontario Road Green Bay, Wisconsin 54311
1-800-957-3872 contacts@seura.com
www.seura.com

Publish date: May 5, 2021. Information is subject to change without notice.

© 2021 Séura