

CLICK LINK FOR FULL INSTALLATION INSTRUCTIONS

seura.com/manuals

LED LIGHTING SPECIFICATIONS

4.6 W/FT


3000K COLOR TEMPERATURE **DRIVER SPECIFICATIONS**

INPUT: 120V, 50/60Hz

Dimming

REQUIRES GFCI

Letter Key:
A: 24.000
B: 36.000
C: 12.500
D: 21.800
E: 9.000
F: 20.500
G: 14.500
H: 14.625
J: 33.800
K: 21.000

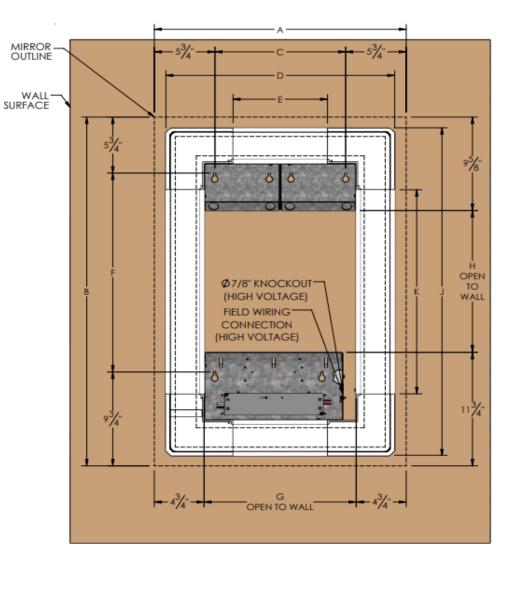

Model Number LMR-2400x3600-RE-AL-COB5-SR- ES-DM	Date Created 17/FEB/2023	Revised Date	TOLERANCES (UNLESS OTHERWISE NOTED) FRACTIONAL: 1/8" ANGULAR: 1.0 TWO PLACE DECIMAL: .03"	PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF THE MANUFACTURER. ANY REPRODUCTION IN PART, OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF MANUFACTURER, IS PROHIBITED	SHEET 2
			THREE PLACE DECIMAL: .015"	RUNIBILED	

ADHESION BY:


Notes:


GLASS ADHESION

- MIRROR SHOWN FROM REAR

- ADHERE MOUNTING BRACKETS TO MIRROR

USING SOP S-P-FI-02



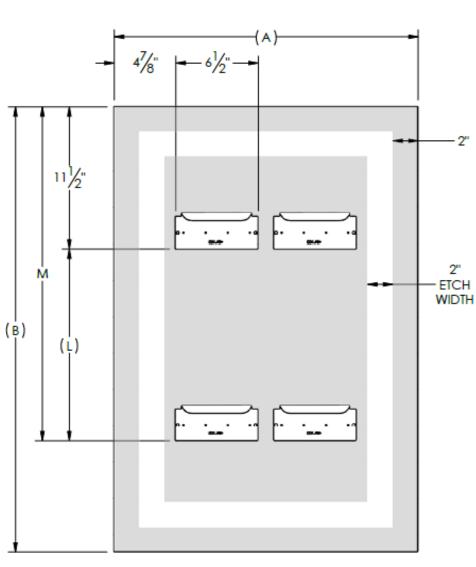

Model Number LMR-2400x3600-RE-AL-COB5-SR-ES-DM	Date Created 17/FEB/2023	Revised Date	Drawn By	PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF THE MANUFACTURER. ANY REPRODUCTION IN PART, OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF MANUFACTURER, IS PROHIBITED	SHEET 3
---	-----------------------------	--------------	----------	--	------------