


DATE CREATED: 19/SEP/2023

ITEM: LMR-2400x3200-RE-HA-COB5-SR-ES-DM-SL-PK1

DESCRIPTION: 24" (W) x 32" (H) HALO Hard-Wired Custom Surface-Mounted Lighted Mirror

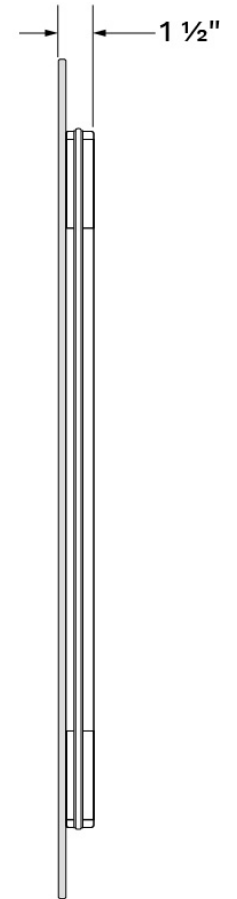

Letter Key (inches)

A: 24

B: 32



SIGNATURE



DATE

INSTRUCTIONS

Please sign and date this page before returning to Séura signifying you agree to all specifications shown on all drawing sheets. The build process begins when this authorization is received. For drawings that require revisions, send the changes to Séura noted on the original drawing. A revised drawing package will be sent for final signature.

TOLERANCES (Unless Otherwise Noted)

Fractional: 1/8 in
 Angular: 1.0
 Two-place Decimal: .03 in
 Three-place Decimal: .015 in

PROPRIETARY AND CONFIDENTIAL

The information contained in this document is the sole property of Séura. Any reproduction in part, or as a whole, without written permission from Séura is prohibited.

HOUSING DIMENSIONS

LED Lighting Specifications

4.6 W/FT
3000K COLOR TEMPERATURE


LED Driver Specifications

INPUT: 120V, 50/60Hz
Dimming

View More Specifications and Installation Instructions: seura.com/manuals

Letter Key (inches)

A: 24
B: 32
D: 18
E: 5.200
F: 12 11/16
G: 10 3/4
H: 6 3/4
J: 26
K: 13.200
N: 7 15/16

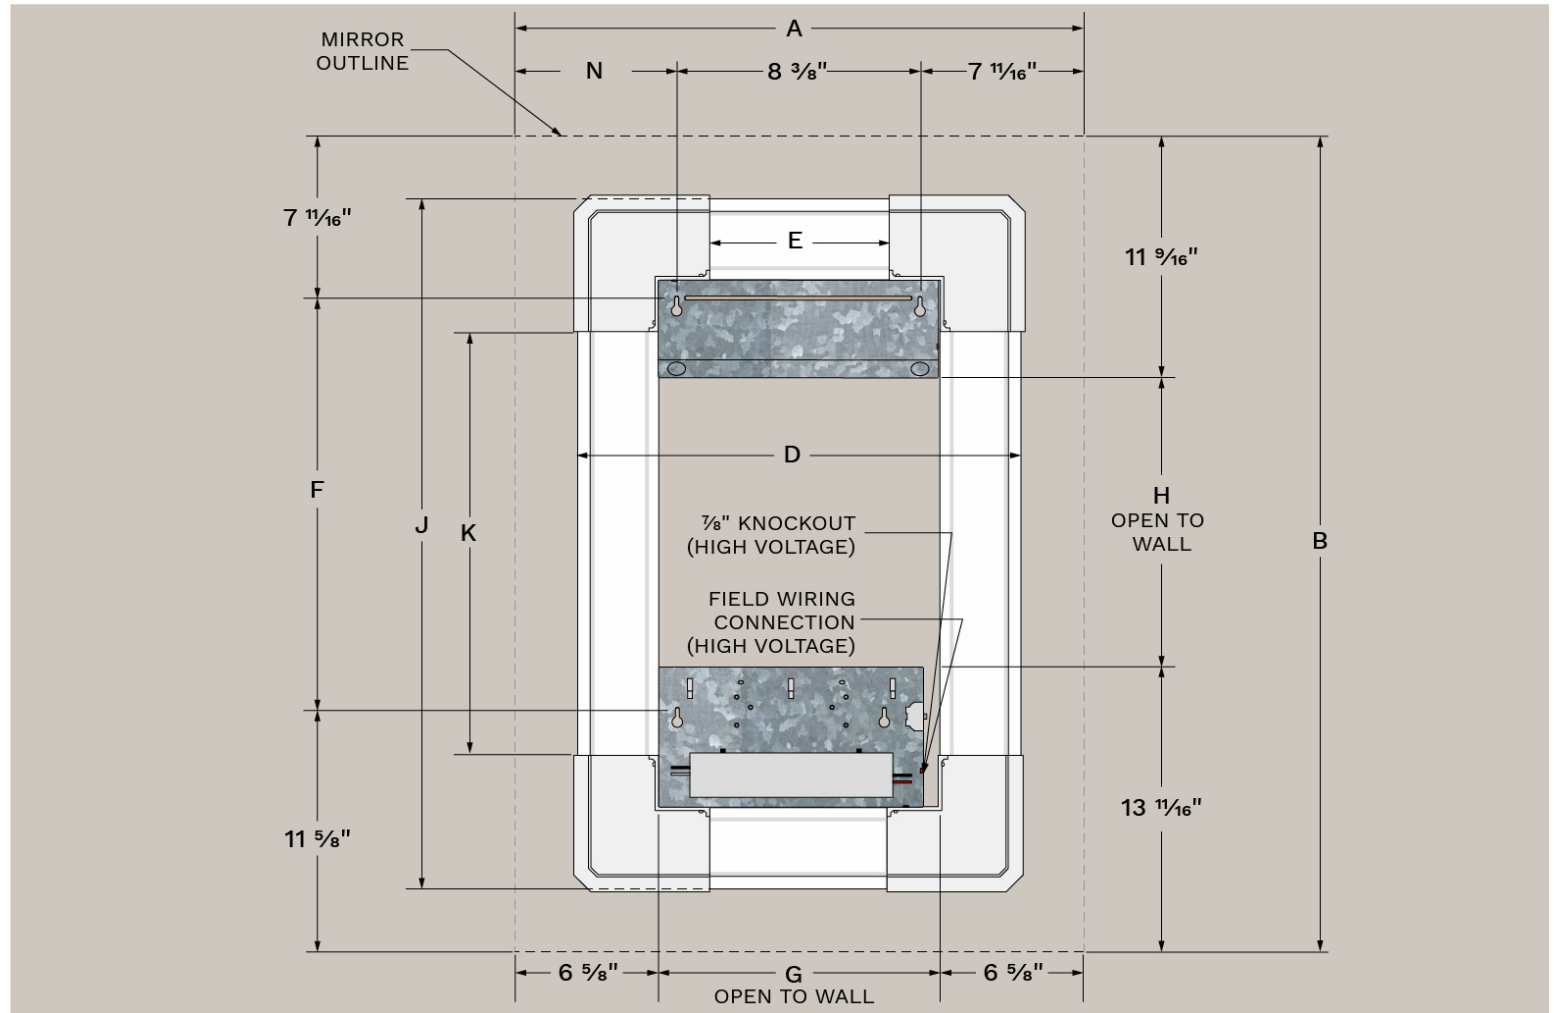

MODEL NUMBER: LMR-2400x3200-RE-HA-COB5-SR-ES-DM-SL-PK1

DATE CREATED: 19/SEP/2023

TOLERANCES (Unless Otherwise Noted)

Fractional: 1/8 in
Angular: 1.0
Two-place Decimal: .03 in
Three-place Decimal: .015 in

PROPRIETARY AND CONFIDENTIAL

The information contained in this document is the sole property of Séura. Any reproduction in part, or as a whole, without written permission from Séura is prohibited.

GLASS ASSEMBLY

Adhesion by: _____(Initial) _____(Date)

Notes:

- Mirror is shown from rear
- Adhere mounting brackets to mirror using SOP S-P-FL-02

Letter Key (inches)

A: 24
B: 32
L: 7 11/16
M: 21 1/16
P: 8 3/4

