




TASK & AMBIENT LIGHTING

Provides forward-facing light for tasks at the mirror and wall-glow to light the surrounding space.



PRODUCT SPECIFICATIONS

- Natural LED lighting, mirroring daylight
- 90+ CRI
- 3,000 Kelvin color temperature
- Lumens per foot: 609 lm/ft
- Maximum lumens per watt efficacy: 93 lm avg.
- Matte black powder-coated frame finish
- Frame Dimensions: .75" W x 1.75" D
- Mirror Etch: 1.5" frosted outer edge
- Fingertip protection
- Security latch
- Calculated L70 50,000-hour LED lifespan
- Lumen output: 7257-10160 lm*
- Est. power consumption: 78-109 watts*

*Changes based on mirror size

PRODUCT DESCRIPTION

Introducing the Escher Lighted Mirror from the new Séura Artisan Collection - a bold fixture designed to introduce style and function to the bathroom. Its unique globe shape paired with both task and ambient lighting creates a stunning wall glow while providing excellent illumination for grooming. The matte black metal frame offers a sharp modern architectural accent.

FEATURES & BENEFITS

- Lead-free, copper-free, corrosion-resistant 5mm silver glass mirror
- True daylight LED lighting
- Calibrated light by space & design
- Contemporary design, sleek profile
- Suitable for damp bathroom environments
- Environmentally Sustainable
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-Year limited warranty
- Designed in US, manufactured globally

AVAILABLE OPTIONS

Option compatibility varies by size and technology.

- Custom mirror shapes and cutouts
- Custom etching design
- Frame finish* (steel, stainless steel, aluminum, wood, composite)
- Custom color temperature
- Dimmable lighting
- Touch control (i.e. touch control dimming, defogger, and/or color temperature)
- Night light
- Digital clock (IR control)
- UL electrical plug

*Color matching available

POPULAR FRAME FINISHES



INSTALLATION SPECIFICATIONS*

- 120V or 240V hardwire electrical connection, junction box not required
- Wall mount and hardware included for mounting to wall studs or drywall
- Control by on/off wall switch
- Dimming options compatible with 0-10V, TRIAC, Forward Phase, Reverse Phase, and ELV (Electronic Low Voltage)
- Fixture can only be mounted in the WxH orientation, not field-interchangeable

*Installation wiring may be different on mirrors equipped with additional options.


SAFETY & CERTIFICATIONS

- Meets UL/cUL standards
- Safety backing

LEAD TIMES

Lead time starts after approved shop drawings and frame finish swatch. Subject to change. Additional time required during holidays and factory closures.

- Production and quality Inspections = 8-12 weeks
- Transit time, including shipment booking, handling time, customs = 6-10 weeks

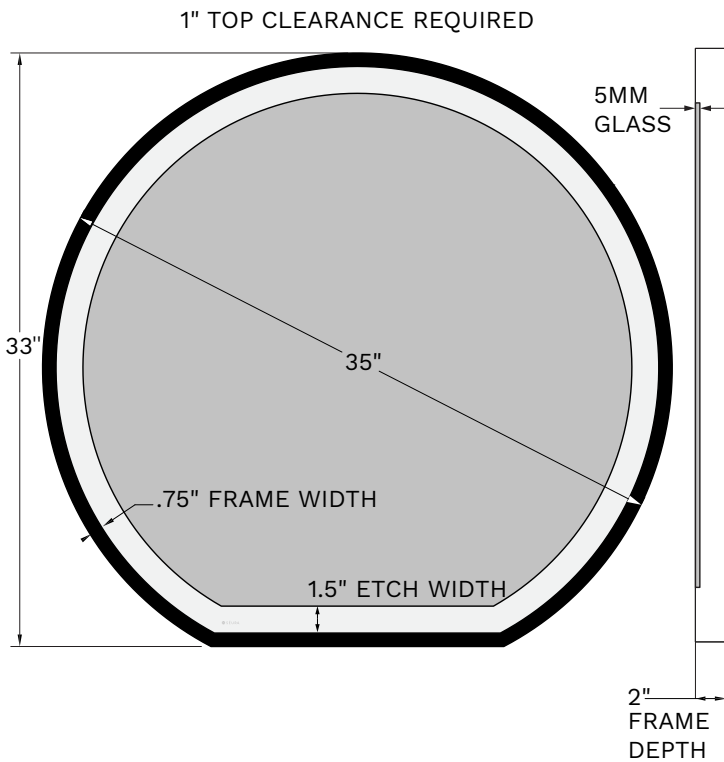

STANDARD SIZES

Item Number	Dimensions	Power requirements/ estimated consumption
ILM-ARES-35X33-CU-FR	35" x 33" x 2"	120/240 VAC/78W
ILM-ARES-42X39-CU-FR	42" x 39" x 2"	120/240 VAC/94W
ILM-ARES-49X46-CU-FR	49" x 46" x 2"	120/240 VAC/109W

Base sizes depicted. Custom options available, contact commercialsupport@seura.com
Minimum order size applies to all orders

THE SÉURA DIFFERENCE



Trusted by over 100
hospitality brands



Global technology
leader for 20+ years



Industry-leading
customer service



Dual domestic and
imported products
under a single brand



Woman-owned
business