




TASK LIGHTING

Delivers bright, direct light for tasks at the mirror.



PRODUCT SPECIFICATIONS

- Natural LED lighting, mirroring daylight
- 90+ CRI
- 3,000 Kelvin color temperature
- Lumens per foot: 609 lm/ft
- Maximum lumens per watt efficacy: 99 lm
- Brushed bronze plated frame finish
- Frame dimensions: 1" W x 3" D
- Mirror Etch: 3" frosted left and right sides
- Fingertip protection
- Security latch
- Calculated L70 50,000-hour LED lifespan
- Lumen output: 4754 lm
- Est. power consumption: 48 watts

PRODUCT DESCRIPTION

Introducing the Hopper Lighted Mirror from the new Séura Artisan Collection - a stunning fixture designed to capture the perfect reflection. With exceptional natural illumination, impeccable craftsmanship, and a beautiful bronze metal frame and shelf, this mirror will surround the guest in light and elevate the experience.

FEATURES & BENEFITS

- lead-free, copper-free, corrosion-resistant 5mm silver glass mirror
- True daylight LED lighting
- Calibrated light by space & design
- Contemporary design, sleek profile
- Suitable for damp bathroom environments
- Environmentally sustainable
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-Year limited warranty
- Designed in US, manufactured globally



AVAILABLE OPTIONS

Option compatibility varies by size and technology.

- Custom mirror shapes and cutouts
- Custom etching design
- Frame finish* (steel, stainless steel, aluminum, wood, composite)
- Custom color temperature
- Dimmable lighting
- Touch control (i.e. touch control dimming, defogger, and/or color temperature)
- Night light
- Digital clock (IR control)
- UL electrical plug

*Color matching available

POPULAR FRAME FINISHES



INSTALLATION SPECIFICATIONS*

- 120V or 240V hardwire electrical connection, junction box not required
- Wall mount and hardware included for mounting to wall studs or drywall
- Control by on/off wall switch
- Dimming options compatible with 0-10V, TRIAC, Forward Phase, Reverse Phase, and ELV (Electronic Low Voltage)
- Fixture can only be mounted in the WxH orientation, not field-interchangeable

*Installation wiring may be different on mirrors equipped with additional options.


SAFETY & CERTIFICATIONS

- Meets UL/cUL standards
- Safety backing

LEAD TIMES

Lead time starts after approved shop drawings and frame finish swatch. Subject to change. Additional time required during holidays and factory closures.

- Production and quality inspections = 8-12 weeks
- Transit time, including shipment booking, handling time, customs = 6-10 weeks

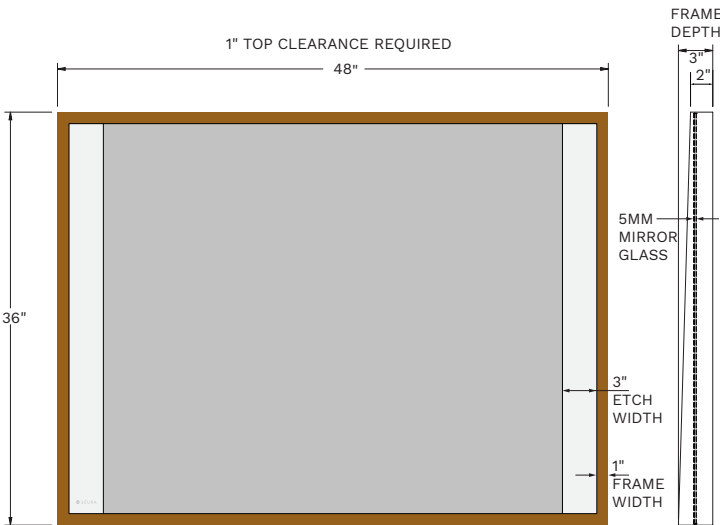

STANDARD SIZES

Item Number	Dimensions	Power requirements/ estimated consumption
ILM-ARHP-24X36-RE-FR	24" x 36" x 3"	120/240 VAC/48W
ILM-ARHP-36X36-RE-FR	36" x 36" x 3"	120/240 VAC/48W
ILM-ARHP-48X36-RE-FR	48" x 36" x 3"	120/240 VAC/48W
ILM-ARHP-60X36-RE-FR	60" x 36" x 3"	120/240 VAC/48W

Base sizes depicted. Custom options available, contact commercialsupport@seura.com
Minimum order size applies to all orders

THE SÉURA DIFFERENCE



Trusted by over 100
hospitality brands



Global technology
leader for 20+ years



Industry-leading
customer service



Dual domestic and
imported products
under a single brand



Woman-owned
business