




**TASK LIGHTING**

Delivers bright, direct light for tasks at the mirror.



**PRODUCT SPECIFICATIONS**

- Natural LED lighting, mirroring daylight
- 90+ CRI
- 3,000 Kelvin color temperature
- Lumens per foot: 518 lm/ft
- Maximum lumens per watt efficacy: 96 lm avg.
- Matte black powder-coated frame finish
- Frame Dimensions: .5" W x 1.75" D
- Mirror Etch: 1" Frosted inner ring
- Fingertip protection
- Security latch
- Calculated L70 50,000-hour LED lifespan
- Lumen output: 3457-4872 lm\*
- Est. power consumption: 36-50 watts\*  
\*Changes based on mirror size

**PRODUCT DESCRIPTION**

Introducing the Raphael Lighted Mirror from the new Séura Artisan Collection – a perfect blend of classic design and modern function. Set within a thin black metal frame, the arched profile adds a bold architectural element while creating the illusion of dimension and space. With an integrated arch of LED task-lighting, this mirror brings a better reflection and grooming experience to the bathroom vanity.

**FEATURES & BENEFITS**

- Lead-free, copper-free, corrosion-resistant 5mm silver glass mirror
- True daylight LED lighting
- Calibrated light by space & design
- Contemporary design, sleek profile
- Suitable for damp bathroom environments
- Environmentally sustainable
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-Year limited warranty
- Designed in US, manufactured globally


**AVAILABLE OPTIONS\***

Option compatibility varies by size and technology.

- Custom mirror shapes and cutouts
- Custom etching design
- Frame finish† (steel, stainless steel, aluminum, wood, composite)
- Custom color temperature
- Dimmable lighting
- Touch control (i.e. touch control dimming, defogger, and/or color temperature)
- Night light
- UL electrical plug

†Color matching available

**POPULAR FRAME FINISHES\***



\* Custom options are exclusively available for high-volume commercial projects.

## INSTALLATION SPECIFICATIONS\*

- 120V or 240V hardwire electrical connection, junction box not required
- Wall mount and hardware included for mounting to wall studs or drywall
- Control by on/off wall switch
- 0-10V Dimming
- Fixture can only be mounted in the WxH orientation, not field-interchangeable

\*Installation wiring may be different on mirrors equipped with additional options.


## SAFETY & CERTIFICATIONS

- Meets UL/cUL standards
- Safety backing

## LEAD TIMES

Lead time starts after approved shop drawings and frame finish swatch. Subject to change. Additional time required during holidays and factory closures.

- Production and quality inspections = 8-12 weeks
- Transit time, including shipment booking, handling time, customs = 6-10 weeks
- Single-quantity sizes lead time = 3 business days

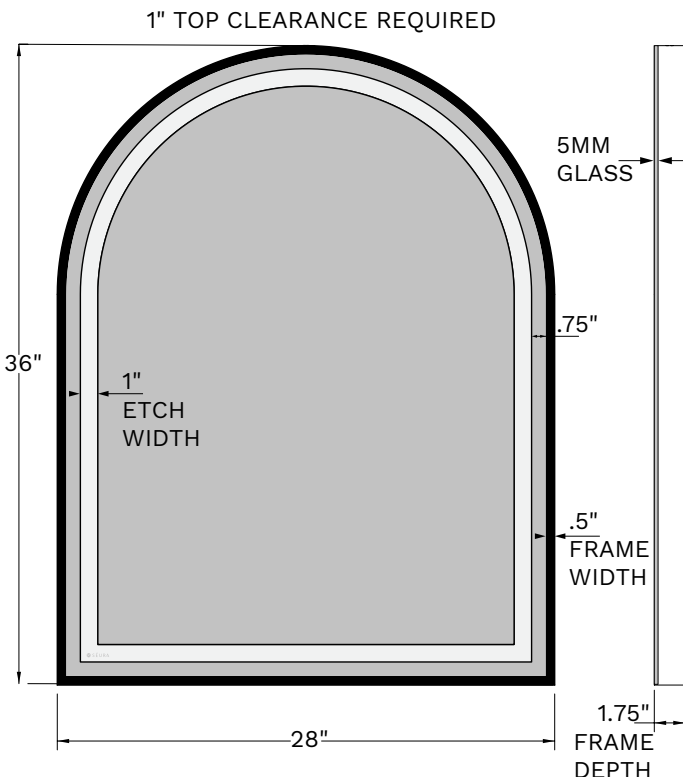

## STANDARD SIZES

Item number	Dimensions	Power requirements/ estimated consumption
ILM-ARRA-24X36-AR-FR	24" x 36" x 1.75"	120/240 VAC/36W
ILM-ARRA-28X36-AR-FR†	28" x 36" x 1.75"	120/240 VAC/39W
ILM-ARRA-42X36-AR-FR	42" x 36" x 1.75"	120/240 VAC/50W

Base sizes depicted. Custom options available, contact [commercialsupport@seura.com](mailto:commercialsupport@seura.com)

THE SÉURA  
DIFFERENCE



Trusted by over 100  
hospitality brands



Global technology  
leader for 20+ years



Industry-leading  
customer service



Dual domestic and  
imported products  
under a single brand



Woman-owned  
business