




## TASK LIGHTING

Delivers bright, direct light for tasks at the mirror.



## PRODUCT SPECIFICATIONS

- Natural LED lighting, mirroring daylight
- 90+ CRI
- 3,000 Kelvin color temperature
- Lumens per foot: 518 lm/ft
- Maximum lumens per watt efficacy: 96 lm avg.
- Matte black powder-coated frame finish
- Frame Dimensions: .5" W x 1.75" D
- Mirror Etch: 1" Frosted inner ring
- Fingertip protection
- Security latch
- Calculated L70 50,000-hour LED lifespan
- Lumen output: 3457-4872 lm\*
- Est. power consumption: 36-50 watts\*  
\*Changes based on mirror size

## PRODUCT DESCRIPTION

Introducing the Raphael Lighted Mirror from the new Séura Artisan Collection – a perfect blend of classic design and modern function. Set within a thin black metal frame, the arched profile adds a bold architectural element while creating the illusion of dimension and space. With an integrated arch of LED task-lighting, this mirror brings a better reflection and grooming experience to the bathroom vanity.

## FEATURES & BENEFITS

- Lead-free, copper-free, corrosion-resistant 5mm silver glass mirror
- True daylight LED lighting
- Calibrated light by space & design
- Contemporary design, sleek profile
- Suitable for damp bathroom environments
- Environmentally sustainable
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-Year limited warranty
- Designed in US, manufactured globally


## AVAILABLE OPTIONS

Option compatibility varies by size and technology.

- Custom mirror shapes and cutouts
- Custom etching design
- Frame finish\* (steel, stainless steel, aluminum, wood, composite)
- Custom color temperature
- Dimmable lighting
- Touch control (i.e. touch control dimming, defogger, and/or color temperature)
- Night light
- Digital clock (IR control)
- UL electrical plug

\*Color matching available

## POPULAR FRAME FINISHES



## INSTALLATION SPECIFICATIONS\*

- 120V or 240V hardwire electrical connection, junction box not required
- Wall mount and hardware included for mounting to wall studs or drywall
- Control by on/off wall switch
- Dimming options compatible with 0-10V, TRIAC, Forward Phase, Reverse Phase, and ELV (Electronic Low Voltage)
- Fixture can only be mounted in the WxH orientation, not field-interchangeable

\*Installation wiring may be different on mirrors equipped with additional options.


## SAFETY & CERTIFICATIONS

- Meets UL/cUL standards
- Safety backing

## LEAD TIMES

Lead time starts after approved shop drawings and frame finish swatch. Subject to change. Additional time required during holidays and factory closures.

- Production and quality inspections = 8-12 weeks
- Transit time, including shipment booking, handling time, customs = 6-10 weeks

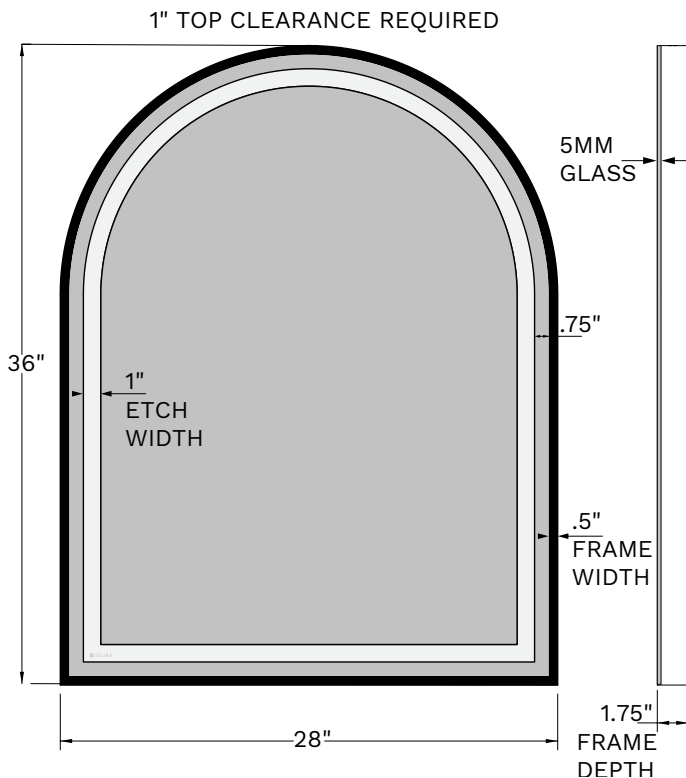

## STANDARD SIZES

| Item number          | Dimensions        | Power requirements/<br>estimated consumption |
|----------------------|-------------------|--|
| ILM-ARRA-24X36-AR-FR | 24" x 36" x 1.75" | 120/240 VAC/36W                              |
| ILM-ARRA-28X36-AR-FR | 28" x 36" x 1.75" | 120/240 VAC/39W                              |
| ILM-ARRA-42X36-AR-FR | 42" x 36" x 1.75" | 120/240 VAC/50W                              |

Base sizes depicted. Custom options available, contact [commercialsupport@seura.com](mailto:commercialsupport@seura.com)  
Minimum order size applies to all orders

THE SÉURA  
DIFFERENCE



Trusted by over 100  
hospitality brands



Global technology  
leader for 20+ years



Industry-leading  
customer service



Dual domestic and  
imported products  
under a single brand



Woman-owned  
business