
HOPPER LIGHTED MIRRORS ARTISAN COLLECTION™

PRODUCT SPECIFICATIONS



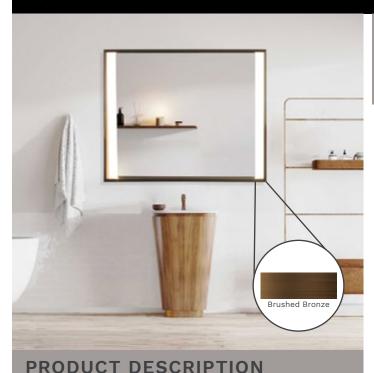

Introducing the Hopper Lighted Mirror from the new Séura

Artisan Collection - a stunning fixture designed to capture

the perfect reflection. With exceptional natural illumination, impeccable craftsmanship, and a beautiful bronze metal frame and shelf, this mirror will surround the guest in light and

TASK LIGHTING

Delivers bright, direct light for tasks at the mirror.



PRODUCT SPECIFICATIONS

- · Natural LED lighting, mirroring daylight
- 90+ CRI
- 3,000 Kelvin color temperature
- Lumens per foot: 609 lm/ft
- Maximum lumens per watt efficacy: 99 lm
- · Brushed bronze plated frame finish
- Frame dimensions: 1" W x 3" D
- Mirror Etch: 3" frosted left and right sides
- Fingerprint protection
- · Security latch
- Calculated L70 50,000-hour LED lifespan
- · Lumen output: 4754 lm, varies by mirror size
- Est. power consumption: 48 watts, varies by mirror size

FEATURES & BENEFITS

- Lead-free, copper-free, corrosion-resistant 5mm silver glass mirror
- True daylight LED lighting

elevate the experience.


- Calibrated light by space & design
- · Contemporary design, sleek profile
- · Suitable for damp bathroom environments
- Environmentally sustainable
- · Energy efficient
- · Easy installation
- Title 24 compliance available
- · 3-Year limited warranty
- · Designed in US, manufactured globally

AVAILABLE OPTIONS*

Option compatibility varies by size and technology.

- · Custom mirror shapes
- · Custom etching design
- Frame finish (steel, stainless steel, aluminum, wood, composite), color matching available
- Custom color temperature
- · Dimmable lighting
- Touch control (i.e. touch control dimming, defogger, and/or color temperature)
- Night light
- UL electrical plug

POPULAR FRAME FINISHES* Matte Black Polished Silver Classic Brass Antique Gold Brushed Black Brushed Nickel Champagne Gold Brushed Bronze

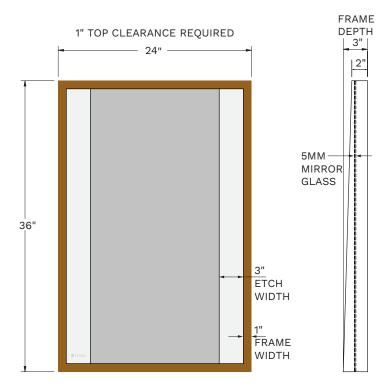

INSTALLATION SPECIFICATIONS

Installation wiring may be different on mirrors equipped with additional options.

- 120V or 240V hardwire electrical connection, junction box not required
- Wall mount and hardware included for mounting to wall studs or drywall
- · Control by on/off wall switch
- 0-10V Dimming
- Fixture can only be mounted in the WxH orientation, not field-interchangeable

SAFETY & CERTIFICATIONS

- · Meets UL/cUL standards
- · Safety backing

LEAD TIMES

- Lead time starts after approved shop drawings and frame finish swatch. Subject to change. Additional time required during holidays and factory closures.
- Production and quality inspections = 8-12 weeks
- Transit time, including shipment booking, handling time, customs = 6-10 weeks
- Single-quantity sizes lead time = 3 business days







STANDARD SIZES

	Item number	Dimensions	Power Requirements/ Estimated Consumption
AVAILABLE IN QTY 1	ILM-ARHP-24X36-RE-FR	24" x 36" x 3"	120/240 VAC/48W
	ILM-ARHP-36X36-RE-FR	36" x 36" x 3"	120/240 VAC/48W
	ILM-ARHP-48X36-RE-FR	48" x 36" x 3"	120/240 VAC/48W
	ILM-ARHP-60X36-RE-FR	60" x 36" x 3"	120/240 VAC/48W

Base sizes depicted. Custom options available, contact commercialsupport@seura.com



