




PRODUCT DESCRIPTION

Introducing the Riley Lighted Mirror from the new Séura Artisan Collection – bringing bright light and clean lines to the bathroom vanity. With sleek rounded corners and a stylish black matte metal frame, this mirror will bring a modern touch to the bathroom design while offering best-in-class task lighting for guests.

TASK LIGHTING

Delivers bright, direct light for tasks at the mirror.



PRODUCT SPECIFICATIONS

- Natural LED lighting, mirroring daylight
- 90+ CRI
- 3,000 Kelvin color temperature
- Lumens per foot: 518 lm/ft
- Maximum lumens per watt efficacy: 96 lm avg.
- Matte black powder-coated frame finish
- Frame dimensions: .75" W x 2.5" D
- Mirror etch: 1" frosted inner ring
- Fingerprint protection
- Security latch
- Calculated L70 50,000-hour LED lifespan
- Lumen output: 4400-6287 lm, varies by mirror size
- Est. power consumption: 46-65 watts, varies by mirror size

FEATURES & BENEFITS


- Lead-free, copper-free, corrosion-resistant 5mm silver glass mirror
- True daylight LED lighting
- Calibrated light by space & design
- Contemporary design, sleek profile
- Suitable for damp bathroom environments
- Environmentally sustainable
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-Year limited warranty
- Designed in US, manufactured globally

AVAILABLE OPTIONS*


Option compatibility varies by size and technology.

- Custom mirror shapes
- Custom etching design
- Frame finish (steel, stainless steel, aluminum, wood, composite), color matching available
- Custom color temperature
- Dimmable lighting
- Touch control (i.e. touch control dimming, defogger, and/or color temperature)
- Night light
- UL electrical plug

POPULAR FRAME FINISHES*



* Custom options are exclusively available for high-volume commercial projects.

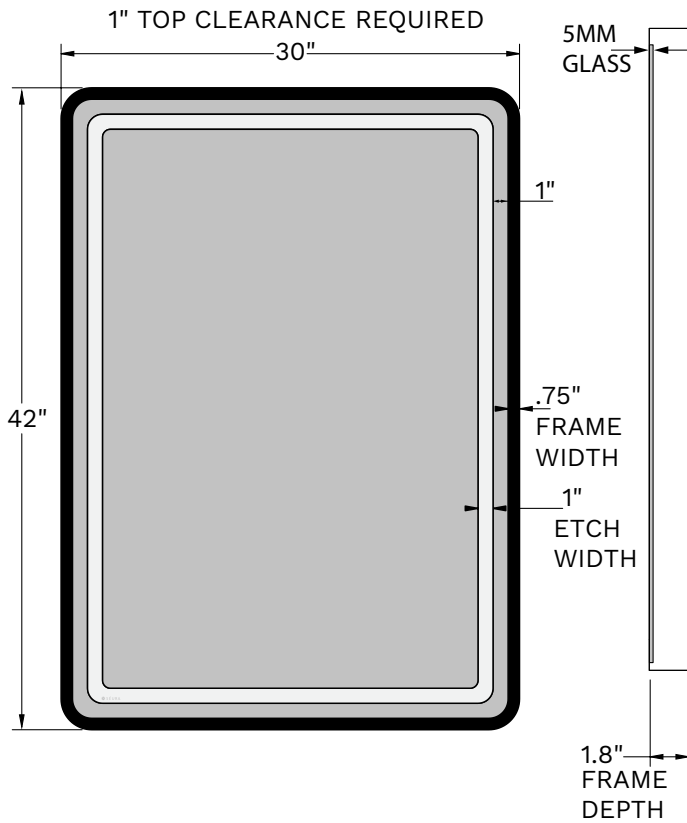

INSTALLATION SPECIFICATIONS

Installation wiring may be different on mirrors equipped with additional options.

- 120V or 240V hardwire electrical connection, junction box not required
- Wall mount and hardware included for mounting to wall studs or drywall
- Control by on/off wall switch
- 0-10V Dimming
- Fixture can only be mounted in the WxH orientation, not field-interchangeable

SAFETY & CERTIFICATIONS

- Meets UL/cUL standards
- Safety backing

LEAD TIMES

- Lead time starts after approved shop drawings and frame finish swatch. Subject to change. Additional time required during holidays and factory closures.
- Production and quality inspections = 8-12 weeks
- Transit time, including shipment booking, handling time, customs = 6-10 weeks
- Single-quantity sizes lead time = 3 business days



STANDARD SIZES

Item number	Dimensions	Power Requirements/ Estimated Consumption
ILM-ARRL-30X42-RR-FR	30" x 42" x 1.8"	120/240 VAC/46W
ILM-ARRL-36X42-RR-FR	36" x 42" x 1.8"	120/240 VAC/50W
ILM-ARRL-48X36-RR-FR	48" x 36" x 1.8"	120/240 VAC/60W
ILM-ARRL-60X36-RR-FR	60" x 36" x 1.8"	120/240 VAC/65W

Base sizes depicted. Custom options available, contact commercialsupport@seura.com

THE SEURA DIFFERENCE



Trusted by over 100
hospitality brands



Global technology
leader for 20+ years



Industry-leading
customer service



Dual domestic and
imported products
under a single brand



Woman-owned
business



1230 Ontario Road Green Bay, Wisconsin 54311
1-800-957-3872 contacts@seura.com
www.seura.com

Publish date: July 2, 2024. Information is subject to change without notice.

© 2024 Séura