




TASK LIGHTING

Delivers bright, direct light for tasks at the mirror.



PRODUCT SPECIFICATIONS

- Natural LED lighting, mirroring daylight
- 90+ CRI
- 3,000 Kelvin color temperature
- Lumens per foot: 609 lm/ft
- Maximum lumens per watt efficacy: 92 lm
- Matte black powder-coated frame finish
- Frame dimensions: 1" W x 2" D
- Mirror etch: 2" frosted left and right sides
- Fingerprint protection
- Security latch
- Calculated L70 50,000-hour LED lifespan
- Lumen output: 3962 lm
- Est. power consumption: 43 watts

PRODUCT DESCRIPTION

Introducing the Rothko Lighted Mirror from the new Séura Artisan Collection – a masterpiece of modern design and unparalleled functionality. The unique double tier matte black metal frame is a play on stacked rectangles that adds dimension to the slender silhouette. The broad bars of light on either side of the mirror frame the guest and introduce a best-in-class grooming experience to the bathroom vanity.

FEATURES & BENEFITS


- Lead-free, copper-free, corrosion-resistant 5mm silver glass mirror
- True daylight LED lighting
- Calibrated light by space & design
- Contemporary design, sleek profile
- Suitable for damp bathroom environments
- Environmentally sustainable
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-Year limited warranty
- Designed in US, manufactured globally

AVAILABLE OPTIONS*


Option compatibility varies by size and technology.

- Custom mirror shapes
- Custom etching design
- Frame finish (steel, stainless steel, aluminum, wood, composite), color matching available
- Custom color temperature
- Dimmable lighting
- Touch control (i.e. touch control dimming, defogger, and/or color temperature)
- Night light
- UL electrical plug

POPULAR FRAME FINISHES*



* Custom options are exclusively available for high-volume commercial projects.

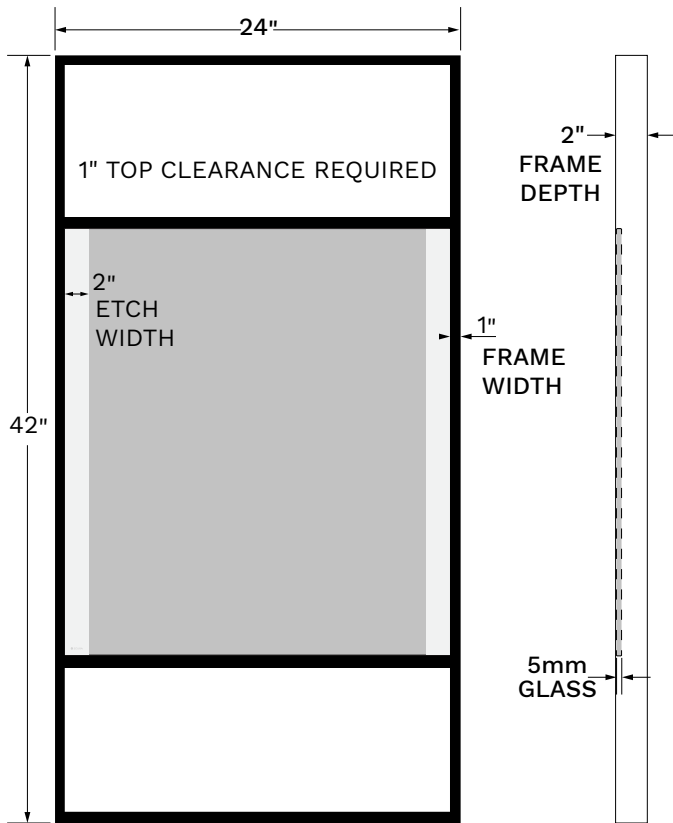

INSTALLATION SPECIFICATIONS

Installation wiring may be different on mirrors equipped with additional options.

- 120V or 240V hardwire electrical connection, junction box not required
- Wall mount and hardware included for mounting to wall studs or drywall
- Control by on/off wall switch
- 0-10V Dimming
- Fixture can only be mounted in the WxH orientation, not field-interchangeable


SAFETY & CERTIFICATIONS

- Meets UL/cUL standards
- Safety backing

LEAD TIMES

Lead time starts after approved shop drawings and frame finish swatch. Subject to change. Additional time required during holidays and factory closures.

- Production and quality Inspections = 8-12 weeks
- Transit time, including shipment booking, handling time, customs = 6-10 weeks
- Single-quantity sizes lead time = 3 business days

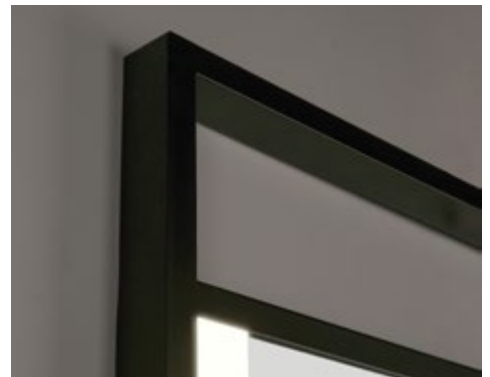

STANDARD SIZES

Item number	Dimensions	Power Requirements/ Estimated Consumption
AVAILABLE IN QTY 1 ILM-ARRK-24X42-RE-FR	24" x 42" x 2"	120/240 VAC/43W
ILM-ARRK-36X42-RE-FR	36" x 42" x 2"	120/240 VAC/43W
ILM-ARRK-48X42-RE-FR	48" x 42" x 2"	120/240 VAC/43W

Base sizes depicted. Custom options available, contact commercialsupport@seura.com

**THE SÉURA
DIFFERENCE**



Trusted by over 100
hospitality brands



Global technology
leader for 20+ years



Industry-leading
customer service



Dual domestic and
imported products
under a single brand



Woman-owned
business



1230 Ontario Road Green Bay, Wisconsin 54311
1-800-957-3872 contacts@seura.com
www.seura.com

Publish date: August 1, 2024. Information is subject to change without notice.

© 2024 Séura