


Model: PARADISE TINYBROKEN EDGE NEGRO

Codes: 100112570

Group: G-110

Format: 31X31X0,8CM

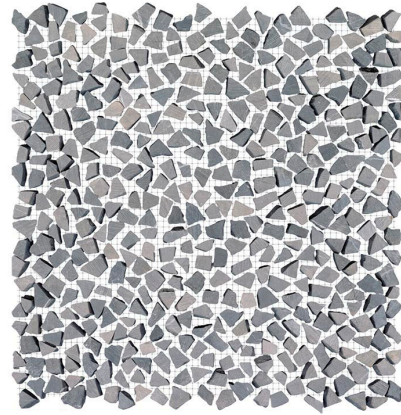











RECOMMENDATIONS

Recommended adhesive	100201526 ONE-FLEX PREMIUM BLANCO 25KG	
Recommended joint	100236449 COLORSTUK RAPID CEMENTO N 5KG	
Recommended joint (wet area)	100236449 COLORSTUK RAPID CEMENTO N 5KG	100086920 FILA FOB XTREME 1L
Recommended adhesive (wet area)	100201526 ONE-FLEX PREMIUM BLANCO 25KG	

TECHNICAL INFORMATION

Slip resistance (wet pendulum) irhd 55	CL 2 (38)	EN 16165 Anexo C*
Water absorption at atmospheric pressure	0.1-0.2%	UNE-EN 13755:2002*
Slip resistance (pendulum-dry)	78	
Flammability	Clase A1f I/Clase A1	UNE-EN 13501-1:2007+A1:2010*
Frost resistance	2.8 MPa	UNE-EN 12371:2011*
Resistance to abrasion	22 mm	UNE-EN 14157:2005*
Use	FLOOR TILES	
Flexural strength	3.4 MPa	UNE-EN 12372:2007*
Dynamic coefficient of friction (dcof)	0.51	ANSI 137.1*
Composition	BASALT	

FEATURES

-  Product manufactured on a mesh that makes installation easier.
-  Gloss-free
-  Material suitable for use on shower floors.
-  Material suitable for use on pool surroundings.
-  Material suitable for floors with substantial use (private setting in high-traffic rooms.)
-  Material suitable for use on outdoor floors.
-  Material suitable for use on indoor floors.
-  Material suitable for use on shower walls.
-  Material suitable for use on outdoor walls.
-  Material suitable for use on indoor walls.



PACKING

Sales units per square meter	10.405827 PIECES/M2	
Sales units per box	9 PIECES/BOX	
Sales units per unit	1 PIECES	
Sale unit	ST	
Base unit	ST	
Net weight	1.524 KG/PIECES	
Gross weight	1.592 KG/PIECES	

