

Mira Azora Dual

Thermostatic Electric Shower



Stylish design and dual outlet experience combined with safe thermostatic technology.

Product Information

| Description | Colour | Product No. |
|-----------------------|--------|-------------|
| Mira Azora Dual 9.8kW | White | 1.1634.156 |

Features & Benefits

Temperature control

Thermostatic temperature control

Easy to fit

Retrofits onto inlets of most electric showers

Left-hand water and cable entry points

Easy to service

Easy filter access

For your customer

Separate power and temperature controls

Push button on/off

Low power setting saves water and energy

Clearscale™ reduces limescale by up to 50%

Modern aesthetic with frosted glass fascia and chrome detailing

Easy to use Diverter allows for relaxing overhead shower or invigorating handshower

Easy clean showerheads both with rub clean nozzles

Easy clean smooth hoses



Product Specification

Tech Details

Temperature Control

Control type: Thermostatic SMA

Installation

Power options: 9.8kW 240V AC (9.0kW 230V AC)

Supply voltage: 230v \pm 10%

Supply rating: 45 amp (9.8kW)

Terminal Block connections: Maximum 16mm²

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15 mm brass, compression

Outlet connections: ½" BSP Male

Supply Conditions (hot and cold)

Minimum maintained pressure: 0.7 bar (10 metre head)

Maximum maintained pressure: 5.0 bar (50 metre head)

Maximum static pressure: 10.0 bar (100 metre head)

Performance

Temperature stability: Thermostatic \pm 2°C

Safety Features

Phased shutdown: Yes

Factory set to safe max temp: Yes, Factory set at 48°C

Mira Sensi-flo™: Yes

Accessories

Wide range of accessories available at www.mirashowers.co.uk

Approvals

BEAB approved


Kiwa certified

WRAS approved (Water Regulations Advisory Scheme)



Intertek

Dimensions

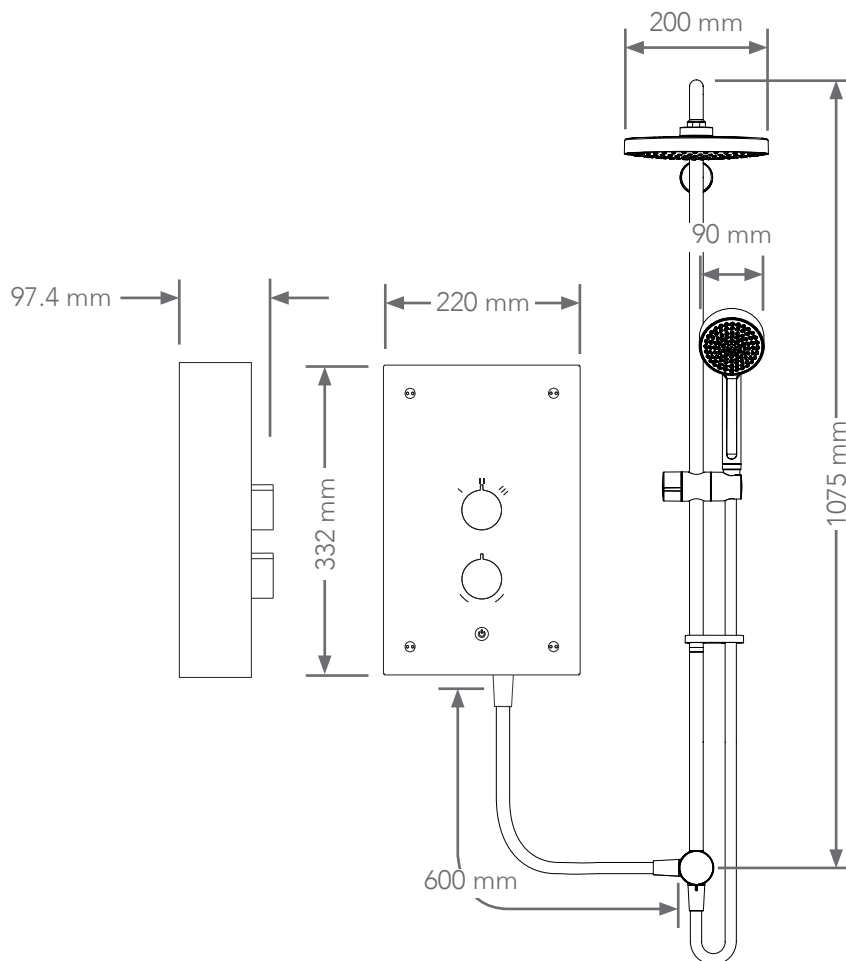

mira
SHOWERS