



Geberit Duofix element for wall-hung WC, 112 cm, with Alpha concealed cistern 12 cm, 6/3 litres, Alpha01 actuator plate

GEBERIT



APPLICATION PURPOSES

- For metal and wood frame walls
- For installation in part- or room-height prewalls
- For installation in room-height partition walls
- For floor constructions 0–20 cm
- For wall-hung WCs

CHARACTERISTICS

- 2025 range
- Statically self-supporting frame, protected against corrosion with powder coating
- Frame for wall-hung WCs with connection dimensions as per EN 33 and projection up to 62 cm
- Alternative fastening point for wall anchors
- Foot plates made of plastic
- Foot plate depth suitable for installation in U-profiles UW 50
- Galvanised leg supports protected against corrosion
- Connection bend can be mounted without tools
- Geberit Alpha concealed cistern 12 cm fully insulated against condensation

- For front actuation, suitable for dual flush
- Immediate post flush possible with factory setting
- Water supply connection on the rear or top centre
- Protection box for service opening, can be cut to length, protects against moisture and dirt
- With conduit pipe for feed pipe for Geberit AquaClean shower toilets and for connection cable
- Fastening option for electrical connection

TECHNICAL DATA

Flow pressure	0.1–10 bar
Operating temperature, water max.	25 °C
Flush volume, factory setting	5.8 / 3 l
Flush volume large, adjustment range	4 / 4.5 / 6 / 7.5 l
Flush volume small, adjustment range	2–4 l
Button shape	round
Product material	Steel

SCOPE OF DELIVERY

- Water supply connection unit R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and adapter ring
- Protection box for service opening
- 2 wall anchors
- 2 fixing brackets
- Geberit Alpha01 flush plate for dual flush, round
- Connection set for WC, ø 90 mm
- Connection bend 90° made of PE-HD, ø 90 mm
- Adaptor socket made of PE-HD, ø 90 / 110 mm
- Fastening and protection material

ACCESSORIES

- Geberit Duofix system fastening bracket
- Geberit Duofix fastening material for stud clearance 50–57.5 cm
- Geberit Duofix set of foot fastener on rear wall
- Geberit set of support brackets for WC ceramic appliances with small contact surfaces
- Geberit sound insulation set for wall-hung WC
- Geberit Duofix set of foot extensions 20 cm length


<i>Art.no.</i>	<i>Colour / surface</i>	<i>B cm</i>	<i>H cm</i>	<i>T cm</i>
458.041.21.2	chrom / glossy New	50	112	12

New article available from 01.05.2025

Geberit Selnova wall-hung WC, Premium, washdown, shrouded, Rimfree



Example image

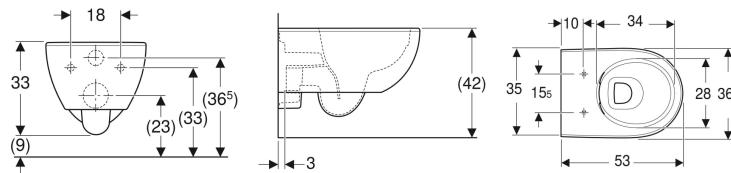

Application purposes

- For concealed cisterns
- For pressure flushing valves

Characteristics

- Wall-hung
- Washdown WC

- Rimfree
- Easy fastening with Geberit WC wall fixing type EFF3
- Type 1, full flush volume 6 / 5 / 4 l, in accordance with EN 997
- Flushes with 4.5 l
- Shrouded

Technical data

Product material

Vitreous china

Scope of delivery


- WC ceramic appliance
- Fastening material

To order additionally

- WC seat

Art. no.	Colour / surface	B	H	T	
502.293.00.7	white	36 cm	33 cm	53 cm	New

Geberit Selnova WC seat, fastening from above

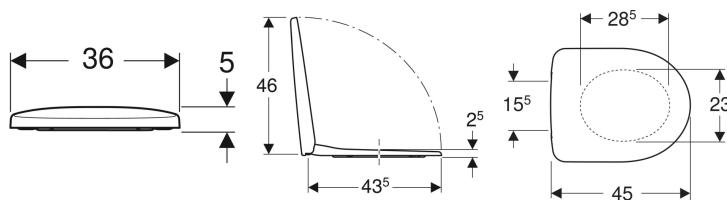

Example image

Characteristics

- Overlapping WC lid
- Hinges made of metal

Technical data

Product material	Duroplast
Fastening distance	15.5 cm

Scope of delivery

- WC seat

Art. no.	Colour / surface	Quick-release hinges	Soft-closing mechanism	Fastening	Hinge material
500.333.01.1	white / glossy	no	yes	from above	Brass chrome-plated
500.337.01.1	white / glossy	no	no	from above	Stainless steel
500.335.01.1	white / glossy	yes	yes	from above	Brass chrome-plated