


Model: PERF.DURANGO ACERO 1,5X59,6(A)

Codes: 100274438

Water absorption: BIII - Cladding Tile (10.0% < wa <= 20.0%)

Finish: Glazed / Standard

Rectified: Yes

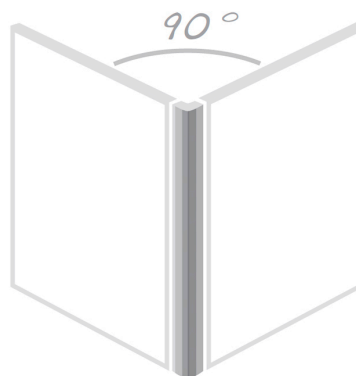


DIMENSIONAL FEATURES

 UNE-EN ISO 10545-2


Thickness	10.3 mm	+/-5%*
Width	15 mm	
Length	596 mm	
Length and width deviation	Below 0.15%	+/-0.3%*
Side straightness deviation	Below 0.15%	+/-0.3%*
Squareness deviation	Below 0.15%	+/-0.3%*
Surface flatness deviation	Below 0.15%	+/-0.4%*

*ISO-13006:2018 UNE-EN 14411:2016

FEATURES

 Natural-looking, non-glossy surface finish.

 Name given to the finish of those tiles dimensionally improved after the firing process.

 Wall installation

MECHANICAL FEATURES

 UNE-EN ISO 10545-4-6-7-9-11

Crazing resistance PASS

*ISO-13006:2018 UNE-EN 14411:2016

HYGIENIC FEATURES

 UNE-EN ISO 10545-13-14

Chemical resistance Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases B Min.*

Stain resistance Class 5. Easy cleaning with water 3 Min.*

*ISO-13006:2018 UNE-EN 14411:2016

PACKING

Sales units per box	15 PIECES/BOX	
Sales units per pallet	420 PIECES/PAL	
Sales units per unit	1 PIECES	

SCOPE OF USE

Technical code-1	1 - Use on walls	
------------------	------------------	--

System Certification



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double gluing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.