

Omnicare Design

Thermostatic Electric Shower

Product Codes

Omnicare Design 8.5kW with Extended Kit	TEOMND81
Omnicare Design 9.5kW with Extended Kit	TEOMND91
Omnicare Design 8.5kW with Grab Kit	TEOMNDG81
Omnicare Design 9.5kW with Grab Kit	TEOMNDG91

Installation

- Multiple pipe and cable entry points, a generous footprint and a fixing hole kit, the Omnicare Design is designed with ease of replacement in mind
- Suitable for connection with an analogue waste pump

Commissioning

- Simple 2 minute commissioning process

End User

- Large soft press start/stop button
- Power on illumination along with audible feedback allows ease of use for all users
- Tactile temperature dial with soft grey tones offers helpful visual contrast
- Looped lever handle with low resistance operation
- SafeSet™ limits the maximum water temperature to 43°C, in line with guidance from our consultants in the OT Service. The unit can alternatively be configured to 41°C, meeting the BEAB Care Standard or a higher maximum temperature
- Tri-Care™ technology keeps the water temperature within +/- 1°C complying with BEAB care approval
- Set the duration of the shower ranging from 5 minutes to 30 minutes
- Omnicare Design with Extended Kit - assists showering whether standing or seated, featuring an extended riser rail with a 2m anti-twist hose, or an optional dual - purpose Grab Riser Rail Kit - designed to withstand up to 150kg support load, also with a 2m anti-twist hose
- Easy clean 5 spray pattern shower head, with removable faceplate
- Single hand operated handset holder with easy push system



Omnicare Design
with Extended Kit



Omnicare Design
with Grab Kit



SAFETY CRITICAL
TRITON ACCESSORY


TRITON

Product Technical Sheet

Omnicare Design

Thermostatic Electric Shower

Shower	
Temperature stability	Thermostatic +/-1°C with Tri-Therm™
Power ratings	8.5kW & 9.5kW (at 240V)
Finish	White
Adjustable max temperature	41°C, 43°C or Max
Timed auto shutdown	5, 10, 20 or 30 mins (default 20 mins)
Start/stop type	Electronic soft press button
	Start/stop button & temperature control dial
Audible feedback	Start/stop and timer end confirmation
Visual indicators	Power-on/timer/low flow illumination
Water connection	15mm swivel inlet (up/down)
Terminal block	16mm max cable
Waste pump connection(s)	Analogue
Water supply	Mains cold water
Water pressure min	Minimum maintained pressure: 0.5 bar Minimum maintained pressure for BEAB Care: 1.0 bar
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)
Other installation aid(s)	Wall mounting template

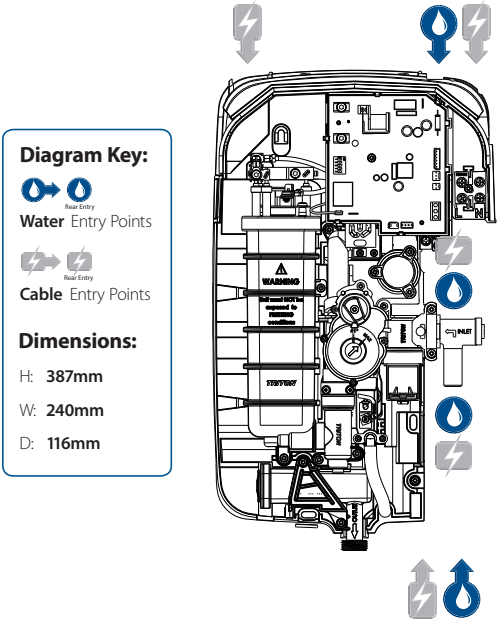

Riser Rail Kit	
Extended Kit Option	
Length	940mm
Diameter	25mm
Material	Stainless Steel
Finish	Polished
Hose	2m Anti-twist Chrome
Grab Kit Option	
Length	940mm
Material	Stainless Steel
Finish	Polished
Support load (max)	150kg
Fixing brackets	5 fixing points / 70mm diameter
Hose	2m Anti-twist Chrome

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Omnicare unit will aid optimum performance and keep the unit within the allocated guarantee period

