

Mira Coda Pro EV

Mixer Shower



SUITABLE FOR ALL SYSTEMS



5 YEAR GUARANTEE

The Mira Coda Pro EV is designed to make a quick impact. With its easy installation and safety features, it's the smart choice for professionals and consumers alike.

Product Information

Description	Colour	Product No.
Mira Coda Pro EV	Chrome	1.1836.005
Mira Coda Pro EV Valve Only	Chrome	1.1836.007

Features & Benefits

Temperature control
Thermostatic temperature stability
Easy to fit
Fast-fix kit for easy installation
Adjustable slide bar covers over previous fittings
Pipe spacer guide included to aid pipework installation during first fix
Front of tile installation system allows connection to pipework during second phase fix after tiling is complete
For your customer
Works on all systems, even at low pressure
Separate flow and temperature controls
Maximum temperature stop for increased safety (with override for a hotter shower)
Ceramic flow control ensures smooth reliable operation throughout the life of your product
Mira Cool Shield™ to ensure valve doesn't get hot during showering
Mira Magni-flo™ technology delivers up to 3x more flow, even at low pressure
One spray 9cm showerhead with rub-clean nozzles
1.25m flexible shower hose



Product Specification

Tech Details

Temperature and flow control

Temperature control type: Thermostatic

Flow control type: Ceramic

Installation

Water entry points: Rear only (bar valve exposed pipework installation elbows available for rising or falling inlets) (1.1712.002)

Inlet connections: 15mm compression joints with pipes;
3/4" BSP connection to mixer shower

Outlet connections: 1/2" BSP Male

Reversed inlets supported: No = hot left, cold right only

Supply Conditions (hot and cold)

Cold water range: 1°C to 25°C

Hot water range: Min 55°C; 60°C - 65°C (recommended)

Minimum maintained pressure (gas water heater) :
1 bar (10 metre head)

Minimum maintained pressure (gravity system) : 0.1 bar (1 metre head)

Maximum maintained pressure: 5.0 bar (50 metre head)

Maximum static pressure: 10.0 bar (100 metre head)

Performance

Flow rate (at handset): 9 l/min at 0.5 bar

Temperature stability: $\pm 2^{\circ}\text{C}$

Safety Features

Automatic shutdown: Shutdown within 2 secs

Factory set to safe max temp

Adjustable maximum temperature for on-site conditions

Approvals


KIWA UK approved product

WRAS approved (Water Regulations Advisory Scheme)

TMV2 approved product



Dimensions

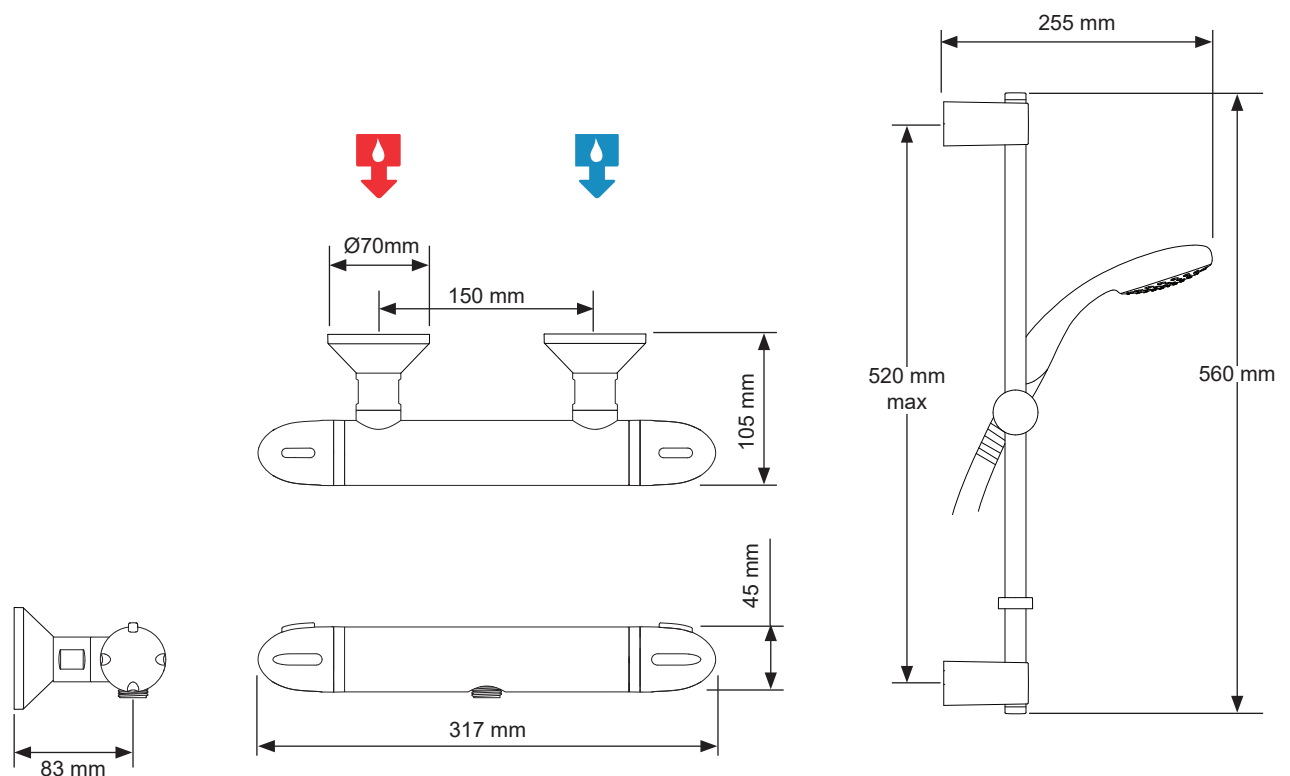

mira
SHOWERS