

Mira Mode High Pressure & Pumped

Single Outlet Digital Mixer

Smart, simple showering.



SUITABLE FOR ALL SYSTEMS



5 YEAR WARRANTY

Product Information

Description	Colour	Product No.
Mira Mode Rear Fed (High Pressure/Combi)	Chrome	1.1980.001
Mira Mode Rear Fed (Pumped for Gravity)	Chrome	1.1980.002
Mira Mode Ceiling Fed (High Pressure/Combi)	Chrome	1.1980.003
Mira Mode Ceiling Fed (Pumped for Gravity)	Chrome	1.1980.004

Features & Benefits

Temperature control
Thermostatic temperature stability with digital intelligence
Maximum temperature setting for increased safety
Easy to fit and maintain
Easy to install, single piece ceiling fed fittings assembly
Rear fed fittings option suitable for wall mounted installations
Push fit isolators
Long life filters
For your customer
Award winning Mira Switch 4 spray showerhead
Connected Mira app offers secondary control and remote operation
User adjustable temperature and flow pre-sets using the Mira app
Additional wireless remote control sold separately



Product Specification

Tech Details

Installation Units & Fittings

Water entry points - Back, Rear Fed; Top, Ceiling Fed

Inlet connections: 15mm push fit (supplied) or 15 mm compression

Data connection between digital valve and controller: Low voltage data cable

Digital Mixer

Inlet connections: 15mm push fit (supplied) or 15 mm compression

Outlet connection: 15mm push fit (supplied)

Data connection between digital valve and controller: Low voltage data cable

Supply voltage: 230v +10%

Supply rating: 3 amp fused plug

Supply Conditions (hot and cold)

Minimum maintained pressure: Pumped: 0.01 bar (10 cm head);
High Pressure: 0.5 bar (5 metre head)

Maximum maintained pressure: Pumped: 1.0 bar (10 metre head);
High Pressure: 5.0 bar (50 metre head)

Maximum static pressure: Pumped: 1.0 bar (10 metre head);
High Pressure: 10.0 bar (100 metre head)

Performance

Flow rate:

Default flow rate setting: 12 L/min (adjustable using the Mira app)

Minimum adjustable flow rate: 4 L/min (HP Product) or 6 L/min (Pumped Product)

The Digital Valve can deliver a maximum flow of 16 L/min at 1 bar (HP Product) or 12 L/min at 0.1 bar (Pumped Product).

The actual maximum flow will depend on the installation, system conditions and type of fittings. Refer to the 'Installation and User Guide' for more details.

Safety Features

Factory set to safe max temp: Factory set at 45°C

Approvals

WRAS approved (Water Regulations Advisory Scheme)


TMV2 approved

BEAB approved







Dimensions


High Pressure, Single Outlet

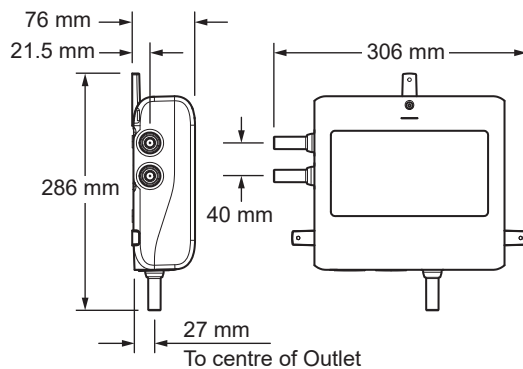

Pumped, Single Outlet

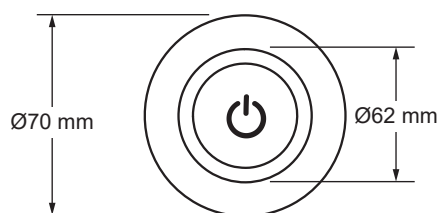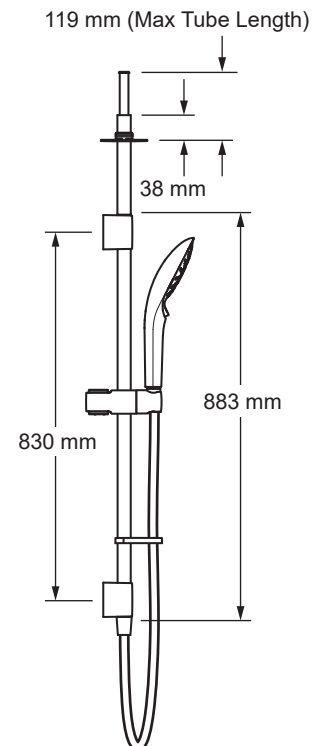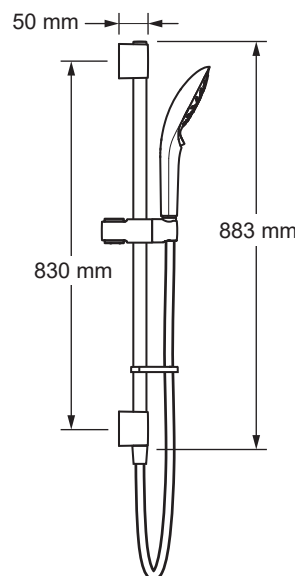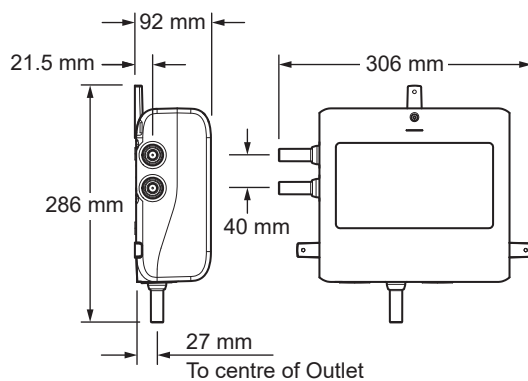

Shower Interface



mira
SHOWERS