

# Mira Minilite

## Mixer Shower Range



SUITABLE FOR ALL SYSTEMS



5 YEAR WARRANTY

This compact design helps save space in the bathroom. Perfectly suited to an en-suite.

### Product Information

Description	Colour	Product No.
Mira Minilite EV	Chrome	1.1869.001
Mira Minilite BIV	Chrome	1.1869.003
Mira Minilite BIR	Chrome	1.1869.004
Mira Minilite Exposed Valve Only	Chrome	1.1869.005
Mira Minilite B Valve Only	Chrome	1.1869.006

### Features & Benefits

#### Temperature control

Thermostatic temperature stability

#### Easy to fit

Quickly and easily fits onto reversed inlet supplies

#### Easy to service

Large, long-life filters and replaceable cartridge

#### For your customer

A single control for flow and temperature to help you fine tune your perfect shower

Maximum temperature stop – enhances safety (comfort override)

Single sequential temperature and flow control

Mira Magni-flo™ technology delivers up to 3x more flow, even at low pressure

Works on all systems and pressures, even at low pressure

Single spray 9cm showerhead with rub-clean nozzles (except BIR which has a large 200mm deluge showerhead)



Mira Minilite EV



Mira Minilite BIV



Mira Minilite BIR

# Product Specification

## Tech Details

### Temperature and flow control

Control type: Thermostatic

### Installation

Water entry points: Rising, falling or rear

Inlet connections: ½" BSP or 15mm Male Compression (EV & BIV),  
16 mm Male Compression (BIR)

Outlet connections: ½" BSP Male Flat Face (EV & BIV),  
15mm compression (BIR)

Reversed inlets supported: Yes

### Supply Conditions (hot and cold)

Cold water range: Up to 25°C

Hot water range: 60°C-65°C

Minimum maintained pressure: 0.1 bar (1 metre head)

Maximum maintained pressure: 5.0 bar (50 metre head)

Maximum static pressure: 10.0 bar (100 metre head)

### Performance

Flow rate (at handset): 10 l/min at 0.5 bar. Supplied with 12 l/min flow regulator (fitted), recommended for pressures greater than 0.5 bar. Optional 6 l/min flow regulator also supplied.

Temperature stability: ± 1°C

### Safety Features

Thermostatic shutdown: Shutdown within 2 secs

Factory set to safe max temp: 41°C

Adjustable maximum temperature for on-site conditions

### Accessories

Wide range of accessories available at [www.mirashowers.co.uk](http://www.mirashowers.co.uk)


### Approvals

Buildcert TMV2 Approved

WRAS approved (Water Regulations Advisory Scheme)



## Dimensions

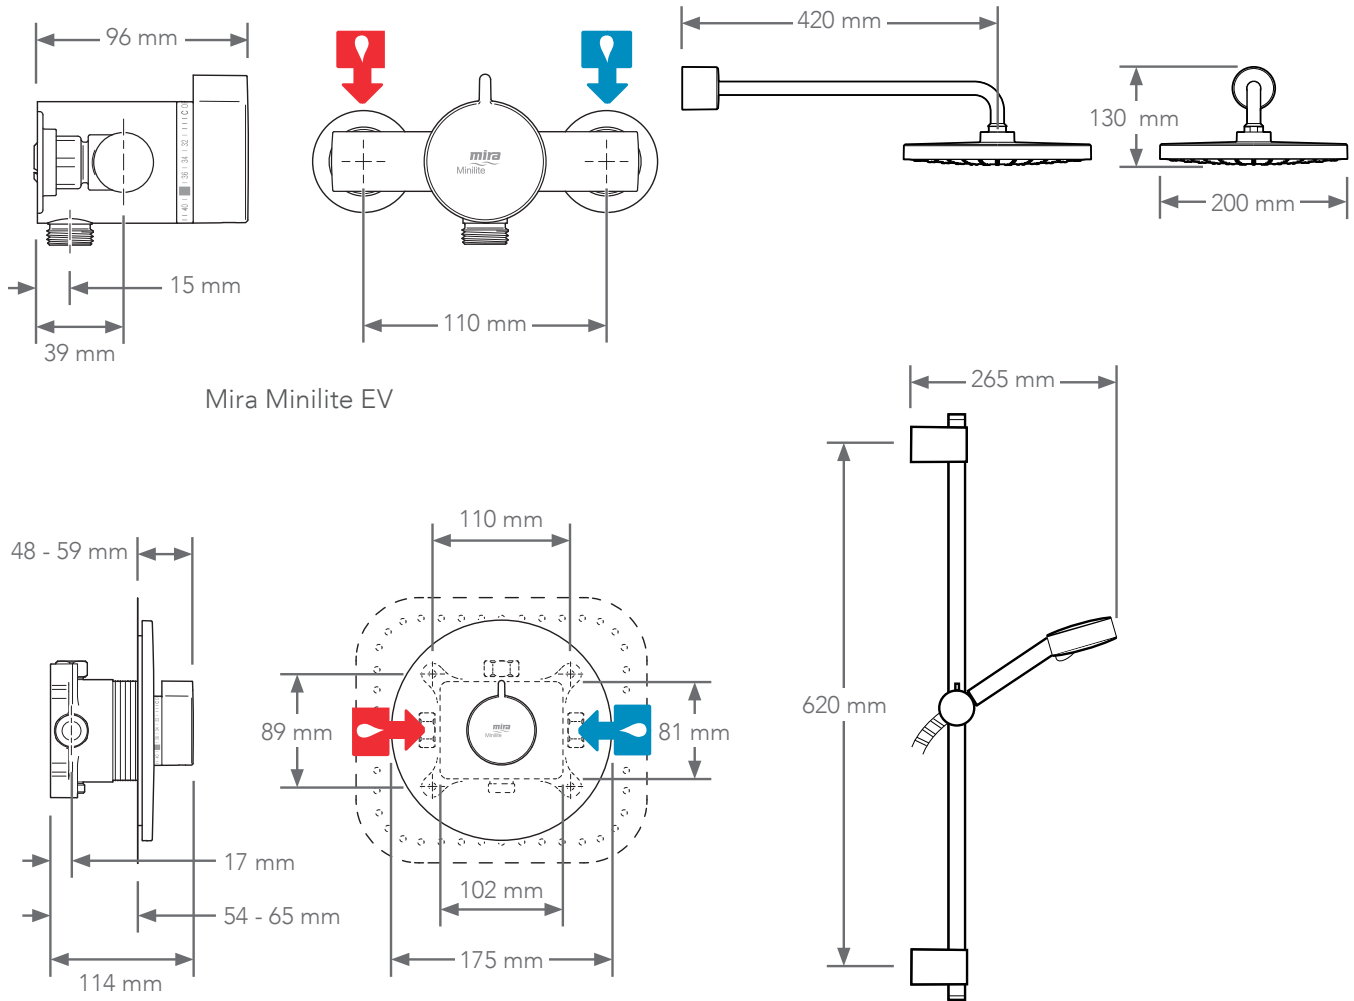

Mira Minilite EV

Mira Minilite BIV & BIR

