


Model: ATLANTA DARK

Codes: 100353400

Group: G-222

Format: 14,2X59,6X0,85CM

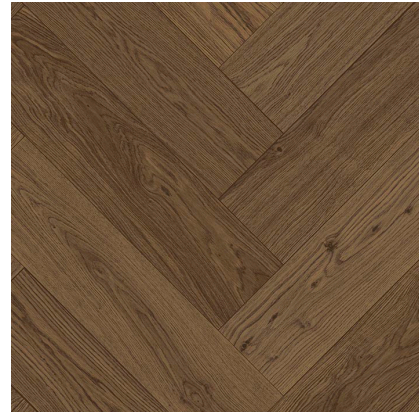




RECOMMENDATIONS

Recommended adhesive	100004241 FR-ONE BLANCO N 25KG
Recommended joint	100236481 COLORSTUK RAPID ANTRACITA N 5KG
Recommended joint (wet area)	100236481 COLORSTUK RAPID ANTRACITA N 5KG
Recommended adhesive (wet area)	100004241 FR-ONE BLANCO N 25KG

DIMENSIONAL FEATURES

Length and width deviation	±0.5%	UNE-EN ISO 10545-2*
Side straightness deviation	±0.5 %	UNE-EN ISO 10545-2*
Orthogonality deviation	±0.5%	UNE-EN ISO 10545-2*
Surface flatness deviation	±0.5 %	UNE-EN ISO 10545-2*

FEATURES

-  Gloss-free
-  Material suitable for use on shower walls.
-  Material suitable for use on outdoor walls.
-  Material suitable for use on indoor walls.
-  Material suitable for use on indoor floors.
-  Material recommended for installation on the floor.

PHYSICAL PROPERTIES

Water absorption	Bla	ISO 10545-3*
Breaking strength	613.2 N	>1300 N*
Resistance to thermal shock	PASS	ISO 10545-9*
Crack resistance	PASS	ISO 10545-11*
Flammability	A1f I/A1	EN 13501-1*
Flexural strength	>51 MPA	ISO 10545-4*
Slip resistance (wet pendulum) irhd 55	CL 1	EN 16165 Anexo C*
Slip resistance (pendulum-dry)	>40*	UNE EN 16165 Anexo C*
Dynamic coefficient of friction (dcof)	0.65 (T5C1K)	ANSI A326.3*
Abrasion resistance	2	EN ISO 10545-7*
Slip resistance (wet pendulum) (aus) irhd 55	P2	AS 4586*
Slip resistance (wet pendulum) (aus) irhd 96	P2	AS 4586*

CHEMICAL PROPERTIES

Stain resistance	CL 5	ISO 10545-14*
Resistance to chemicals	GA/GLA/GHA	ISO 10545-13*



PACKING

Sales units per box	1.100216 M2/BOX	
Sales units per pallet	55.010789 M2/PAL	
Sales units per unit	0.084632 M2/PIECE	
Sale unit	M2	
Base unit	ST	
Net weight	19.543439 KG/M2	
Gross weight	19.96881 KG/M2	

