

Dene Sequential

Thermostatic Mixer Shower

Product Codes

Dene Sequential Exposed Mixer Shower	UNDETHEXSQM
--------------------------------------	-------------

Installation

- 15mm push-fit (fixings to pipe) 3/4" flat face union (valve to fixings)
- 1/2" BSP bottom

End User

- Thermostatic temperature control - maintains consistent, comfortable showering temperature
- Single lever control for flow and thermostatic temperature adjustment
- Automatic shutdown safety feature should either the hot or cold water supplies fail
- Shower kit - 3 spray rub clean shower head, 1.25m anti-twist hose, 530mm rail with adjustable brackets
- Suitable for all systems, including gravity fed



TRITON | THE UK'S SHOWER COMPANY


For a cleaner conscience

Product Technical Sheet

Dene Sequential

Thermostatic Mixer Shower

Shower	
Temperature Control	Thermostatic
Plumbing System Compatibility	High and low pressure systems
Inlet Fittings	Push-fit for pipe tails
Inlet Connection	15mm female push fit
Outlet Connection	1/2" BSP bottom
Minimum Running Pressure	0.1 Bar
Maximum Running Pressure	5 Bar
Maximum Static Pressure	10 Bar
Open Outlet Flow Rate @ 0.1 Bar	6.2 l/min
Flow Limiters Fitted	8l/max flow
Approvals, Complies with	WRAS
Guarantee	5 years

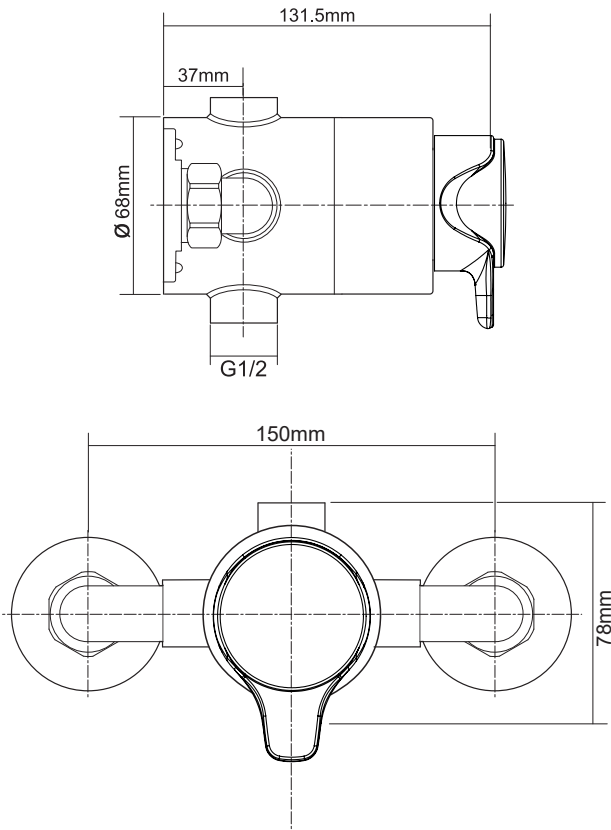

Riser Rail Kit	
Standard version	
Length	Approx 530mm
Diameter	19mm
Material	Stainless steel
Hose	1.25m anti-twist



Lara Multi Spray Shower Head
TSHMLAR3POSCH



1.25m Anti-twist Hose - Chrome
TSHG1203



Lewis Shower Riser Rail
TSKLEWCH

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.
(2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.
(3) The shower will operate down to 0.5 bar at reduced flow rates.