

Mira Minilite

Mixer Shower Range



SUITABLE FOR ALL SYSTEMS



5 YEAR WARRANTY

This compact design helps save space in the bathroom. Perfectly suited to an en-suite.

Product Information

Description	Colour	Product No.
Mira Minilite EV	Chrome	1.1869.001
Mira Minilite BIV	Chrome	1.1869.003
Mira Minilite BIR	Chrome	1.1869.004
Mira Minilite Exposed Valve Only	Chrome	1.1869.005
Mira Minilite B Valve Only	Chrome	1.1869.006

Features & Benefits

Temperature control

Thermostatic temperature stability

Easy to fit

Quickly and easily fits onto reversed inlet supplies

Easy to service

Large, long-life filters and replaceable cartridge

For your customer

A single control for flow and temperature to help you fine tune your perfect shower

Maximum temperature stop – enhances safety (comfort override)

Single sequential temperature and flow control

Mira Magni-flo™ technology delivers up to 3x more flow, even at low pressure

Works on all systems and pressures, even at low pressure

Single spray 9cm showerhead with rub-clean nozzles (except BIR which has a large 200mm deluge showerhead)



Mira Minilite EV



Mira Minilite BIV



Mira Minilite BIR

mira
SHOWERS

Product Specification

Tech Details

Temperature and flow control

Control type: Thermostatic

Installation

Water entry points: Rising, falling or rear

Inlet connections: ½" BSP or 15mm Male Compression (EV & BIV),
16 mm Male Compression (BIR)

Outlet connections: ½" BSP Male Flat Face (EV & BIV),
15mm compression (BIR)

Reversed inlets supported: Yes

Supply Conditions (hot and cold)

Cold water range: Up to 25°C

Hot water range: 60°C-65°C

Minimum maintained pressure: 0.1 bar (1 metre head)

Maximum maintained pressure: 5.0 bar (50 metre head)

Maximum static pressure: 10.0 bar (100 metre head)

Performance

Flow rate (at handset): 10 l/min at 0.5 bar. Supplied with 12 l/min flow regulator (fitted), recommended for pressures greater than 0.5 bar. Optional 6 l/min flow regulator also supplied.

Temperature stability: $\pm 1^\circ\text{C}$

Safety Features

Thermostatic shutdown: Shutdown within 2 secs

Factory set to safe max temp: 41°C

Adjustable maximum temperature for on-site conditions

Accessories

Wide range of accessories available at www.mirashowers.co.uk


Approvals

Buildcert TMV2 Approved


WRAS approved (Water Regulations Advisory Scheme)



Dimensions

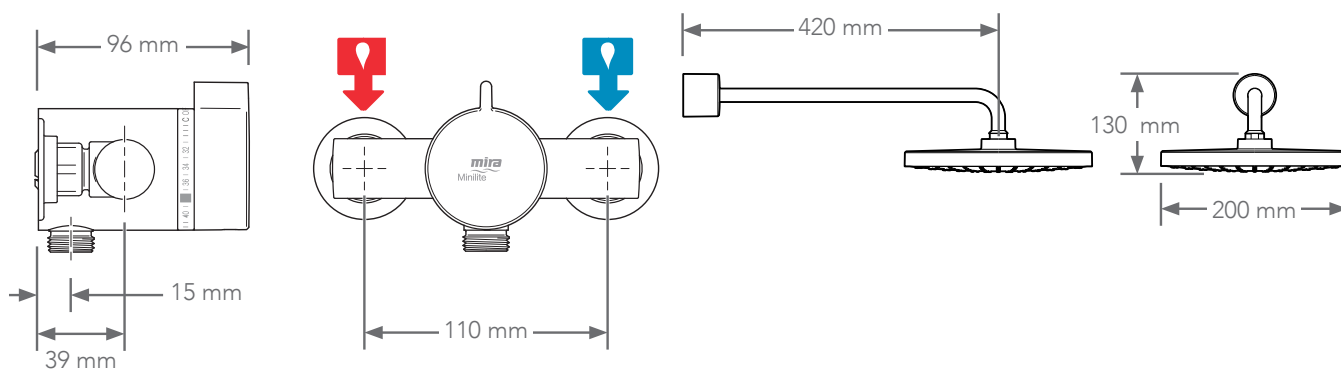

Mira Minilite EV

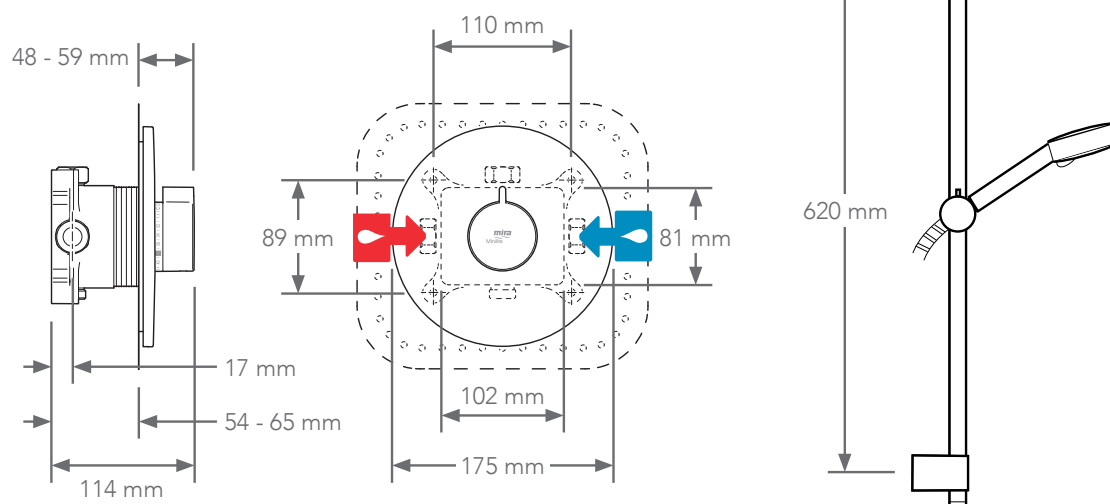

Mira Minilite BIV & BIR

