

Mira Relate Matt Black EV

Mixer Shower Range



SUITABLE FOR ALL SYSTEMS



5 YEAR GUARANTEE

With Mira’s ultra-durable new Matt Black finish, the Mira Relate Matt Black EV combines premium aesthetics with uncompromising quality.

Product Information

Description	Colour	Product No.
Mira Relate EV	Matt Black	1.1878.466

Features & Benefits

Temperature control
Thermostatic temperature stability
Easy to fit
Fast-fix kit for easy installation
Adjustable slide bar covers over previous fittings
Pipe spacer guide included to aid pipework installation during first fix
Front of tile installation system allows connection to pipework during second phase fix after tiling is complete
Easy to service
Large, long life-filters and replaceable cartridge
For your customer
Works on all systems, even at low pressure
Separate flow and temperature controls
Maximum temperature stop for increased safety (with override for a hotter shower)
Ceramic flow control ensures smooth reliable operation throughout the life of your product
Mira Cool Shield™ to ensure valve doesn’t get hot during showering
Mira Magni-flo™ technology delivers up to 3x more flow, even at low pressure
Four spray 110 mm showerhead with rub-clean nozzles
1.25 m flexible smooth shower hose



Product Specification

Tech Details

Temperature and flow control

Temperature control type: Thermostatic

Flow control type: Ceramic

Installation

Water entry points: Rear only

Inlet connections: 15 mm compression joints with pipes;
¾" BSP connection to mixer shower

Outlet connections: ½" BSP Male

Reversed inlets supported: No = hot left, cold right only

Supply Conditions (hot and cold)

Cold water range: 1°C to 25°C

Hot water range: Min 55°C; 60°C - 65°C (recommended)

Minimum maintained pressure (gas water heater) :
1 bar (10 metre head)

Minimum maintained pressure (gravity system) : 0.1 bar (1 metre head)

Maximum maintained pressure: 5.0 bar (50 metre head)

Maximum static pressure: 10.0 bar (100 metre head)

Performance

Flow rate (at handset): 9 L/min at 0.5 bar

Temperature stability: ± 2°C

Safety Features

Automatic shutdown: Shutdown within 2 secs

Factory set to safe maximum temperature

Adjustable maximum temperature for on-site conditions

Approvals


KIWA UK approved product

WRAS approved (Water Regulations Advisory Scheme)

TMV2 approved product



Dimensions

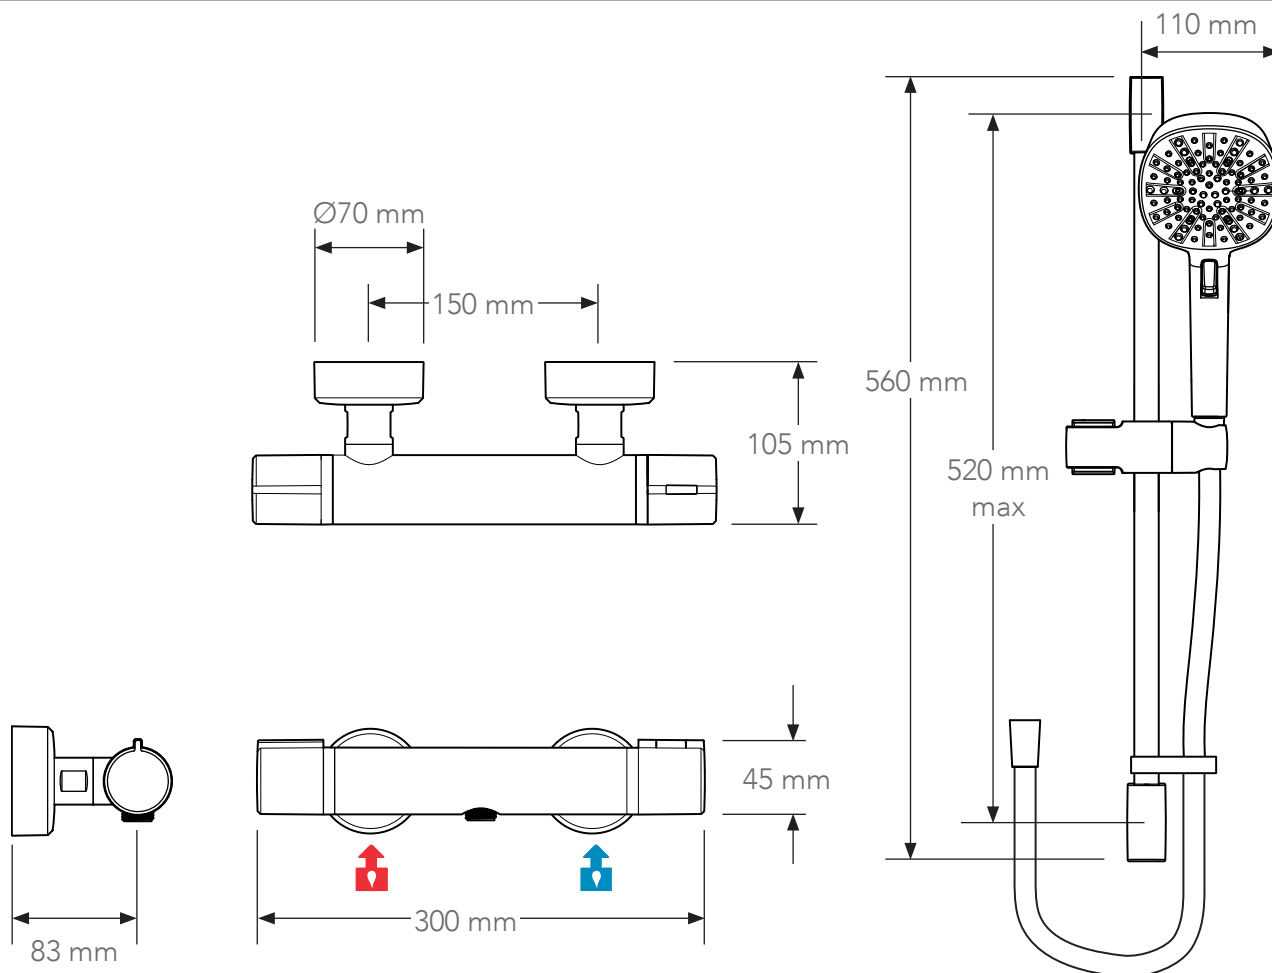

mira
SHOWERS