

Model: DUBAI WHITE 25X44,3(A)

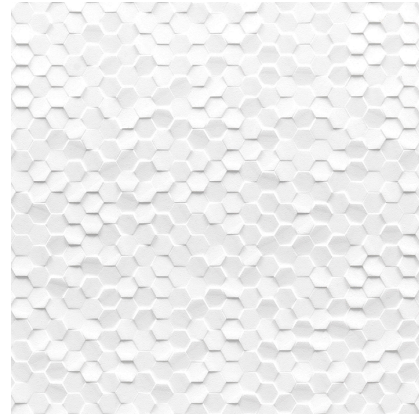
Codes: 100271680

Water absorption: BIII - Cladding Tile ( $10.0\% < w_a \leq 20.0\%$ )

Finish: Glazed / Standard

Tone variations: V1

Rectified: Not





## DIMENSIONAL FEATURES

UNE-EN ISO 10545-2

Thickness	8 mm	+/-5%*
Width	248.4 mm	
Length	443 mm	
Length and width deviation	Below 0.15%	+/-0.3%*
Side straightness deviation	Below 0.15%	+/-0.3%*
Squareness deviation	Below 0.15%	+/-0.3%*
Surface flatness deviation	Below 0.15%	+/-0.4%*

\*ISO-13006:2018 UNE-EN 14411:2016

## FEATURES

-  Natural-looking, non-glossy surface finish.
-  Uniform appearance. All pieces from the same batch are similar
-  Finish with clearly defined protrusions that give the surface a feeling of volume.
-  Wall installation

## MECHANICAL FEATURES

UNE-EN ISO 10545-4-6-7-9-11

Breaking strength	794 N	>600 N*
Crazing resistance	PASS	
Resistance to thermal shock	RESISTE	

\*ISO-13006:2018 UNE-EN 14411:2016

## HYGIENIC FEATURES

UNE-EN ISO 10545-13-14

Chemical resistance	Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases	B Min.*
Stain resistance	Class 5. Easy cleaning with water	3 Min.*

\*ISO-13006:2018 UNE-EN 14411:2016

## ANTI-SLIP VALUE

Reference standards: EN 16165 (Annex A, B, C) - ANSI A326.3 - AS 4586

Friction (dry)	No Aplica	
Friction (wet)	No Aplica	
Dynamic coefficient of friction (dcof)	No Aplica	

\*ISO-13006:2018 UNE 14411:2016 ANSI 137.1 AS 4662

System Certification



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double gluing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.

## DETERMINATION OF LIGHT REFLECTANCE VALUE (LRV)

UNE-EN ISO 10545-18

Determination of light reflectance value (Irv)	70.72	
--	-------	--

\*ISO-13006:2018 UNE-EN 14411:2016

## PACKING

Sales units per box	1.329007 M2/BOX	
---------------------	-----------------	--

Sales units per pallet	90.372454 M2/PAL	
------------------------	------------------	--

Sales units per unit	0.110751 M2/PIECE	
----------------------	-------------------	--

## SCOPE OF USE

Technical code-1	1 - Use on walls	
------------------	------------------	--

System Certification

