


攜帶式磁性鑽孔機

Portable Magnetic Drilling Machine



TC-35

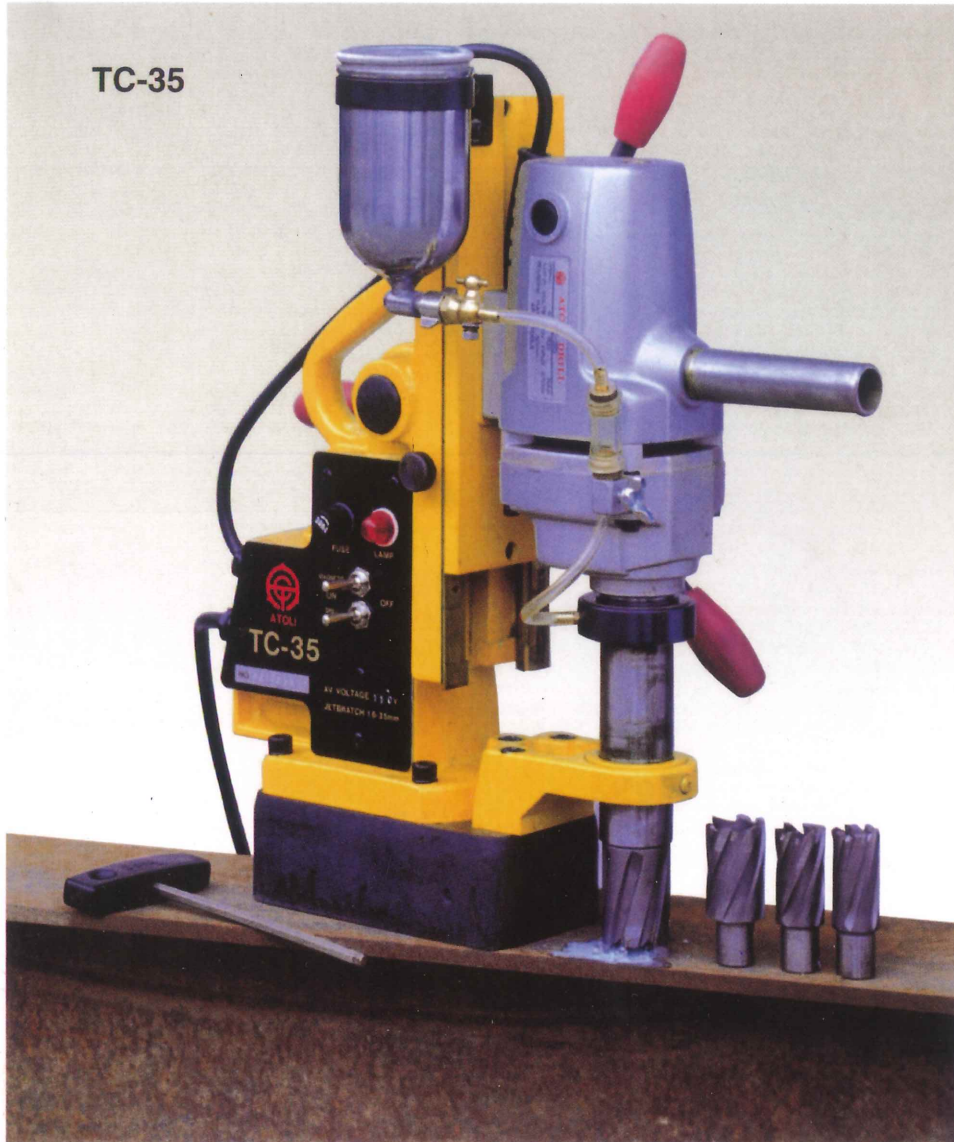

手動操作情形

配件:

1. ATOLI 切削油精一罐。
2. 六角板手一組。
3. 中心頂針: 長、短各一。
4. 說明書一份。
5. 德式T型板手一支。

Accessories:

1. ATOLI Cutter oil: 1 pc
2. Hex.Spanner: 1 set
3. Center pin long and short size each 1 pc
4. Users Manual: 1 copy
5. Genman-type T-spanner: 1 pc

1 低啓動裝置:

低啓動裝置設計, 最適用於高硬度鋼材切割作業。

2 鑽孔力特強:

低啓動裝置設計, 最適用於高硬度鋼材切割作業, 裝配日本TOSHIBA進口電鑽馬達, 鑽孔力特強。

3 不鏽鋼油杯式給油系統:

使用不鏽鋼油杯容量大, 摔不破, 單點控制油槽更換之便捷設計, 即使中途給油不會中斷鑽孔作業。

4 性能卓越, 堅固耐用, 無故障率:

周詳的設計, 將注油器及動力馬達保護在電鑽本體之內, 不受外力衝擊。

1 SLOW START SYSTEM:

The slow start mechanism is designed to cope with cutting hard oxidized surfaces of rolled steel materials.

2 POWERFUL DRILLING:

Low start device design, and most suitably used for cutting of high hardness steel material. Mating to Japanese electric drilling motor, the drilling capacity is extremely powerful.

3 CARTRIDGE TYPE OIL TANK SYSTEM:

Use of stainless steel oil cup with big capacity, never be broken off, single point oil tank control, convenient design for replacement, and even oiling in the middle way, the drilling operation is still unable to be stopped.

4 SOLIDY DESIGNED FOR OUT-STANDING DURABILITY:

Designed with the greatest possible consideration for lasting quality, it is provided with a switch knob protector, an oil dropper inside the electric drill, and the feed motor is fully enclosed within the body of the machine.

電源 (單相)		交流電	交流電
Power Source(Sinde Phase)		110V/120V 50/60HZ	220V/240V 50/60HZ
馬達 Motor	額定馬力輸出 Rated output	670W	
	額定安培 Rated ampaer	6.4 A	3.2 A
	空轉速度 No-load speed	700 r.p.m.	
鑽孔尺寸	直徑 Diameter	13~35m/m	
	最大深度 Max. depth	50m/m	
磁鐵尺寸 Magnet dimensions		174 x 94 x 56m/m	
磁鐵吸持動力 Magnet holding power		800 kg	
重量 Weight		16 kg	

■上述之規格與形體可加以進行變更而無須事前通知。