



LED Lighting | Commercial | Outdoor

LED Wall Pack - Medium Size



Wall Pack With Optional Cap

Applications

- Security, pathway and perimeter lighting
- Building entryways and walkways



Specifications

Specification/Model	2CMB-WL27V-W45-1	2CMB-WL27V-W45-2	2CMB-WL27V-W70-1	2CMB-WL27V-W70-2
Input Power	45W	50W	70W	75W
Lumens Output	3800lm	4000lm	6000lm	6000lm
Efficacy	86 lm/w	81 lm/w	86 lm/w	80 lm/w
LED Chip	Lumileds SMD LED			
CRI	80			
Color Temperature	5000K			
Input Voltage	120-277 VAC	347 VAC	120-277 VAC	347 VAC
Finish Color	Dark Bronze			
Optical Lens	Polycarbonate (UL Recognized) <small>(F1) Suitable for outdoor use with respect to exposure to ultraviolet light, water exposure and immersion in accordance with UL746C</small>			
Mounting	Junction Box Mounting & Direct Wall Mounting			
Photocell	120VAC (UL and CSA Listed) <small>^{3/4} in long threaded nipple, 30-45 second time delay, power consumption: less than 0.9 watts at 120 VAC</small>			

Features

- Sealed die-cast profile for indoor and outdoor applications
- Replaces 100-250W MH
- Lumen output from 3800lm-6000lm
- Voltage configurations: 120-277V and 347V
- Polycarbonate optical lens with UV stabilizers
- Built-in UL class 2 driver, optional for photocell
- Easy installation - contractor-friendly design
- UL/cUL listed and DLC qualified





LED Lighting | Commercial | Outdoor



LED Wall Pack - Medium Size

Ordering Information




Luminaire Type		Power Consumption		Voltage		CCT		Finish	Accessory (option)	Photocell (option)
CP	Canopy	45W	45Watts	27V ¹	100-277V	27K	2700K	B Black(default)	C Cap for DLC	P Photocell
		70W	70Watts	52V ¹	312-528V	30K	3000K	D Dark Bronze		
						40K	4000K	W White		
						50K	5000K			

NOTES: 1. 277V driver operates on 120-277V (50/60 Hz) - Specify 120 and 208-277 options only when ordering with photocell.
 2. 45W and 70W are limited to 100-277V input only; 50W and 75W are limited to 347V input only.

Fixture Dimensions (mm/inch)

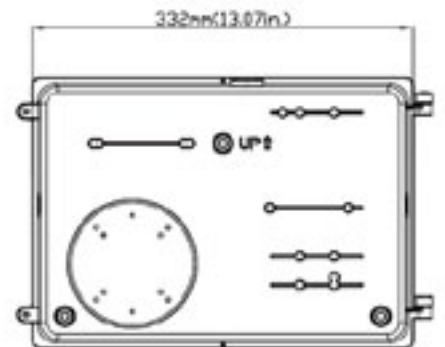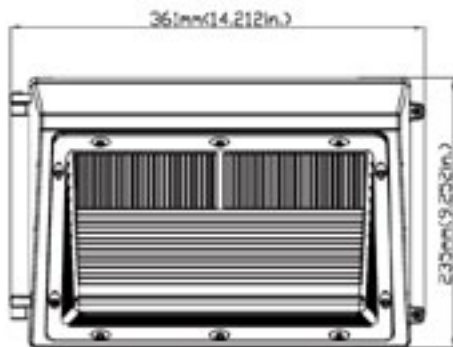

Model with additional cap:

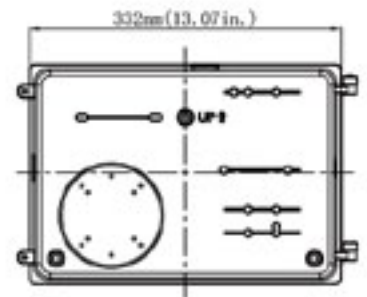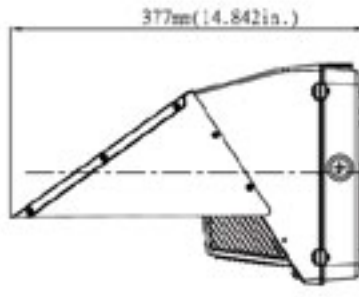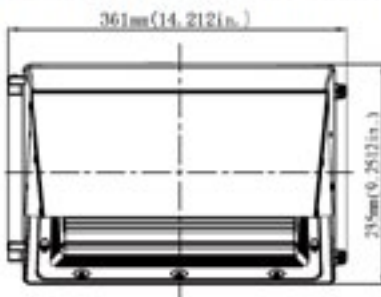



LED Lighting | Commercial | Outdoor

LED Wall Pack - Medium Size


Energy Saving Replacement

Model	Replaces
2CMB-WL27V-W45-1	100W PSMH
2CMB-WL27V-W45-2	150W MH
	165W HID
2CMB-WL27V-W70-1	175W MH
2CMB-WL27V-W70-2	250W MH


Photometrics

2CMB-WL27V-W45-1

Luminous Intensity Distribution Curve




Illuminance at a Distance




2CMB-WL27V-W70-1

Luminous Intensity Distribution Curve




Illuminance at a Distance




2CMB-WL27V-W45-1(with cap)

Luminous Intensity Distribution Curve




Illuminance at a Distance

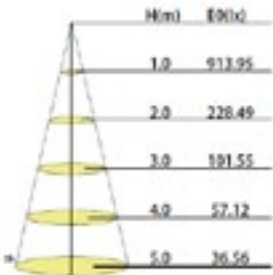

2CMB-WL27V-W70-1(with cap)

Luminous Intensity Distribution Curve



Illuminance at a Distance

