

Single Colour Inground User Data

WE4-IG INGROUND LIGHT 4 WATT 1-4 CHANNEL

Our single colour GU10 Inground takes the technology of our MR16 downlights, encased in a high quality GU10 Inground fitting perfect for external deck lighting.

The WE4 excels on all levels of performance providing a perfect light source, with four high performance Luxeon LEDs, neatly packed into an IP67 stainless steel housing.



Specifications

Physical

- System Colours: Single Colour
- Weight: 850g
- Lamp Depth: 114mm
- Face Diameter: 110mm
- Cut Out Diameter: 88mm

Electrical

- Drive Current: 350-700mA Constant Current
- Power Consumption: 4W @350mA
- Connectivity: RJ45 / 2 Core
- 4 White LEDs

Options

- 15° / 25° / 40° Optic Options
- Colour Temperature: 27k-65k
- Bespoke LED Population
- Bespoke Housing Colours

Operating Conditions

- Operating Ambient Temp Range: -10 °C / +40 °C
- Cooling System: Convection
- Environment: External IP66

Construction

- Face: Stainless Steel
- Housing: Anodised Aluminium
- 1.5m CAT5 RJ45 Cable

Compatible Drivers

- LUD36-D
- LUD48-D
- LUD48-4
- LUD192-D
- Suredim

Installation

- RJ45 / 2 Core Connections

Mounting

- Recessed Floor


Guarantee

- 2 Year Guarantee



WE4-IG Inground Light User Data

Wiring Connections

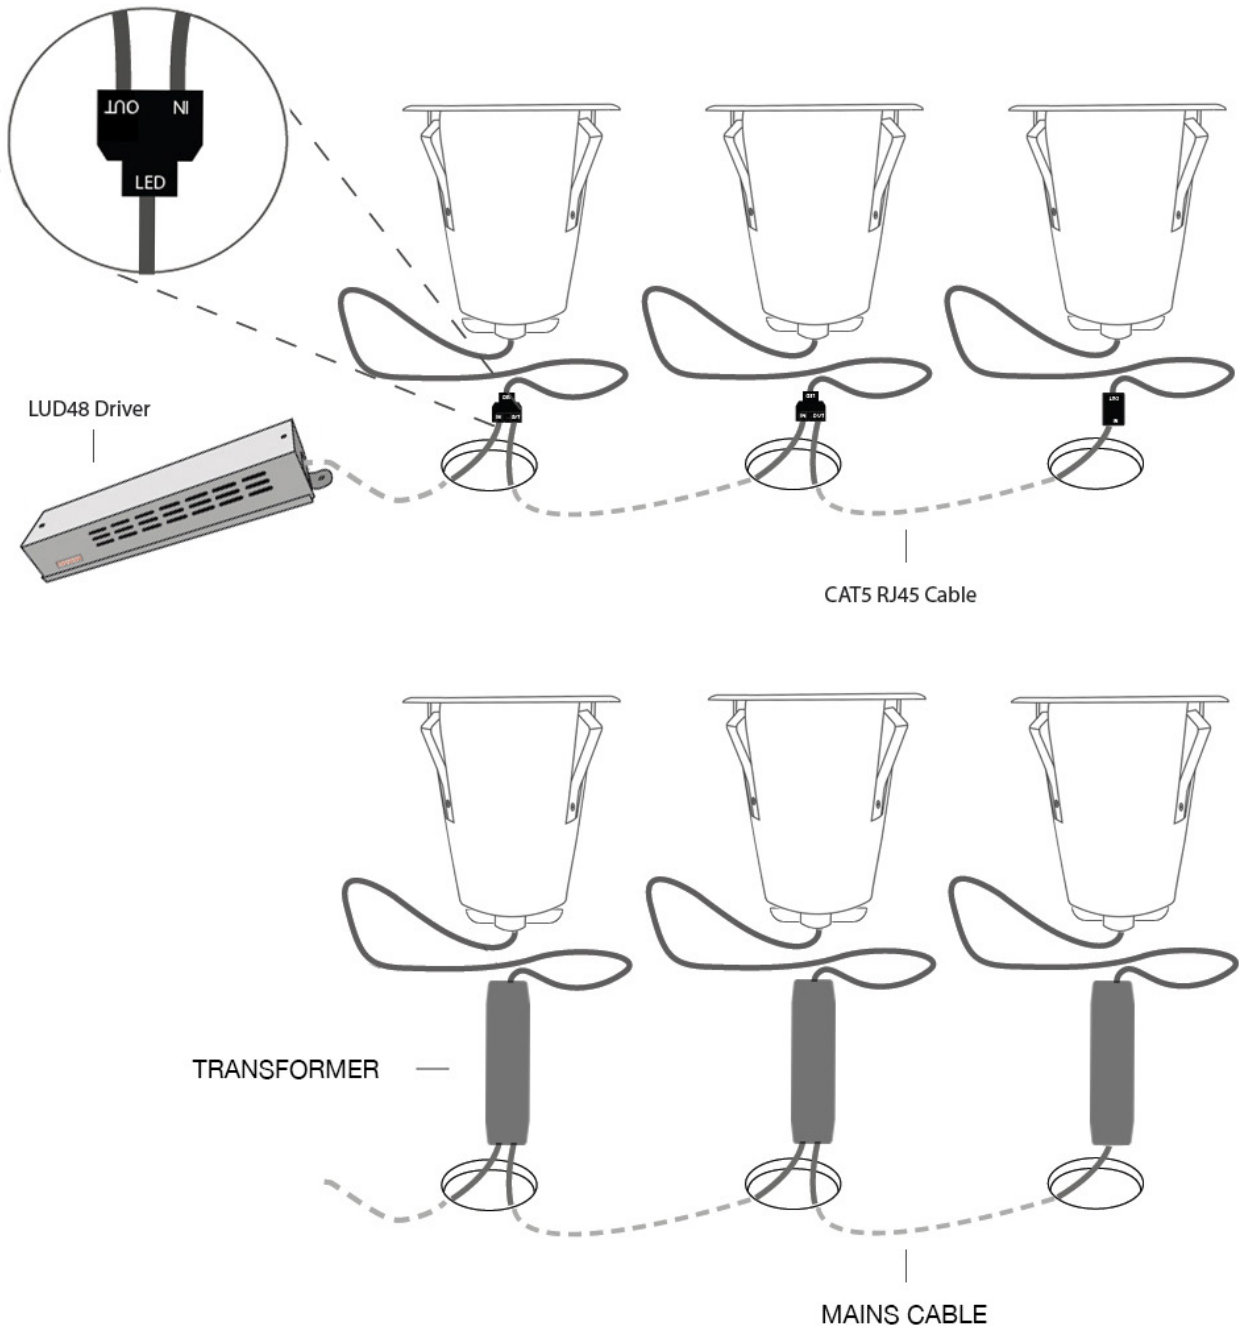

WE4-IG Inground Light User Data

Dimensions

