


# LB08 DMX Controller User Data

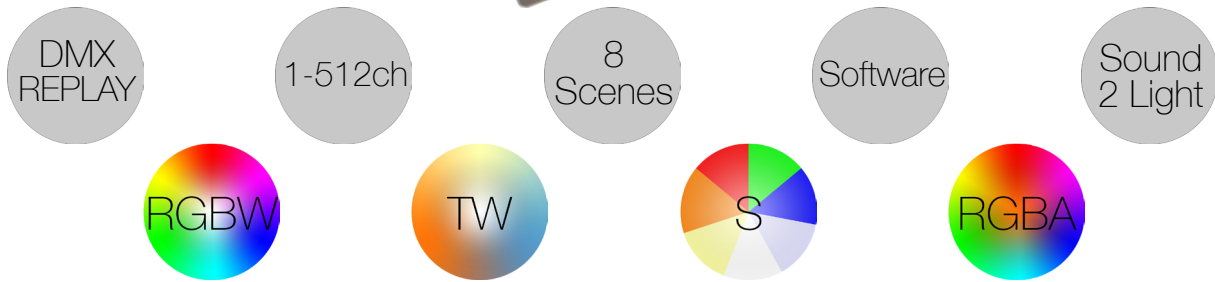

Programmable DMX Replay Unit

–

Windows Compatible Software Included

–

Sound to Light With Onboard Microphone

–

12-48VDC  
Input Voltage

1-512 Channel  
Multi Zone

IP20  
Ingress Protection

RJ45  
Output Connectivity

-10°C / +40°C  
Operating Temp

Cooling System:  
Convection



Tel: +44 (0) 116 278 8078  
Email: [sales@abstractavr.com](mailto:sales@abstractavr.com)  
Website: [www.abstractavr.com](http://www.abstractavr.com)




User Data - Specifications  
Date: 01/11/2016  
Page 1/3

# LB08 DMX Controller User Data

## Dimensions

(Fits Single Patch Box)

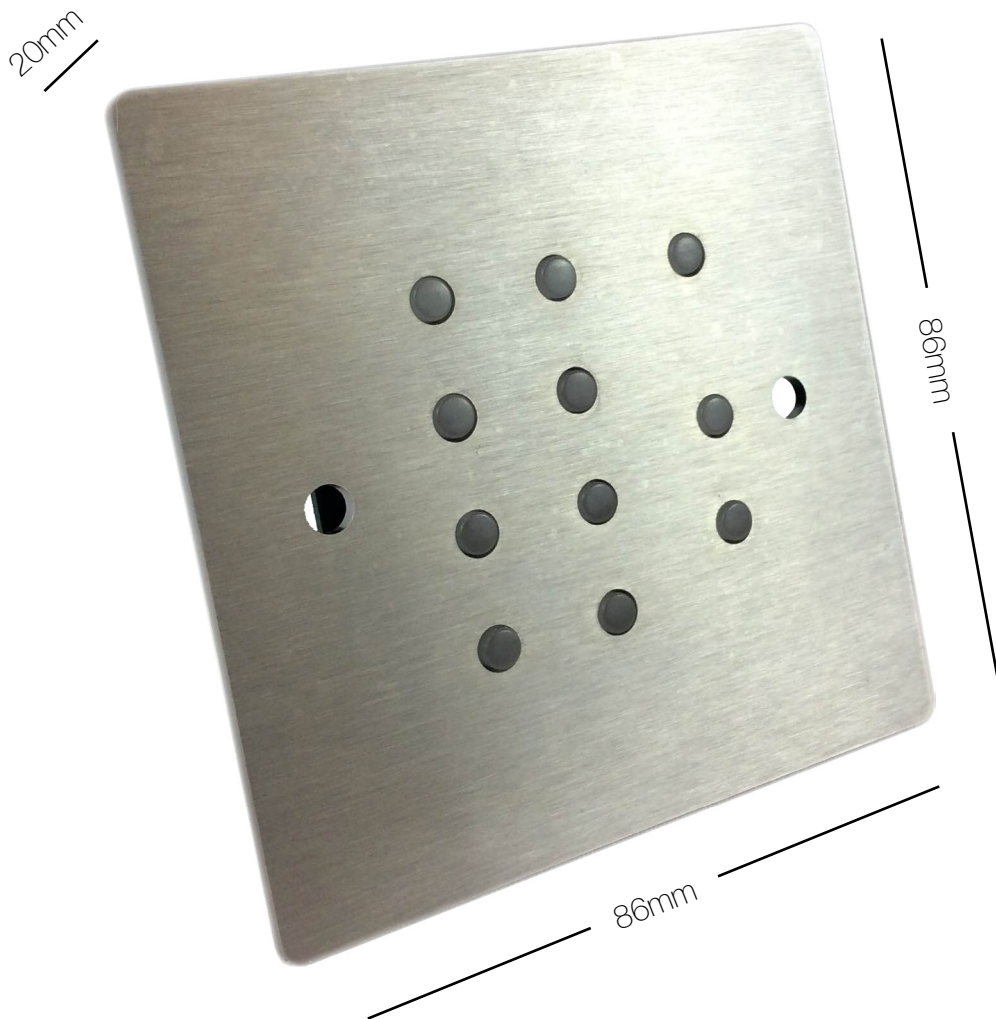

Tel: +44 (0) 116 278 8078  
Email: [sales@abstractavr.com](mailto:sales@abstractavr.com)  
Website: [www.abstractavr.com](http://www.abstractavr.com)



User Data - Dimensions  
Date: 01/11/2016  
Page 2/3

# LB08 DMX Controller User Data

## Wiring Connections

