


LUC01-C DMX Controller User Data

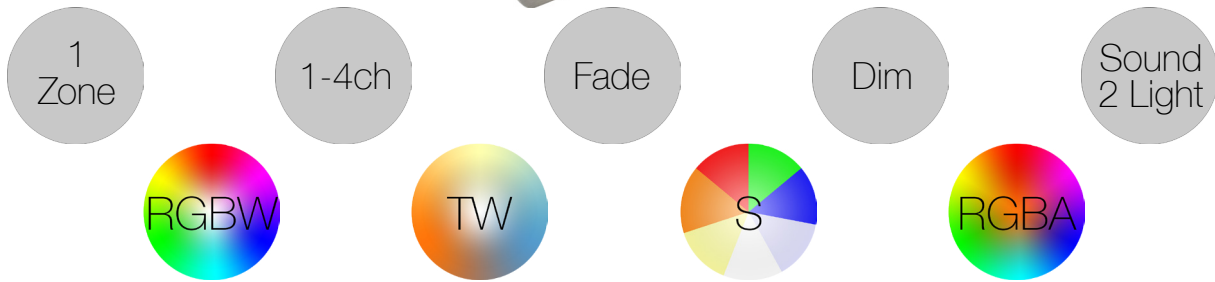

Select a Static Colour

—

Enable a Colour Fade & Control Its Speed

—

Full Colour Dimming

—

Sound to Light With Onboard Microphone

12-48VDC
Input Voltage

1-4 Channel
Single Zone

IP20
Ingress Protection

4 Pin Phoenix
Output Connectivity

-10°C / +40°C
Operating Temp

Cooling System:
Convection



Tel: +44 (0) 116 278 8078
Email: sales@abstractavr.com
Website: www.abstractavr.com



User Data - Specifications
Date: 01/11/2016
Page 1/3

LUC01-C DMX Controller User Data

Dimensions

(Fits Single Patch Box)



Tel: +44 (0) 116 278 8078
Email: sales@abstractavr.com
Website: www.abstractavr.com



User Data - Dimensions
Date: 01/11/2016
Page 2/3

LUC01-C DMX Controller User Data

Wiring Connections

