

# LED INGROUNDS

---

Ingress-protected inground fixtures, ranging from recessed marker lights to impressive up lights, the inground range has the tool to take on those projects where a recessed solution is required.





**CS1 INGROUND**

Outdoor Decking  
Installation.

**IP67**






**CS4 INGROUND**

Outdoor Decking  
Installation.

**IP67**

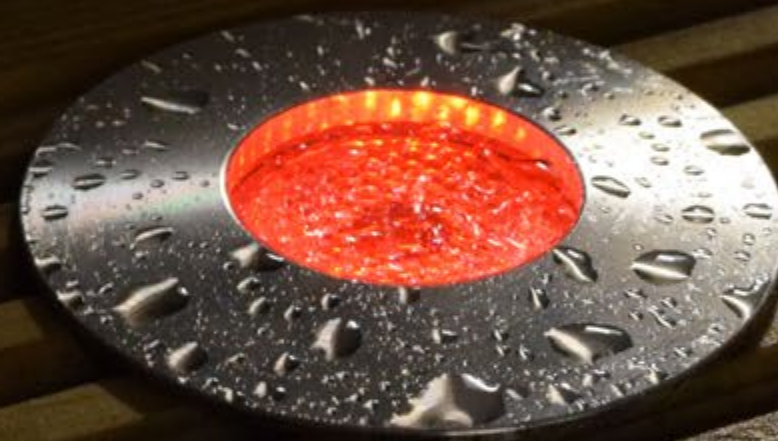




**CS16 INGROUND**

Outdoor Decking  
Installation.

**IP67**

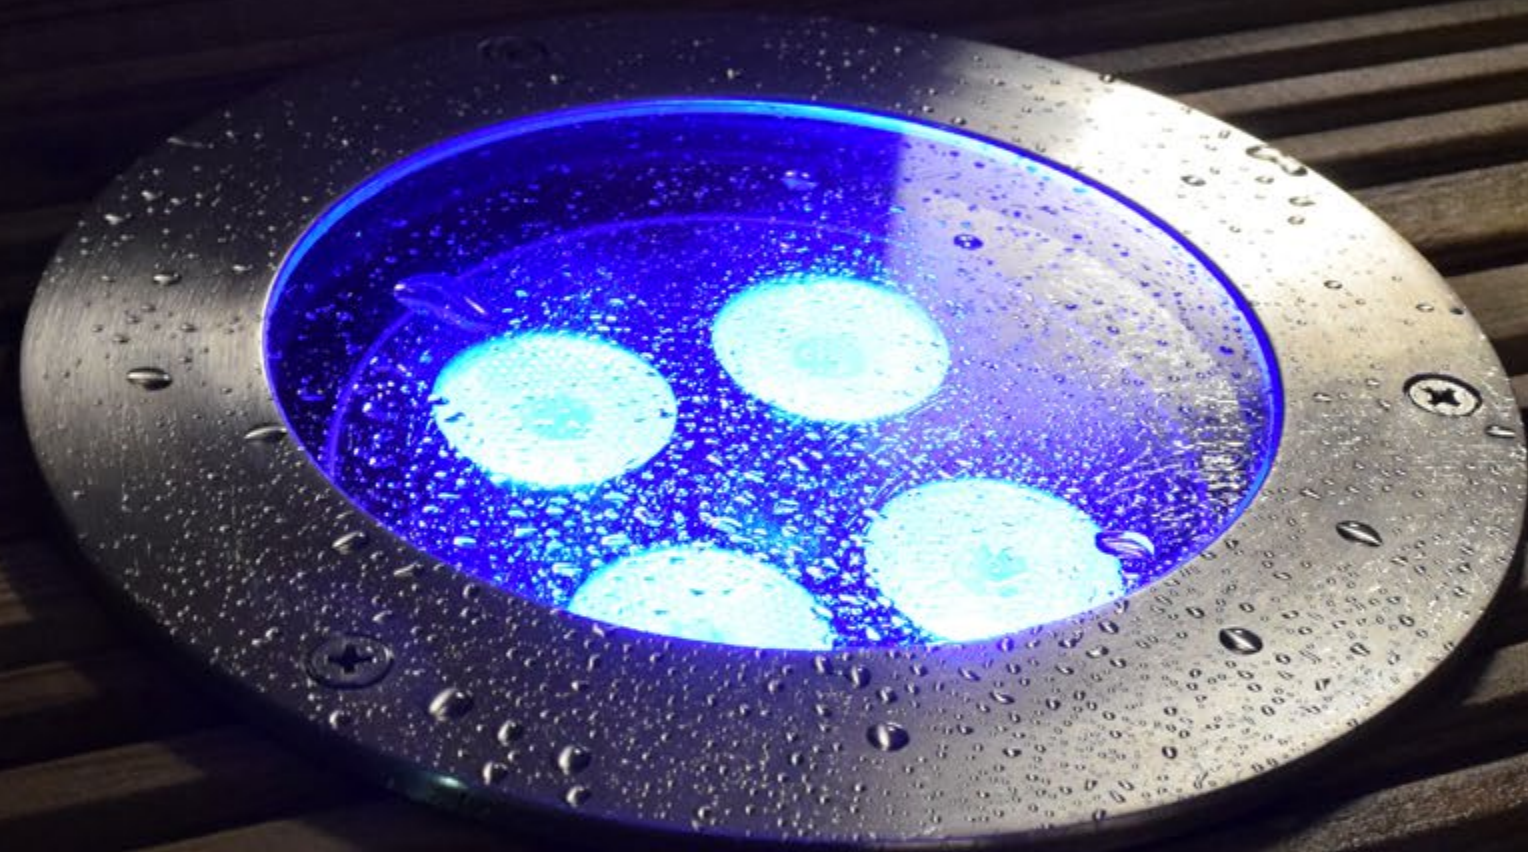





AVAILABLE COLOURS



S/STEEL

# COLOUR SOURCE 1

## CC LED INGROUND

The CS1 might be small, but it is powerful.

One high performance LED thermally managed and housed in a precision engineered IP67 rated anodised aluminium housing.

With 316 stainless steel bezel, this fitting is perfect for step illumination inside or out.

**Product Code: CS1-IGM- R / G / B / A / CW / NW / WW**

### TECHNICAL SPECIFICATIONS

Channels **1Ch**

Wattage **1.2W**

IP Rating **IP67**

LED Type **Single Colour**

Housing Cut Out **32mmØ**

LED Connection **2 Core**

Housing **Anodised Aluminium**

Bezel **316 Stainless Steel**

Lumen Output **67lm[R], 120lm[G], 29lm[B], 73lm[A], 154lm[CW], 146lm [WW]**


Operating Temp Range **-20 to 50 °C**

### OPTIONAL DIFFUSER


Polycarbonate **Clear [8°/25°]**


Polycarbonate **Frosted**

### DIMENSIONS

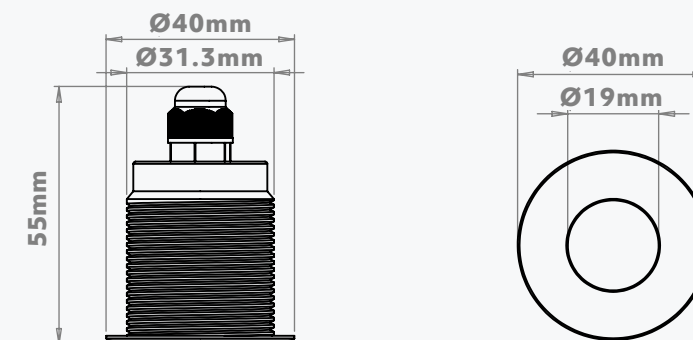

### SINGLE COLOUR OPTIONS

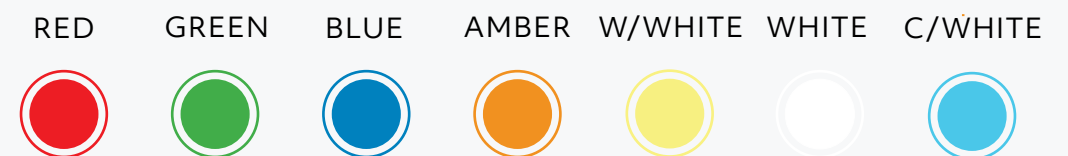

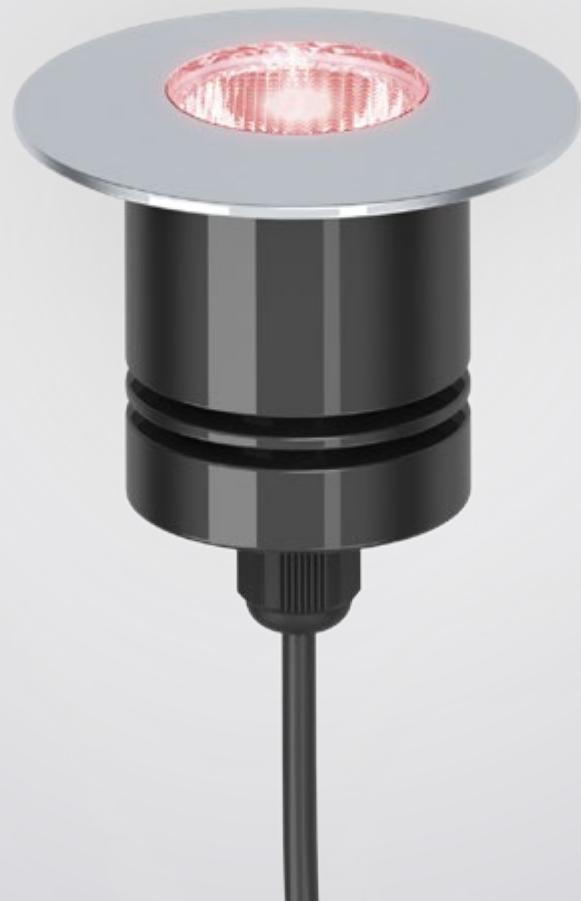

AVAILABLE COLOURS



S/STEEL

# COLOUR SOURCE 4 CC LED INGROUND

Our CS4 Inground encases the same technology of our popular Colour Source 4 downlights into an IP67 rated anodised aluminium housing with 316 stainless steel bezel.

Perfect for external deck lighting.


**Product Code: CS4-IGM- RGBW / RGBA / TW**

**Compatible With : LUD 48 , LUD 192**

## TECHNICAL SPECIFICATIONS

- Channels **4Ch**
- Wattage **4.8W**
- Input Current **350mA**
- IP Rating **IP67**
- LED Type **RGBW / RGBA / TW**
- Housing Cut Out **46mmØ**
- Lens Options **15°/25°/40°**
- LED Connection **RJ45**
- Lumen Output **284lm [RGBW] / 227lm [RGBA] / 446lm [TW]**
- Operating Temp Range **-20 to 50 °C**

## DIMENSIONS

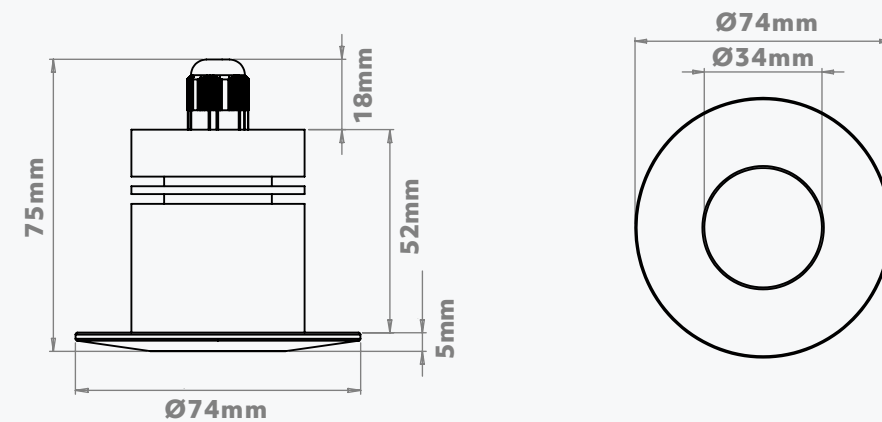

## OPTIONAL LENSES



- Our lense options are:
- 15° : Narrow Beam Angle**
  - 25° : Medium Beam Angle**
  - 40° : Wide Beam Angle**



AVAILABLE COLOURS



S/STEEL

# COLOUR SOURCE 16

## CC LED INGROUND

This Inground encases the same technology of our powerful Colour Source 16 downlights into an IP67 recessed inground housing with a stainless steel bezel.

Perfect for external applications where a powerful wash is required.


**Product Code: CS16-DL- RGBW / RGBA / TW**

**Compatible With : LUD 48 , LUD 192**

### TECHNICAL SPECIFICATIONS

Channels **4Ch**  
Wattage **19.2W**  
Input Current **350mA**  
IP Rating **IP67**  
LED Type **RGBW / RGBA / TW**  
Housing Cut Out **153 x 183mmØ**  
Lens Options **15°/25°/40°**  
LED Connection **RJ45**  
Lumen Output **1,136lm [RGBW] / 908lm [RGBA] / 1,784lm [TW]**  
Operating Temp Range **-20 to 50 °C**

### DIMENSIONS

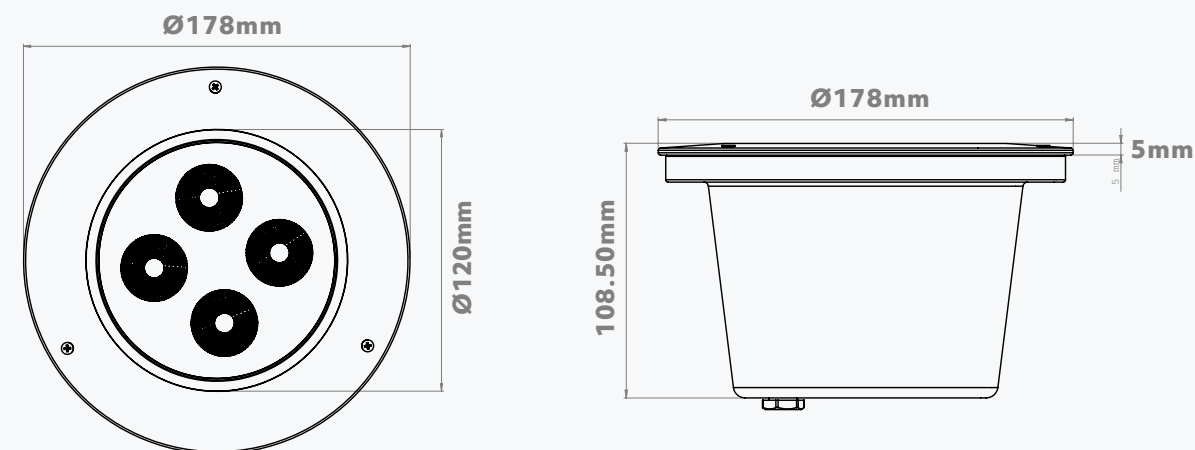

### OPTIONAL LENSES



Our lense options are:  
**15° : Narrow Beam Angle**  
**25° : Medium Beam Angle**  
**40° : Wide Beam Angle**