LED WASH LIGHTS

Illuminate the Skyline with our range of external grade wash lights, giving lighting professionals the tools to add colour to a wide range of applications.







sales@abstract.co.uk www.abstract.co.uk



SKYLINE 4

CC LED WASH LIGHT

The SL4 packs a powerful colour mix at source with the latest in multi-chip LED technology.

It is neatly packed into and thermally managed by an IP65 rated aluminium housing, making this fitting suitable for a wide variety of applications.

Product Code: SL4-WL- RGBW / RGBA / TW

Compatible With: LUD 48, LUD 192

TECHNICAL SPECIFICATIONS

Channels **4Ch**Wattage **19.2W**Input Current **350mA**IP Rating **IP65**


LED Type **RGBW / RGBA / TW**Housing Options **Grey / White / Black**


Lens Options 15°/25°/40° LED Connection RJ45

Lumen Output 1,136lm [RGBW] / 908lm [RGBA] / 1,784lm [TW]

Operating Temp Range -20 to 50 °C

DIMENSIONS





OPTIONAL PROTECTION COVER



HARSH ENVIRONMENT COVER

For harsh environments this cover is fitted around the front of the SKYLINE unit to give it maximum protection.



SKYLINE 8

CC LED WASH LIGHT

The SL8 packs a powerful colour mix at source with the latest in multi-chip LED technology.

It is neatly packed into and thermally managed by an IP65 rated aluminium housing, making this fitting suitable for a wide variety of applications.

Product Code: SL8-WL- RGBW / RGBA / TW

Compatible With: LUD 48, LUD 192

TECHNICAL SPECIFICATIONS

Channels 4Ch
Wattage 38.4W
Input Current 350mA
IP Rating IP65


LED Type RGBW / RGBA / TW
Housing Options Grey / White / Black
Lens Options 15°/25°/40°


LED Connection RJ45

Lumen Output 2,272lm [RGBW] / 1,816lm [RGBA] / 3,568lm [TW]

Operating Temp Range -20 to 50 °C

DIMENSIONS






OPTIONAL PROTECTION COVER



HARSH ENVIRONMENT COVER

For harsh environments this cover is fitted around the front of the SKYLINE unit to give it maximum protection.

LED WASH LIGHTS - SL12

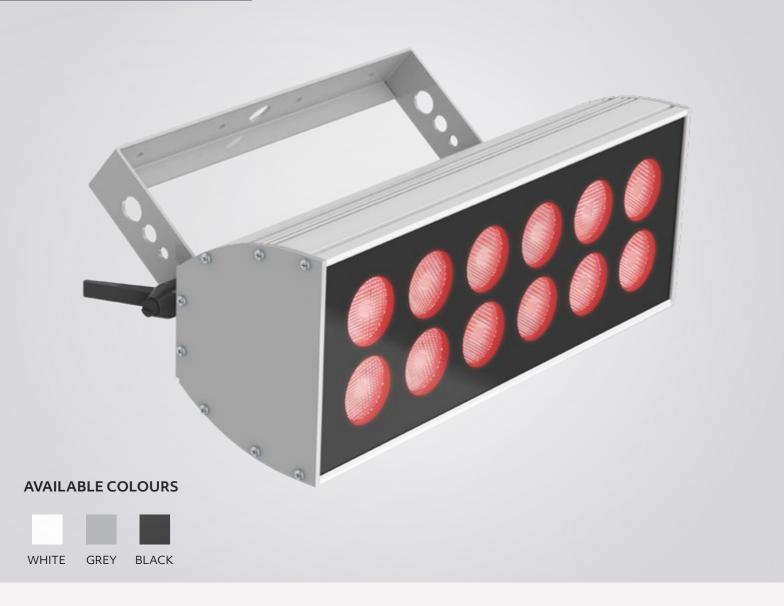

SKYLINE 12

CC LED WASH LIGHT

The SL12 packs a powerful colour mix at source with the latest in multi-chip LED technology.

It is neatly packed into and thermally managed by an IP65 rated aluminium housing, making this fitting suitable for a wide variety of applications.

Product Code: SL12-WL- RGBW / RGBA / TW

Compatible With: LUD 48, LUD 192

TECHNICAL SPECIFICATIONS

Channels 4Ch
Wattage 57.6W
Input Current 350mA
IP Rating IP65


LED Type RGBW / RGBA / TW
Housing Options Grey / White / Black
Lens Options 15°/25°/40°

LED Connection **RJ45**

Lumen Output 3,408lm [RGBW] / 2,724lm [RGBA] / 5,352lm [TW]

Operating Temp Range -20 to 50 °C

DIMENSIONS

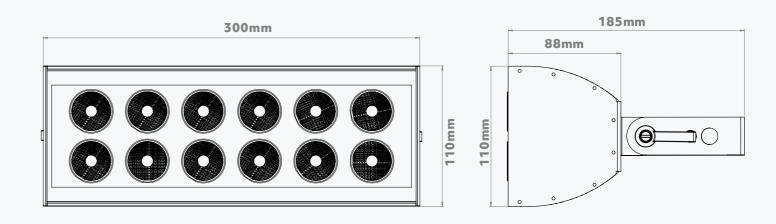

OPTIONAL PROTECTION COVER



HARSH ENVIRONMENT COVER

For harsh environments this cover is fitted around the front of the SKYLINE unit to give it maximum protection.