TECHNICAL SPECIFICATIONS

Voltage **5V / 12V / 24V**
LED Outputs **1**
Output Current **5A**
Power Consumption **75W**
Tape Capability **Run Upto 150 Pixels**
Power Input Mains **110-240VAC**
Data Connections **3 Pin XLR / RJ45**
LED Connection **5 Pin Phoenix Connector**
Operating Temp Range **-20° to 50°C**

DIMENSIONS

196mm
160mm
43mm

154mm
144mm
43mm

AVAILABLE COLOURS

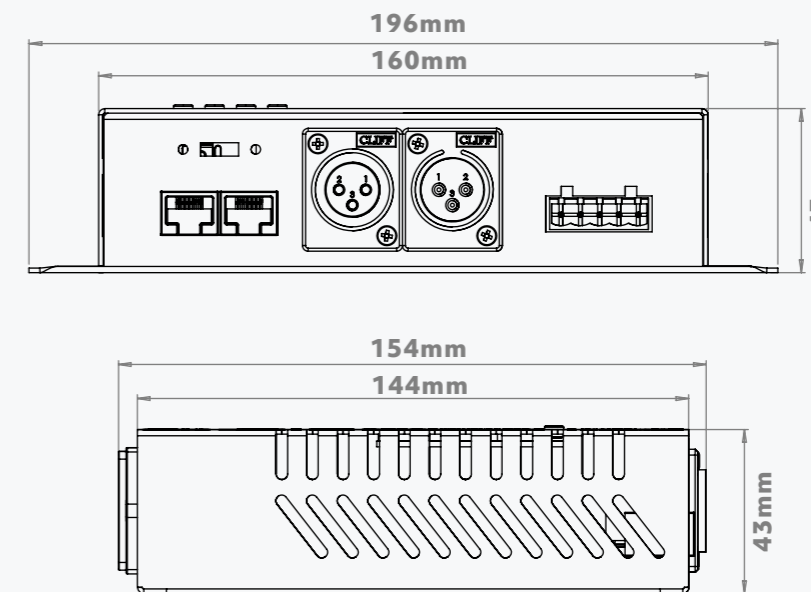WHITE   GREY   BLACK

PIXEL DRIVER 75

PIXEL LED DMX DRIVER

Incredible pixel output with just mains and DMX input, this compact driver makes pixel technology simple. Control up to 170 RGB or 128 RGBW individual pixels, or save your DMX channels by grouping pixels directly from the driver's on board display.

Product Code: PXL-75- 5V / 12V / 24V

CONNECTIONS

3 PIN XLR (DMX)

Connect in/out for continuous data if more drivers are required.

LED INPUT

RJ45 (DMX)

Connect in/out for continuous data if more drivers are required.

sales@abstract.co.uk
www.abstract.co.uk
T: +44 (0)116 278 8078
Open Mon - Fri   8am - 5pm