


TECHNICAL SPECIFICATIONS

Voltage **5V**
 LED's Per Meter **60**
 LED Type **SMD5050**
 Power Consumption **14.4W/M [RGB] / 19.2W/M [RGBW]**
 Channels **3Ch [RGB] / 4Ch [RGBW]** per pixel
 IP Rating **IP20**
 Cutting Points **33mm**
 Controllable Pixels **1 LED = 1 Pixel**
 Lumen Output **980lm/M [RGB] / 1,440lm/M [RGBW]**
 Operating Temp Range **-20° to 50°C**


DIMENSIONS

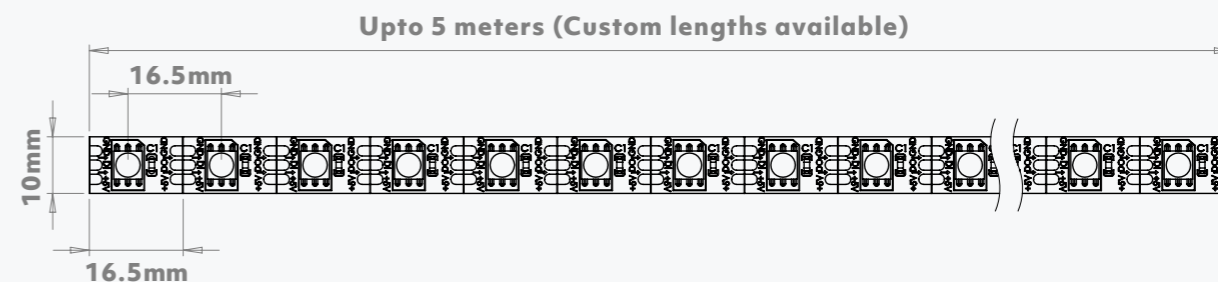

LED TECHNOLOGY

SMD5050 RGB LED

High quality epistar LED chip, with high output and vivid colour rendering, paired with onboard IC processor for pixel addressing.

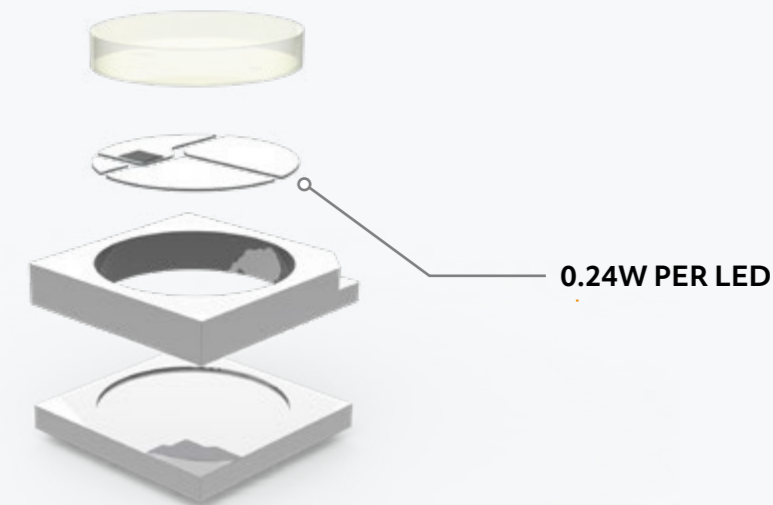

AVAILABLE COLOUR MIX



HIGH POWER 60 LED/M 5V PIXEL LED FLEXIBLE STRIP

Cuttable, stickable, reliable... addressable! 60LED/M colour changing flexible pixel LED, enabling you to get creative with high output, vivid colours and individual LED pixel control.

Designed for ease of installation and for peace of mind with high reliability as a must.

Product Code: PF-HP- RGB / RGBW -5V- [IP]