



# SLIDE LATCH

COMPONENT GUYS INC.




- Three sizes with slide ratings for 8, 25 and 50 lbs.
- Small footprint yet strong holding capacity
- Easily retrofitted into molds with existing slides

## Available sizes


ITEM# NUMBER	MAXIMUM RECOMMENDED HOLDING WEIGHT
SLK-8A	8 POUNDS
SLK-25A	25 POUNDS
SLK-50A	50 POUNDS

SKD11  
Hrc 56-58


## Design Guideline

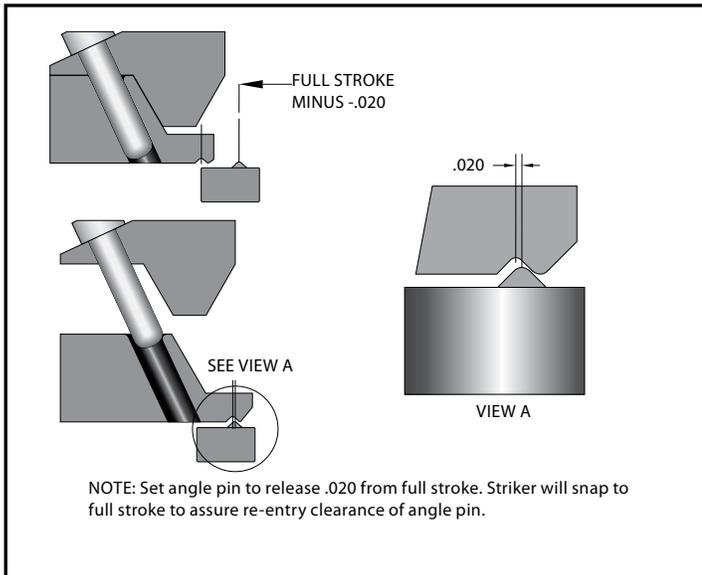


## Part Number : SLK-8A Rated for 8lbs

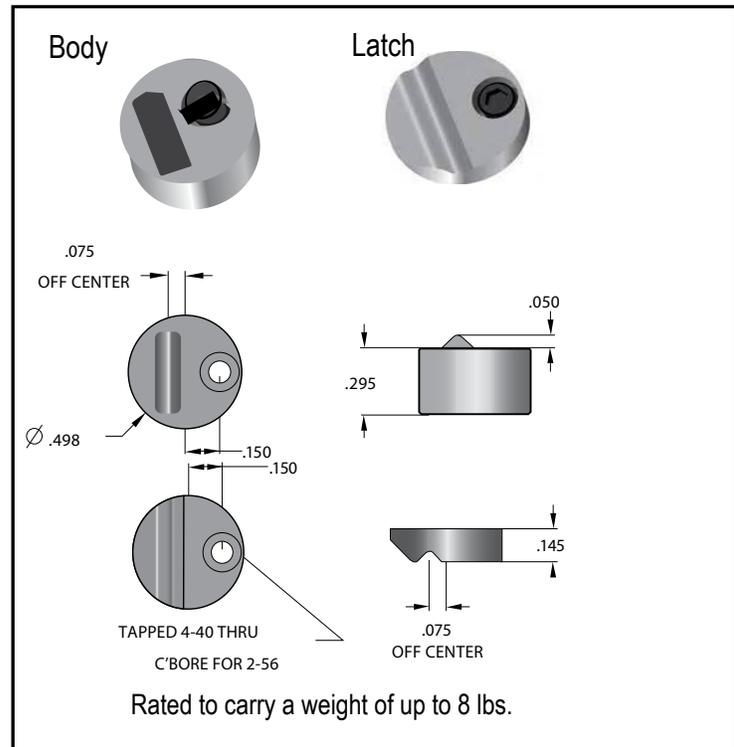

## Installation - Lock

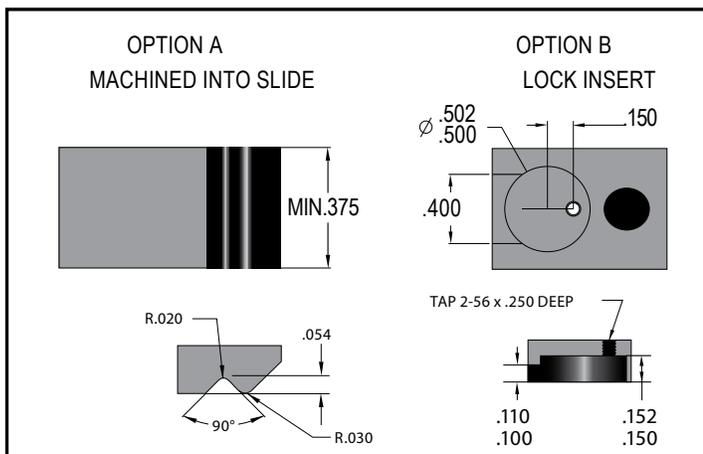

## Installation - Body

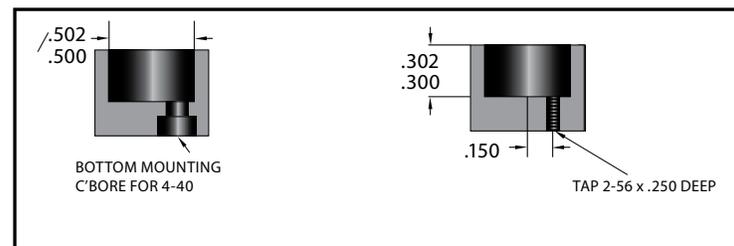



COMPONENT GUYS INC.

# SLIDE LATCH

**Part Number : SLK-25A** Rated for 25 lbs.

**BODY**

**LATCH**

Rated to carry a weight of up to 25lbs

TAPPED 10-32 FOR BOTTOM MOUNTING C'BORE 6-32 SHCS FOR TOP MOUNTING

**Design Guideline**

NOTE: Set angle pin to release .030 from full stroke. Striker will snap to full stroke to assure re-entry clearance of angle pin.

## Installation - Lock

**OPTION A**  
MACHINED INTO SLIDE

**OPTION B**  
LOCK INSERT

## Installation - Body

**Part Number : SLK-50A** Rated for 50lbs

TAPPED 5/16-18 FOR BOTTOM MOUNTING C'BORE 1/4-20 SHCS FOR TOP MOUNTING

Rated to carry a weight of up to 50lbs

## Installation - Body

## Design Guidelines

NOTE: Set angle pin to release .030 - .050 from full stroke. Striker will snap to full stroke to assure re-entry clearance of angle pin.

## Installation - Lock

**OPTION A**  
MACHINED INTO SLIDE

**OPTION B**  
LOCK INSERT